

SIMPLEX® CEILINGS

255 Montpellier, St. Laurent
(Montreal) QC, Canada H4N 2G3
Tel: (800) 638-5726 Fax (514) 744-2716
www.simplexceilings.com


Specifications

Curved Interior Snap-In Series

- Panels:** Provide Simplex **Curved Interior Snap-In** system manufactured from 0.032" (0.81mm), 0.040" (1.0 mm), thick aluminum, galvanized steel, and stainless steel. Panel dimensions will be as shown on drawings. Panels to be un-perforated or perforated with a un-perforated border, using pattern defined by the architect.
- Finish:** Select from Simplex Ceiling standards for panels. Custom colors available upon request.
- Suspension:** Suspension shall be Snap Tee Bar direct or indirect
- Perimeter:** Provide curved "L" or straight Box Mold with Hold down Clips as required in finish to match panels.
- Acoustical:** For perforated panels, provide a 0.008" (0.2mm) thick Simplex "T" non-woven acoustical textile to be bonded to the inside face of the panels. Can also be provided in 1-1/2" (38 mm) thick x 3/4 lb/cu.ft (12 kg/m³) density glass wool fiber completely sealed in an incombustible bag and installed with accordion pad spacers placed between the panel back and acoustical pad.

Standard Sizes:	24" x 24"	24" x 36"	24" x 48"	24" x 60"
Metric Sizes (mm):	610 x 610	610 x 914	305 x 1219	610 x 1524

(Other custom sizes available upon request)

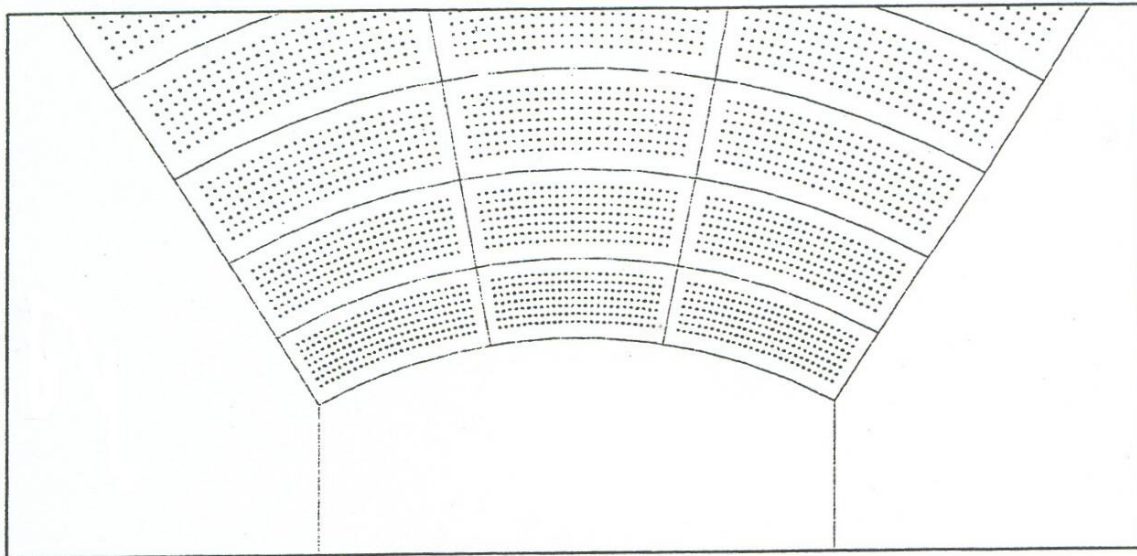


DIMENSIONS
T = 1" (25.4mm)
B = 1.125" (29mm)
D = 24" (610mm)

The minimum radius is:

For Vaults
R = 4' 0" (1219 mm)

For Valleys
R = 4' 0" (1219 mm)

Suspension Detail

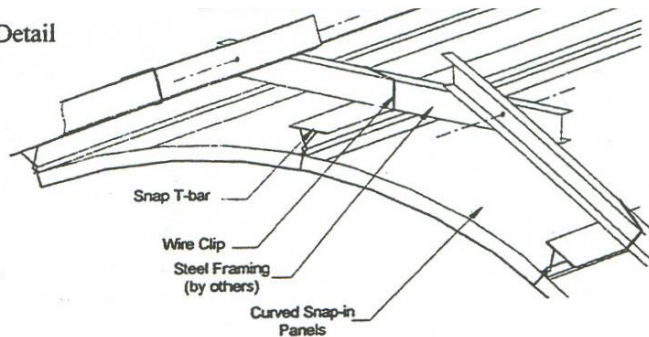

Not to Scale