


SIMPLEX® CEILINGS

255 Montpelier, St. Laurent
(Montreal) QC, Canada H4N 2G3
Tel: (800) 638-5726 Fax (514) 744-2716
www.simplexceilings.com

Specifications

Curved Ripple-Ceiling Series

- Panels:** Provide Simplex Curved Rippletone / Rippletex (perforated with textile) / Curved Ripplesound (perforated with no textile) / Curved Ripplefoil (un-perforated) corrugated ceilings, made from 0.014" thick aluminum supplied in rolls. Nominal width shall be 39.37" (1000mm). Ripplesound, Rippletone and Rippletex ceiling to be perforated with a Ø0.093" holes at 0.263" diagonal (45°) centers to centers, having 10% open area.
- Finish:** Simplex Ripple-Ceiling Series standard colors: Off-White and Natural Clear coat. Other available colors from Simplex Ripple-Ceiling Series powder coats color range. (For Rippletone, minimum quantity of 10,775 ft² (1,000 m²))
- Suspension:** Direct mount Support Clip to Steel framing or structure overhead. Attach Support Clip to extruded aluminum fast track support bar. Corrugated ceiling is then drawn between adjacent fast track support bars. The support bar can be provided in a straight or curved length. Starter bar assembly allows entry of the corrugated Ripple system into the fast track support bars.
- Perimeter:** Provide wall angle (straight or curved) and / or straight perimeter cap and / or curved floating angle in finishes as required to match panels.
- Acoustical:** Provide acoustical blanket of sufficient thickness and density to achieve required NRC value (For Ripplesound)
- Accessibility:** System is accessible through access panels only..

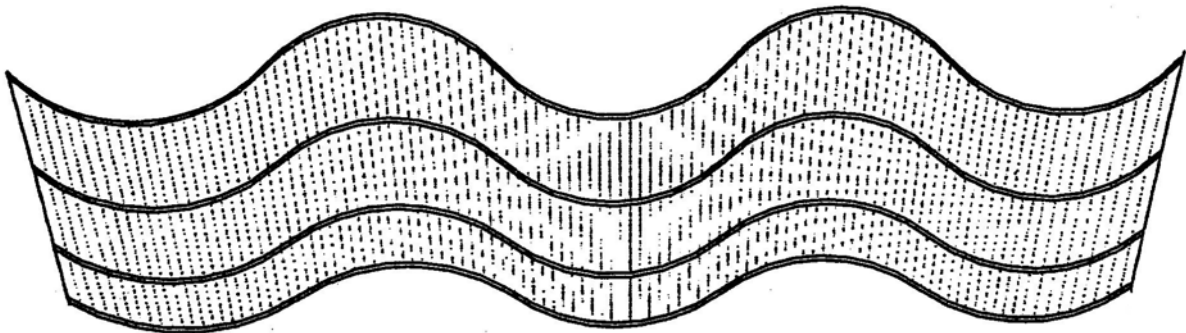

Minimum radius:

Vaults

R = 59" (1.5m)

Valleys

R = 59" (1.5m)

