


Product and Cut-out Dimensions

G4270SCVi and G5570SCVi

ADA Compliant Series Dishwashers

Fully Integrated Models

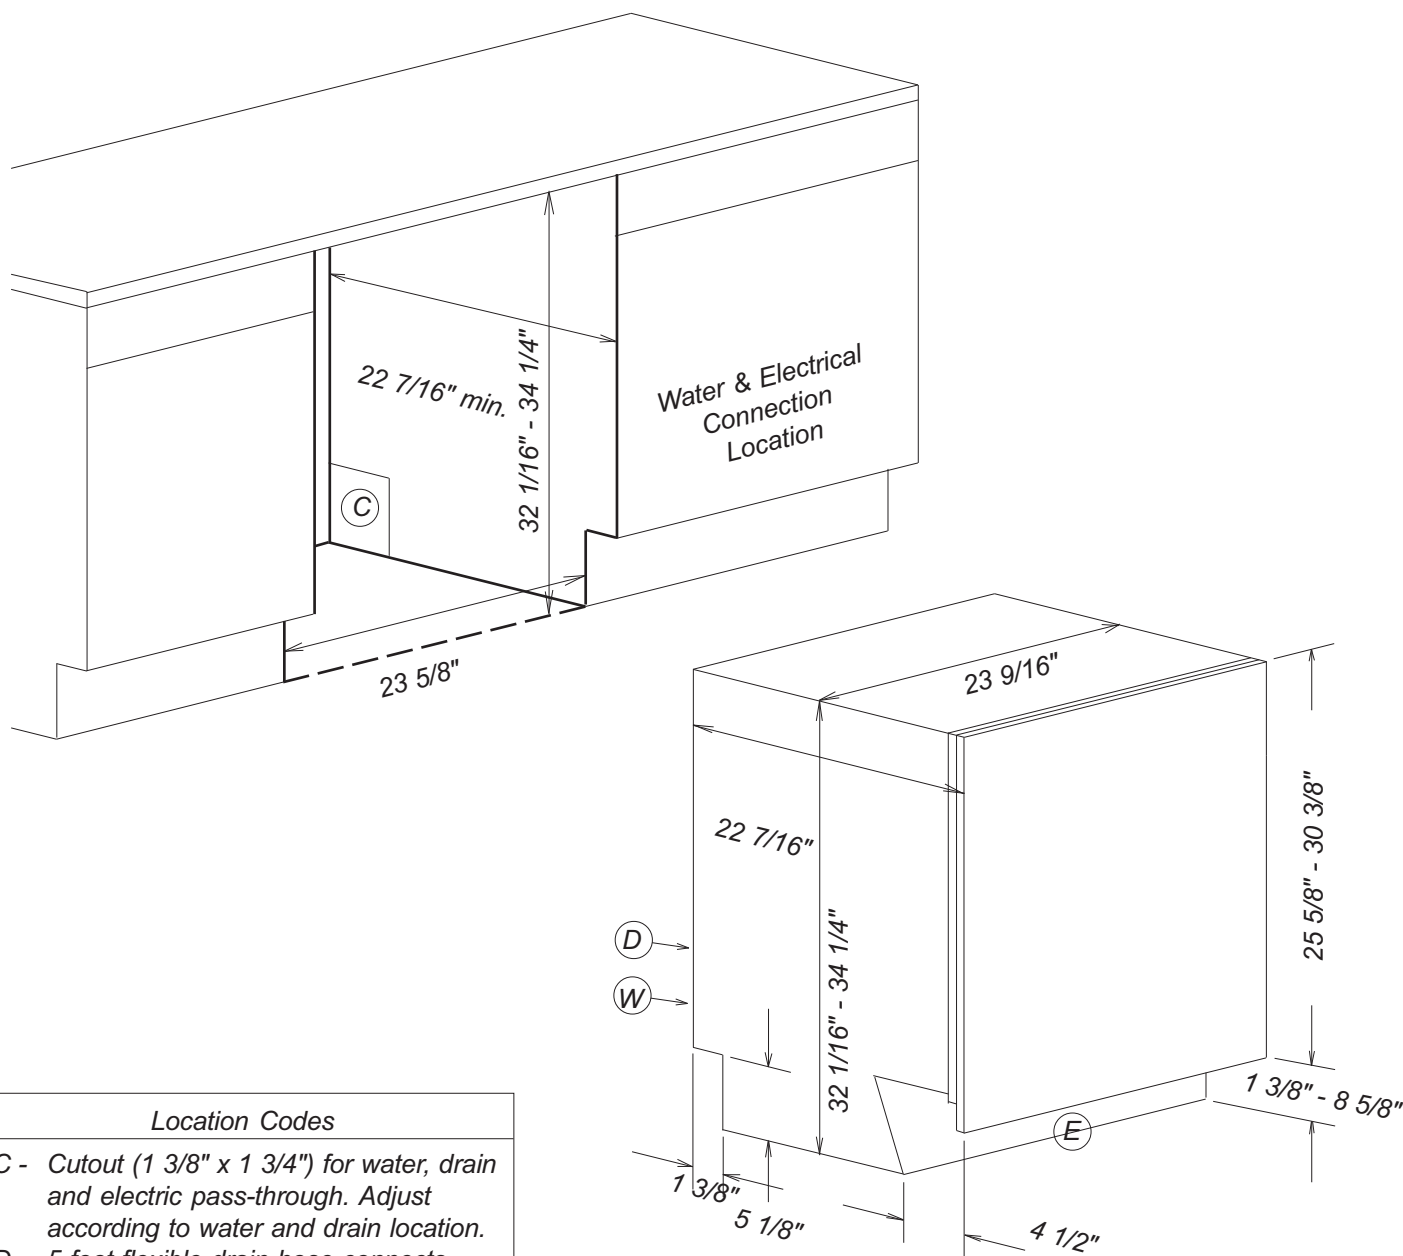

Location Codes
C - Cutout ($1 \frac{3}{8}" \times 1 \frac{3}{4}"$) for water, drain and electric pass-through. Adjust according to water and drain location.
D - 5 foot flexible drain hose connects lower center rear.
E - 5 foot - 120 Volt - 15 Amp 3-wire molded plug power supply connects front toe kick area.
W - 5 foot flexible water intake hose with a $\frac{3}{8}"$ compression fitting nut connects lower center rear.
Notes
• All installations must be done in accordance with local codes

Product and Cut-out Dimensions

G4270SCVi and G5570SCVi

ADA Compliant Series Dishwashers


Fully Integrated Models



Custom Panel Installations

Some Miele dishwashers do not come equipped with a front panel. These dishwashers are designed to accept a custom door panel supplied by the cabinet maker. Miele has a unique panel integration system which allows the dishwasher to align with the surrounding cabinets.

Panel size is determined in the following manner:

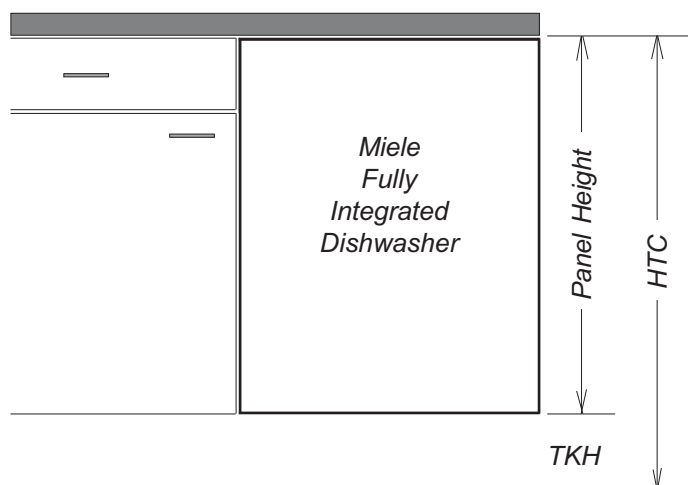

Width: 23 7/16" in all cases

Thickness: 3/4" in all cases

Height: Determined using the following calculation:

$$\text{Panel Height} = \text{HTC} - \text{TKH}$$

HTC = Height to the underside of countertop

TKH = Toe-kick height

Note: Control panel is along the top edge of the unit. It is not visible when the unit is closed.
A handle **MUST** be located on the front panel in order to open the unit

Maximum panel height: 30 3/8"

Minimum panel height: 25 5/8"

Maximum panel weight: 21Pounds

GFVi Panel Installations

Miele offers pre-fabricated stainless steel panels for all fully integrated units. These panels are designed for various toe-kick heights and offer a choice of handle options.