


CEILING FIXTURE INSTALLATION



Elkader, IA Made in the USA





(1) Crossbar & Ground screw




(2) Black 8/32 Machine Screw




(1) Hex Nut





Tools Needed:






Assembly:

WARNING: RISK OF FIRE AND ELECTIRC SHOCK. THIS PRODUCT IS TO BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY.

- At the circuit breaker/fuse box, turn off power to the junction box where the fixture is to be installed.
- (figure 1) Pull the positive and negative wires from the junction box through the center hole in the Crossbar.
- 3. (figure 1) Make a hook out of the green or bare copper ground wire and place it over the mounting hole in the Crossbar. Screw in the green ground screw to secure the ground wire to the Crossbar.
- (figure 1) Screw in the two junction box screws through the slots in the Crossbar to secure the crossbar to the junction box.
- 5. (figure 2) Feed the cord through the Cord Grip, the Ceiling Plate, and finally the hex nut. Screw the cord grip into the hex nut. Tighten the set screw on the Cord Grip so that the cord doesn't slip through the cordgrip. Finally, tie the cord into an overhand knot above the Ceiling Canopy.
- 6. (figure 2) Use the Wire Nuts to connect the positive and negative wires. The white side of the wire coming from the fixture should connect to the neutral or white wire. The black wire from the fixture should connect to the hot or black wire from the junction box.
- (figure 2) Screw the Ceiling Plate into the crossbar with the Black 8/32 Machine Screws to secure the fixture to ceiling.

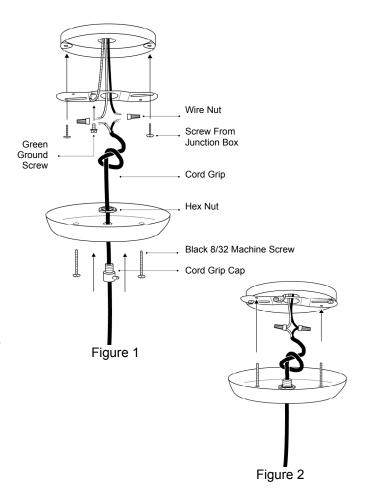

SAFETY INFORMATION

SAFETY

We have designed your lamp to meet the highest UL and CUL safety standards.

WARNING: RISK OF FIRE AND ELECTRIC SHOCK. THIS PRODUCT IS TO BE INSTALLED ONLY BY A QUALIFIED ELECTRICIAN.