



INSTALLATION INSTRUCTIONS



P23065



P23071

INSTALLATION INSTRUCTIONS

THANK YOU FOR CHOOSING KALLISTA

We appreciate your commitment to Kallista quality products. Please take a moment to review this manual before you install your Kallista product. If you encounter any installation or performance problems, please do not hesitate to contact us at the phone number listed at the bottom of the page.

BEFORE YOU BEGIN



CAUTION: Risk of fresh water contamination. This faucet contains important back-siphonage protection. Do not replace the faucet ground joints or remove any components.

- Observe all local plumbing and building codes.
- Shut off the water supplies.
- Carefully inspect waste and supply tubing for any sign of damage and replace if necessary.
- For new installations, assemble the faucet on the sink before installing the sink.
- Except for plumbers putty, do not use petroleum based products on this faucet.
- Before installation, unpack the new faucet and inspect it for damage. Return the faucet to the carton until you are ready to install it.
- Kallista Co. reserves right to make revisions in the design of faucets without notice, as specified in the Price Book.

TOOLS AND MATERIALS




Hex
Wrench



Phillips®
Screwdriver



Adjustable
Wrench




Two 3/8" Male®
Supply Connections



Plumbers
Putty

1. FAUCET INSTALLATION

- Ensure that O-ring is installed in bottom of escutcheon.
- Partially thread the two screws into the threaded ring until the screws barely protrude from the backside of the threaded ring.
- Fit the faucet through the hole in the sink. Position the faucet so the handle faces in the desired position. The recommended handle position is to the user's right.
- Turn the ring so the screws are to the front and back.
- Use a Phillips screwdriver to tighten the screws securely and evenly.

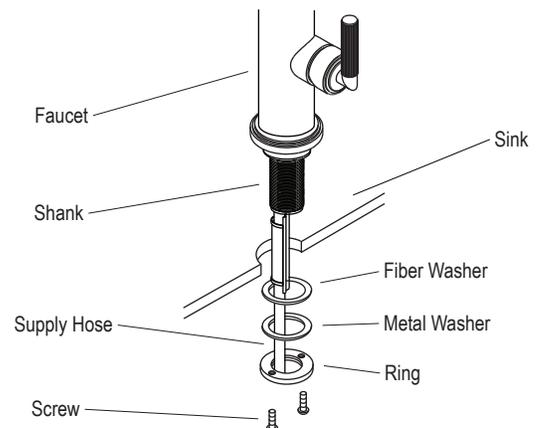

INSTALLATION INSTRUCTIONS

2. SUPPLY INSTALLATION




CAUTION: Risk of restricted water flow and product damage. Use extreme care when bending the supply hoses to avoid kinking and twisting. Hoses must not be taut after installation.

NOTE: If the sink is not installed, install it at this time. Be sure to follow all instructions packed with the sink.

NOTE: If the sink installation requires that you coil the supply hoses to obtain a good connection, maintain an inside coil diameter of at least 3" (7.6 cm).


NOTE: The most common type of faucet installation is with the handle positioned to the right. Pull the handle for cold water or push the handle for hot water. If the handle is installed to the left or centered, reverse the supply tubes; connect the tube for cold water to the hot supply and the tube for hot water to the cold supply. This will maintain the relationship of pulling the handle for cold water or pushing for hot water. If the handle is centered, press it to the right for cold water or to the left for hot water.

- Position the hot and cold water supplies to not interfere with other hoses.
- Connect the supply hoses to the supply stops. Left is hot, right is cold.
- Tighten all connections

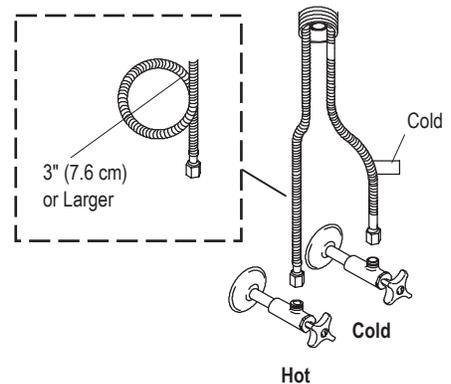

3. FLUSH THE SUPPLY LINES

- Place the valve outlet hose into a bucket or suitable container.
- Turn on the hot and cold supplies.
- Turn the faucet handle to the full cold ON position.
- Let the water run for one minute to remove any debris.
- Rotate the faucet handle to full hot position.
- Let the water run for one minute to remove any debris.
- Turn the faucet handle to the OFF position.

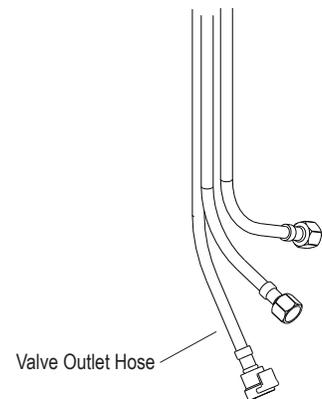

INSTALLATION INSTRUCTIONS**4. CONNECT THE SPRAY HOSE**

- Slide the weight onto the spray hose.
- Verify that the hose ends are clean and that the O-ring is in place.
- Fully engage the hose ends.
- Reposition the supply hoses if necessary.
- Extend and retract the spray hose to check for smooth operation.

