



### INSTALLATION INSTRUCTIONS

P23063, P23064  
P23069, P23073

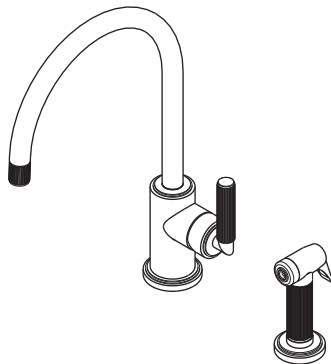

P23063-00, P23064-00

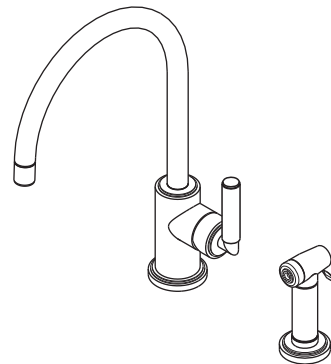

P23069-00, P23073-00

### INSTALLATION INSTRUCTIONS

P23063, P23064  
P23069, P23073

#### THANK YOU FOR CHOOSING KALLISTA


We appreciate your commitment to Kallista quality products. Please take a moment to review this manual before you install your Kallista product. If you encounter any installation or performance problems, please do not hesitate to contact us at the phone number listed at the bottom of the page.

#### BEFORE YOU BEGIN

- ☐ Prior to installation, unpack the Kitchen Faucet and Sidespray (if purchased) and inspect it for damage. If the product is damaged, please contact Kallista immediately at the phone number listed at the bottom of the page.
- ☐ Observe all local plumbing and building codes.
- ☐ Shut off the main water supply.
- ☐ Carefully inspect waste and supply tubing for any sign of damage and replace if necessary.
- ☐ For new installations, assemble the faucet on the sink before installing the sink.
- ☐ Kallista reserves the right to make revisions in the design of plumbing products without notice, as specified in the Price Book.

#### 1. FAUCET INSTALLATION

- ☐ Remove the nut and horseshoe washer from the threaded rod.
- ☐ If your faucet is equipped with the optional sidespray, install the sidespray flex line into the bottom of the faucet as shown.

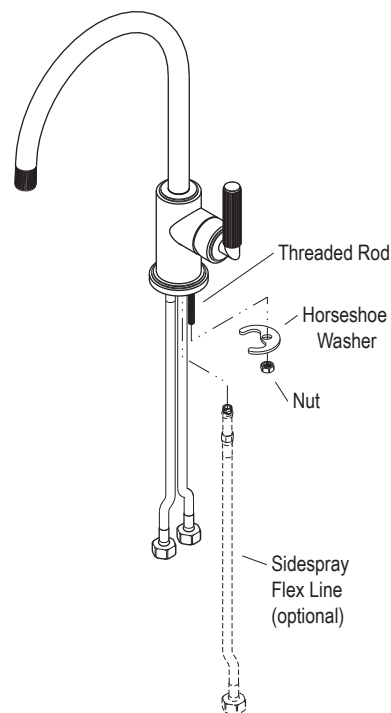


### INSTALLATION INSTRUCTIONS


P23063, P23064  
P23069, P23073

#### 1. FAUCET INSTALLATION (cont'd.)

- ☐ Insert the flex lines through the hole in the sink or mounting surface.
- ☐ If using the spacer, slide it over the flex lines all the way to the bottom of the sink or mounting surface.
- ☐ Reinstall the horseshoe washer and nut onto the threaded rod.

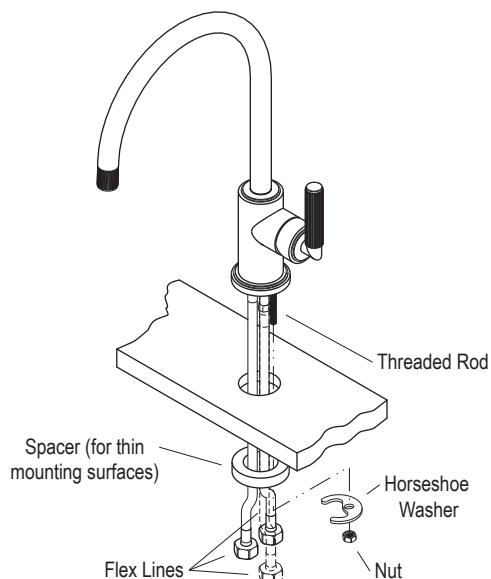

- ☐ **Note:** If the sink is not installed, install it at this time. Be sure to follow all the instructions packed with the sink.
- ☐ Attach the hot and cold flex lines to the appropriate supply tubes.
- ☐ **Note:** If your faucet is not equipped with the optional sidespray, skip step 2 and proceed with step 3.

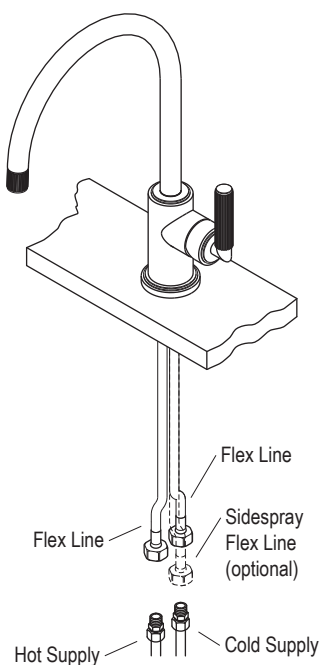


### INSTALLATION INSTRUCTIONS


P23063, P23064  
P23069, P23073

#### 2. OPTIONAL SIDESPRAY INSTALLATION

- ☐ Install the sidespray adapter into the bottom of the faucet as shown.
- ☐ Thread the sidespray flex line onto the side port of the sidespray adapter.

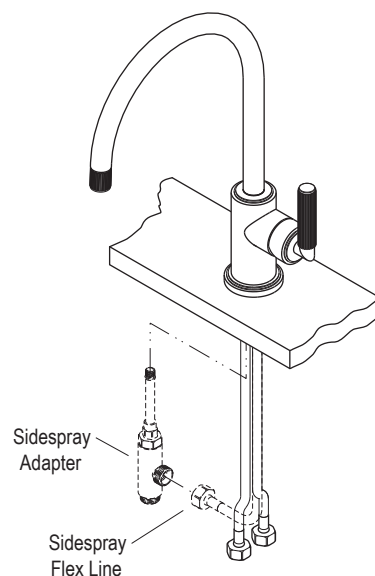

- ☐ Remove the spray guide nut from the spray guide.
- ☐ Insert the spray guide through the spray guide escutcheon, then the hole in the sink or mounting surface.
- ☐ Reinstall the spray guide nut, using the spacer if required.

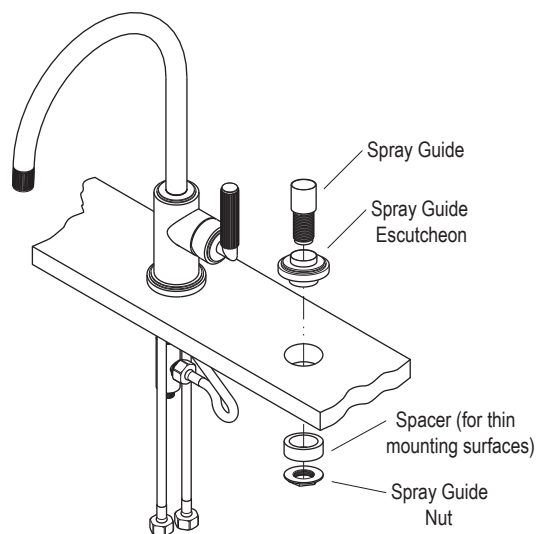


### INSTALLATION INSTRUCTIONS

P23063, P23064  
P23069, P23073

#### 2. OPTIONAL SIDESPRAY INSTALLATION (cont'd.)

- ☐ Insert the sidespray hose end through the spray guide from the top.
- ☐ Thread the end of the sidespray hose onto the port on the bottom of sidespray adapter.

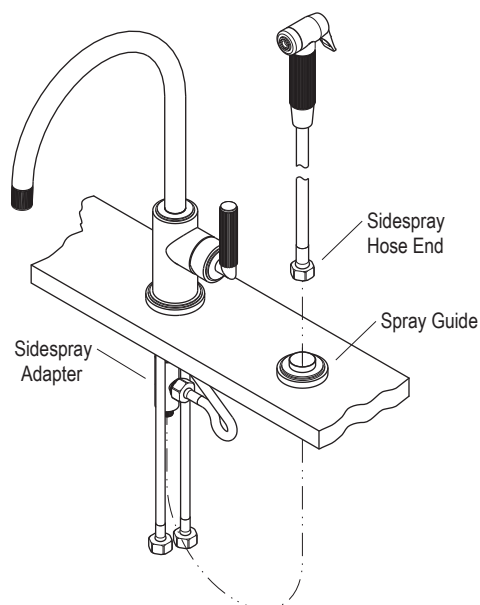

#### 3. COMPLETE INSTALLATION

- ☐ Turn on main water supply. Check for any leaks.
- ☐ Remove the aerator. Turn on the water by tilting the handle to the right.
- ☐ Flush hot then cold water through the faucet for about one minute. Check for any leaks.
- ☐ Turn the water off and replace the aerator.

