KALLISTA.

Town Whirlpool and Bath


FEATURES

- Variable Speed Pump
- 2 HP Motor
- Tub Mounted Electronic Control with Feedback
- Additional Remote Control
- In-Line Water Heater

CODES/STANDARDS APPLICABLE

Specified Model Meets or Exceeds the Following:

P50035-H2 P50035-BA

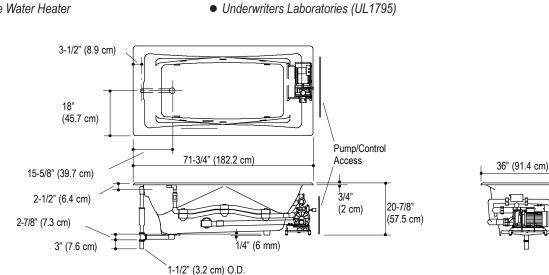

• ASME A112.19.1

• ASME A112.19.7

• IAPMO/UPC

PRODUCT INFORMATION								
Fixture*:	Basin Area	Basin Area		Top Area		Weight		
Bathing Well	· · ·	49" (124.4 cm) x 22" 55.8 cm)		68" (172.7 cm) x 28" (71.7 cm)		460 Lbs. (208.6 Kg)		
	Water Dep	Water Depth		Capacity				
To Overflow	17" (4 3 . 1 c	17" (4 3 . 1 cm)		8 9 Gal. (336.9 Liters)				
*Approximate measurements for comparison only.								
Pump	Heater	Voltage		Frequency		Amperage		
1.5 HP	1.5kW	240V		50/60 Hz		11A		
Cutout Template						1034802-7		

REQUIRED ELECTRICAL SERVICE

Dedicated Circuit Required, Protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Earth-Leakage Circuit-Breaker (ELCB):

Pump / Control

220-240V, 20A, 50/60 Hz

ROUGHING-IN NOTES						
No Change in Measurements if Connected with Drain Illustrated.						
Cut-out	70-1/4" (178.4 cm) x 34-1/2" (87.6 cm)					
Minimum Access Panel:						
Pump / Control	24" (60.9 cm) W x	Required				
	14" (35. 5cm) H					
All Dimensions are Nominal.						
Floor Support Under Whirlpool Must Provide for a Minimum						
of 1800 lbs. (816.4 kg).						
Hot Water Supply Must be 70% of Capacity or Greater.						

SPECIFIED MODEL							
Model	Description	Colors/Finishes					
P50035-H2	Town Whirlpool Bath	0 Stucco White	96 Linen				
P50035-BA	Town Bath	0 Stucco White	96 Linen				
Required Accessory							
P21576-00	Waste and Overflow	CP Polished Chrome AD Nickel Silver	AG Brushed Nickel				
Optional Accessory							
P51002-00	Whirlpool Trim Kit, 6 Jet	CP Polished Chrome AD Nickel Silver	AG Brushed Nickel				

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.