



## Refrigerator column RC 462/RC 472

- Fully integrated appliances. Doors open to a 115-degree angle, so that the large drawers can be pulled out completely.
- Temperature control drawer (32°F to 37°F) for the storage of delicate food, such as fish, meat or vegetables.
- Motorized glass shelf continuously variable, even when fully loaded. For highest volume efficiency.

Niche height 84".  
Net volume 13.1/17.1 cu.ft.

### Technical features

Electronic precision temperature control with digital temperature display.  
Dynamic cool air distribution with Multi-Flow Air System.  
Activated charcoal filter.  
Energy-saving vacation mode.  
Open-door and malfunction warning system.

### Cooling compartment

Net volume 13.1/17.1 cu.ft.  
No-frost technology with fast cooling.  
Temperature adjustable from 35° to 46°F.  
Four safety glass shelves, three of which are adjustable (one motorized, two manually).  
Two fully extendable drawers (low and high) with transparent front. One continuous, fully extendable drawer with transparent front.  
Two fully extendable drawers with transparent front.  
Bright interior lighting with two ceiling spotlights and two halogen light pillars on the side.  
Solid aluminum door bins.  
One large gallon door bin.  
Two height-adjustable door bins.  
One bin with front flap.

### Temperature control drawer

Net volume: 2/2.6 cu.ft.  
Separate automatic temperature control with settings for poultry, fish, meat and produce.  
A large, fully-extendable drawer with transparent front and integrated lighting.

### Planning notes

Flat hinge.  
Door hinges on the right from factory, but reversible if necessary.  
Plan the power outlet behind the appliance per installation instruction.  
(Requires custom toe kick)

### Rating

Total rating: 1.8 kW.  
Connecting cable length 78".  
Total Amps: 15  
120V/60Hz

### Total rating

RC 462: 0.27 kW  
RC472: 0.31 kW  
Energy consumption  
0.40/0.44 kWh/24 hrs.

### RC 462 700

Fully integrated  
Width 24"

### RC 472 700


Fully integrated  
Width 30"

### Installation accessories

RA 460 000  
Installation kit for side-by-side installation (for connecting any two columns)  
RA 460 010  
Heating kit if columns are not attached and less than 6" apart  
RA 460 020  
Connecting element for vertically split appliance fronts (for a flush front)  
RA 460 040  
Finger protection for extra long furniture fronts

### Optional accessories

RA 035 030  
Aluminum bottle cooler  
RA 421 610  
Stainless steel door panel with handles for RC 462  
Panel thickness 3/4".  
RA 421 630  
Aluminum door panel with handles for RC 462  
Panel thickness 3/4".  
RA 421 710  
Stainless steel door panel with handles for RC 472  
Panel thickness 3/4".  
RA 421 730  
Aluminum door panel with handles for RC 472  
Panel thickness 3/4".  
RA 461 612  
Ventilation grill  
Stainless steel, for RC 462 right-hinged  
RA 461 613  
Ventilation grill  
Stainless steel, for RC 462 left-hinged  
RA 461 712  
Ventilation grill  
Stainless steel, for RC 472 right-hinged  
RA 461 713  
Ventilation grill  
Stainless steel, for RC 472 left-hinged

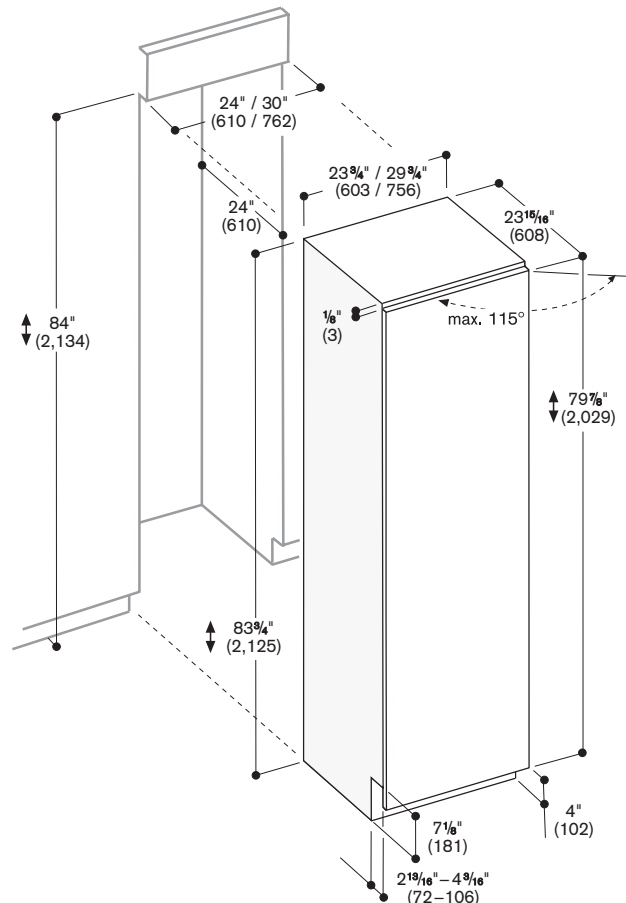

Numbers indicated  
inside parenthesis ( ) = mm

