

semi-recessed
mondana



Design: Hartmut S. Engel and RZB
Patent Pending

features

Decorative semi-recessed luminaire with round opal diffuser, may be mounted in ceiling or wall.


Available in 22", 17" and 11" diameters. All luminaires are ADA compliant.

Clear silicone o-ring seal keeps bugs and dust out of diffuser to ensure shadow free illumination. Housings designed for both IC and non-IC rated ceilings.

Optical cavity creates uniform halo of light around housing providing a distinct visual presence.




Mondana is ideally suited for corporate, hospitality or medical applications that require a luminaire with a contemporary design and clean visual appearance.

companion luminaires

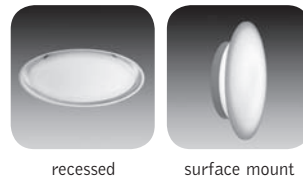

recessed


surface mount

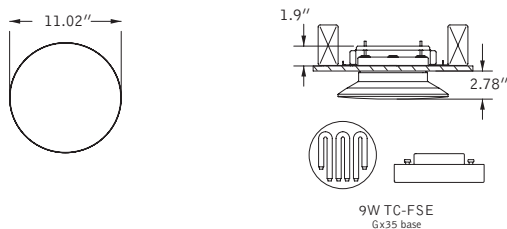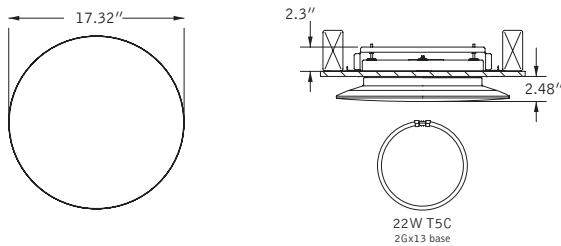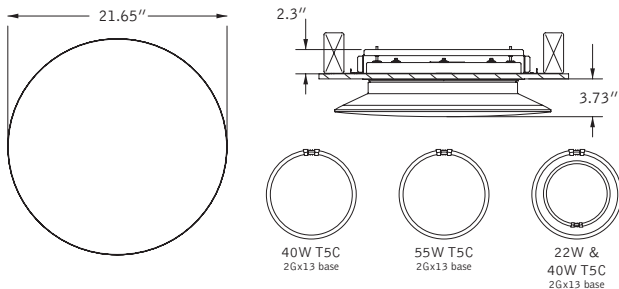

visit www.us.megaman.cc for additional lamp information.

performance

1-Lamp 55W T5-C
54% Efficiency
527 cd @ 0°

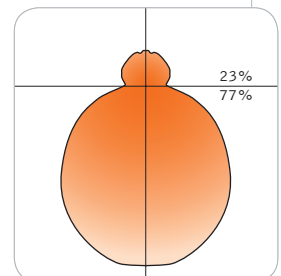


Visit focalpointlights.com for complete photometric data.

fixture:


project:

mounting information

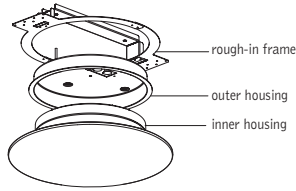

Tile cut-out dimensions

Drywall framing dimensions

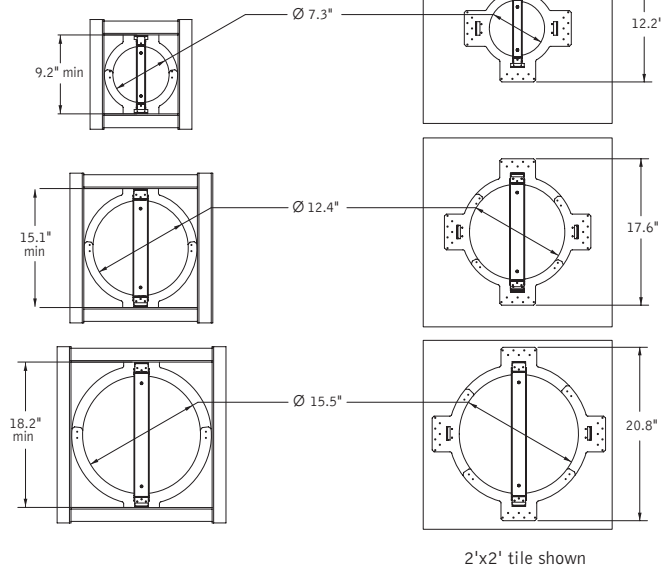

specifications

construction

Molded plastic inner housing.
One-piece 18 Ga. spun steel outer housing.
Lamps are shielded by opal white, screw-on molded plastic diffuser with clear silicone o-ring seal.
Lamp and ballast are mounted to 20 Ga. reflector.
All luminaires are provided with 18 Ga. galvanized steel rough-in frame.


22" Dia. Weight: 15 lbs
17" Dia. Weight: 12 lbs
11" Dia. Weight: 5 lbs

optic

One-piece 20 Ga. steel reflectors finished in Matte Satin White powder coat.

electrical

Electronic ballasts are thermally protected and have a Class "P" rating.
UL and cUL listed for insulated and non insulated ceiling types.
Requires 1/2" trade size conduit with lock nut style connector, snap-in connectors are not compatible.



finish

Plastic inner housing molded in matte white finish. Outer steel housing finished in Matte Satin White.

ordering

luminaire series FMN
Mondana FMN

mounting SR
Semi-Recessed SR

nominal size _____
22" diameter (ADA compliant) 22
17" diameter (ADA compliant) 17
11" diameter (ADA compliant) 11

lamping _____
22" Diameter
One Lamp 40W T5 Circular FC40
One Lamp 55W T5 Circular FC55
(1) 22W & (1) 40W T5 Circular FC2240

17" Diameter
One Lamp 22W T5 Circular FC22

11" Diameter
One Lamp 9W TC-FSE TC9
(Lamp is provided - 120V only)

voltage _____
120 Volt 120
277 Volt 277
(not available on TC9)
347 Volt 347
(not available on TC9)

ballast _____
Self Ballasted NPF <28% THD B
(TC9 only)
Electronic Program Start <10% THD S
(not available on TC9)

factory options _____
Fusing FU
(not available on TC9)
Include 3000K Lamp L830
Include 3500K Lamp L835
Include 4000K Lamp L840
(TC9 only)
Include 4100K Lamp L841
(T5 circular only)

finish WH
Matte White Housing WH