



## OUTDOOR—REFRIGERATION

### Undercounter/Freestanding 24"W. Refrigerated Drawer



## Standard Features & Accessories

### All models include

- Agency-certified for outdoor use
  - A stainless steel exterior cabinet surrounds the unit and forms a water-resistant seal
  - Insulated electrical terminals, sealed electrical contacts, and a water-resistant thermostat provide optimal performance in all weather elements
- Normal operating range between 110°F (43.4°C) and 40°F (4.4°C)  
(Viking recommends that units be shut off in temperatures outside these limits)
- Capacity—5.8 cu. ft. (164.1 L)
- Temperature adjusts from 33 – 45°F
- Full-extension drawer glides
- Vertical storage of wine bottles or two-liter drink bottles in bottom drawer
- Hidden touchpad control with LED digital temperature readout
- Automatic cycle defrost
- Interior LED lighting
- Install as undercounter or freestanding unit

## Model Options



**VURD1441T**  
**Professional**

#### FINISH DETAILS FOR VURD MODEL

- Solid door—Stainless Steel (SS)





# OUTDOOR—REFRIGERATION

## Undercounter/Freestanding 24"W. Refrigerated Drawer




★ Please see  
Installation Notes &  
Accessories  
for important  
information,  
including pan sets  
and dividers.

### Dimensions & Specifications

#### PRODUCT DIMENSIONS



VURD1441T  
Professional

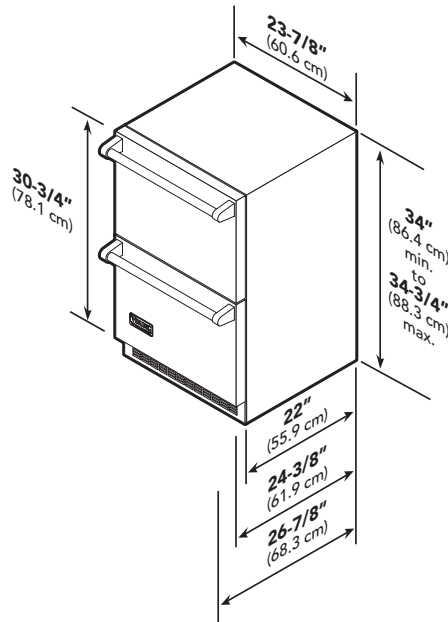

#### PROFESSIONAL

VURD1441T	
Overall width	23-7/8" (60.6 cm)
Overall height	34" (86.4 cm) min. to 34-3/4" (88.3 cm) max.
Overall depth (from rear)	
To front edge of lower vent	22" (55.9 cm)
To front edge of door	24-3/8" (61.9 cm)
To front edge of handle	26-7/8" (68.3 cm)
With drawer fully extended	47-1/4" (120.0 cm)
Approx. ship wt.	180 lbs. (81.8 kg)





## OUTDOOR—REFRIGERATION

Undercounter/Freestanding  
24"W. Refrigerated Drawer




### Dimensions & Specifications

#### DRAWER EXTENSION



VURD1441T  
Professional

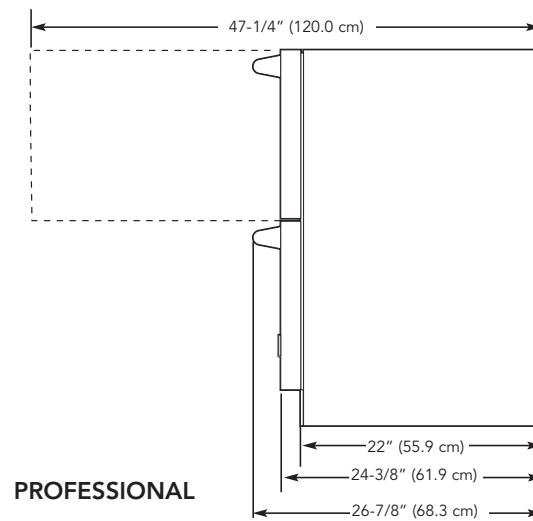



## OUTDOOR—REFRIGERATION

### Undercounter/Freestanding 24"W. Refrigerated Drawer



#### UTILITY REQUIREMENTS



##### GAS

Not applicable



##### ELECTRICAL

- Three-wire cord with grounded three-prong plug attached to product
- 115 VAC/60 Hz; 15 amp dedicated circuit
- Maximum amp usage—3.3



##### PLUMBING


Not applicable

## Installation Requirements

### ACCESS REQUIREMENTS



VURD1441T  
Professional

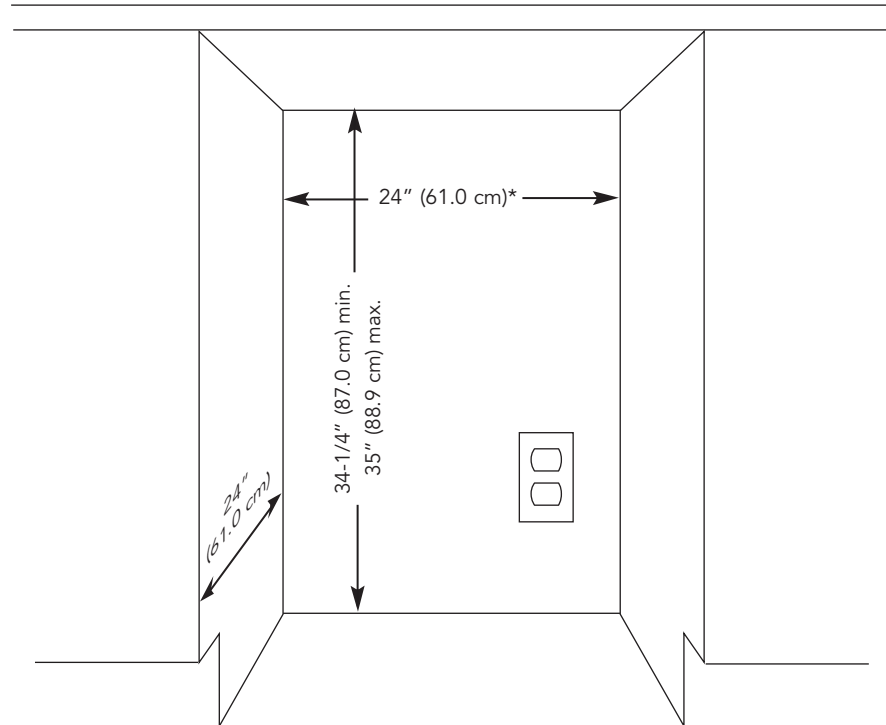

\*Optional: Cutout for electrical outlet can be placed in adjacent cabinetry.

#### VURD1441T

Cutout width	24" (61.0 cm)*
Cutout height	34-1/4" (87.0 cm) min. to 35" (88.9 cm) max.
Cutout depth	24" (61.0 cm)





## OUTDOOR—REFRIGERATION

### Undercounter/Freestanding 24"W. Refrigerated Drawer



## ★ Installation Notes & Accessories

### Pan Set

- Stainless Steel (SS)
- Four commercial restaurant-style pans with clear lids
  - Two 6"D. x 6-15/16"L. x 6-3/8"W.—2.3 qt. (2.2 lit.) capacity
  - One 6"D. x 12-13/16"L. x 6-15/16"W.—5.8 qt. (5.5 lit.) capacity
  - One 8"D. x 12-13/16"L. x 10-7/16"W.—11.6 qt. (11.0 lit.) capacity
- Stainless Steel (SS) pan support rail

Model	Description	Approx. ship wt. lbs. (kg)
RDPS	Pan set	12 (5.4)

### Compliance Information



### WARRANTY SUMMARY\*

- Two-year full warranty—complete unit
- Six-year full warranty—sealed refrigeration system
- Twelve-year limited warranty—sealed refrigeration system
- Ninety-day limited—cosmetic parts such as glass, painted, and decorative items

\*For complete warranty, see *Use & Care Guide*. Warranty valid on Viking products shipped within the United States and Canada.

