


Shelton, Mindel & Associates design



See also:

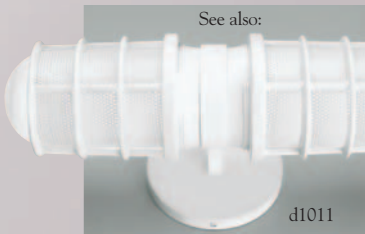

d1011




d5010



d8010

Shelton, Mindel & Associates
design

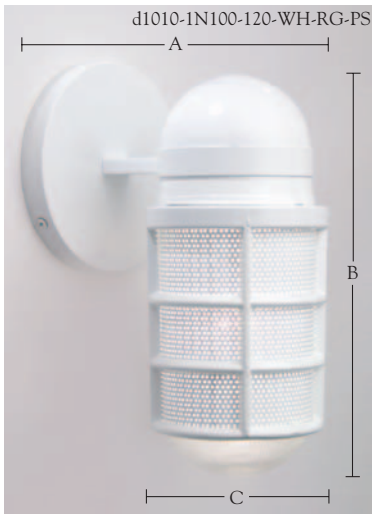

	A	B	C
d1010:	6 1/4"	9 1/4"	4 1/4"
d1016:	8"	11 3/4"	5 1/2"

Item #	Lamping	Voltage	Fixture Finish	Options	Sp. Orders
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Work space for submittals

How to specify

Example from illustration at left

d1010	-1N100	-120	-WH	-RG-PS	<input type="text"/>
--------------	---------------	-------------	------------	---------------	----------------------

Item Number	d1010	SOFT INDUSTRIAL wall fixture
	d1016	SOFT INDUSTRIAL wall fixture - Large
Construction	Cast aluminum grill and fittings. Clear glass enclosure. 5" diam. x 1/2" deep canopy. (Fluorescent versions enclose ballast in 5" diam. x 2" deep canopy.) For standard wall junction box mounting. UL listed, cUL certified for dry locations.	

Lamping / Wattage	1N100	Incandescent, one 100 W, medium base, A type
<i>Fixtures supplied less lamps. Lamps may be ordered from d'ac.</i>	1N200*	Incandescent, one 200 W, medium base, A type
	1FM13	Fluorescent, one 13 W quad, 2 pin, electromagnetic NPF ballast
	1F13	Fluorescent, one 13 W quad, 4 pin, electronic HPF ballast
	1F18	Fluorescent, one 18 W quad, 4 pin, electronic HPF ballast
	1F26	Fluorescent, one 26 W triple tube, 4 pin, electronic HPF ballast
	1F32	Fluorescent, one 32 W triple tube, 4 pin, electronic HPF ballast
	1F42*	Fluorescent, one 42 W triple tube, 4 pin, electronic HPF ballast
	1M70*	Metal Halide†, one 70 W, medium base, ED-17 type
	1M100*	Metal Halide†, one 100 W, medium base, ED-17 type
	1M150*	Metal Halide†, one 150 W, medium base, ED-17 type
		<i>*Available on d1016 only</i>
		†remote "F-can" magnetic type metal halide ballast not to exceed 10 feet from lamp

Voltage	120	120V	277	277V
----------------	------------	------	------------	------

Fixture Finishes	AL Brushed Aluminum		
<i>See Page d9000 for color renderings</i>	Baked Enamel Finishes:		
	WH White Gloss	G1 Light Grey	G2 Medium Grey
	MG Metallic Grey	AN Metallic Anthracite	BG Black Gloss
	MB Matte Black	BC Black Crinkle	CU Metallic Copper
	BZ Metallic Bronze	T1 Light Tan	T2 Medium Tan
	GM Metallic Green	SF Seafoam	BL Metallic Blue
	RD Metallic Red	RB Bright Red	MP Magenta Pink
	YL Bright Yellow	SCF Special Finish—must supply paint chip	

Options	RG Ribbed Glass enclosure	PS Perforated metal Sleeve
	WET Wet location UL/cUL listed	
	SCF Special/Custom Finish - customer must supply paint chip	
	ELTRN Remote electronic metal halide ballast, 120 V (70 W & 100 W only)	
	Not to exceed 12 feet from lamp	

Special Orders	For modifications to dimensions, electrical requirements and other special orders, please contact your d'ac representative.
-----------------------	---