

Shelton, Mindel & Associates design



d5010

See also:



d8010




d1010

d5010-1N100-120-WH-RG

Shelton, Mindel & Associates  
design

34" overall height

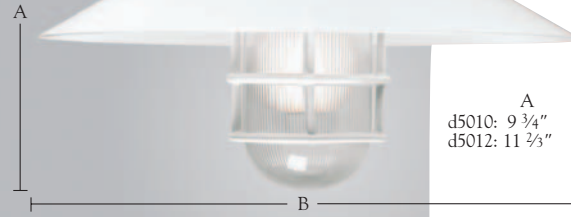

A B  
d5010: 9 3/4" 14"  
d5012: 11 2/5" 17"

Item #	Lamping	Voltage	Fixture Finish	Options	Sp. Orders
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Work space for submittals

**How to specify**

Example from illustration at left

d5010	-1N100	-120	-WH	-RG	<input type="text"/>
-------	--------	------	-----	-----	----------------------

**Item Number**

d5010  
d5012

SOFT INDUSTRIAL pendant  
SOFT INDUSTRIAL pendant - Large

**Construction**

Cast aluminum grill and fittings. Clear glass enclosure.  
5" diam. x 1/2" deep canopy (fluorescent versions enclose ballast in 5" diam. x 2" deep canopy).  
For standard ceiling junction box mounting.  
UL listed, cUL certified for dry locations.

**Lamping / Wattage**

Fixtures supplied less lamps.  
Lamps may be ordered from d'ac.

1N100  
1N200\*  
1FM13  
1F13  
1F18  
1F26  
1F32  
1F42\*  
1M70\*  
1M100\*  
1M150\*

Incandescent, one 100 W, medium base, A type  
Incandescent, one 200 W, medium base, A type  
Fluorescent, one 13 W quad, 2 pin, electromagnetic NPF ballast  
Fluorescent, one 13 W quad, 4 pin, electronic HPF ballast  
Fluorescent, one 18 W quad, 4 pin, electronic HPF ballast  
Fluorescent, one 26 W triple tube, 4 pin, electronic HPF ballast  
Fluorescent, one 32 W triple tube, 4 pin, electronic HPF ballast  
Fluorescent, one 42 W triple tube, 4 pin, electronic HPF ballast  
Metal Halide†, one 70 W, medium base, ED-17 type  
Metal Halide†, one 100 W, medium base, ED-17 type  
Metal Halide†, one 150 W, medium base, ED-17 type

\*Available on d5012 only

†remote "F-can" magnetic type metal halide ballast not to exceed 10 feet from lamp

**Voltage**

120    120V    277    277V

**Fixture Finishes**

See Page d9000 for color renderings

<b>AL</b> Brushed Aluminum	<b>Baked Enamel Finishes:</b>
<b>WH</b> White Gloss	<b>G1</b> Light Grey
<b>MG</b> Metallic Grey	<b>AN</b> Metallic Anthracite
<b>MB</b> Matte Black	<b>BC</b> Black Crinkle
<b>BZ</b> Metallic Bronze	<b>T1</b> Light Tan
<b>GM</b> Metallic Green	<b>SF</b> Seafoam
<b>RD</b> Metallic Red	<b>RB</b> Bright Red
<b>YL</b> Bright Yellow	<b>SCF</b> Special Finish—must supply paint chip
	<b>G2</b> Medium Grey
	<b>BG</b> Black Gloss
	<b>CU</b> Metallic Copper
	<b>T2</b> Medium Tan
	<b>BL</b> Metallic Blue
	<b>MP</b> Magenta Pink

**Options**

**RG** Ribbed Glass enclosure    **PS** Perforated metal Sleeve  
**WET** Wet location UL/cUL listed    **CEQ** California Earthquake Swivel  
**SCF** Special/Custom Finish - customer must supply paint chip  
**ELTRN** Remote electronic metal halide ballast, 120 V (70 W & 100 W only)  
Not to exceed 12 feet from lamp

**Special Orders**

For modifications to dimensions, electrical requirements and other special orders, please contact your d'ac representative.