



## QD98530 Commercial Recessed QL® Housing, Trim and Lamp Installation Instructions

**CAUTION:** To avoid possible electric shock, be sure that power supply is turned off before installing or servicing this fixture.

**Note:** This fixture should be supported by main runners or other structure that is capable of supporting fixture weight of 35 lbs.

### Ceiling Grid Installation (Fig. 1)

- Step 1** Fixture is shipped in position to be installed centered into a 2x2 or 2x4 ceiling grid system.
- Step 2** Extend inner hanger bar to the grid indication mark and tighten the (2) screws. Fixture is now ready for grid installation.
- Step 3** Secure to grid with locking screws at the ends of the hanger bars.
- Step 4** Using wingnut (vertical adjustment), adjust plaster ground until it is flush with finished ceiling line.

### Trim and Lamp Installation (Fig. 2)

- Step 1** Install reflector by pulling down coil springs and engaging in holes of reflector.
- Step 2** Install lamp by pushing straight up until lamp snaps into place.

### To Remove Lamp

- Step 1** Grasp globe and turn counter-clockwise while pulling down.

### To Clean Trims

- Step 1** Gently wipe with a soft, clean, dry lint-free cloth to remove dust.
- Step 2** Wipe with a mild detergent solution on a soft, clean cloth to remove fingerprints and stains.
- Step 3** Rinse with clean, soft water and dry with lint-free cloth.

Fig.1

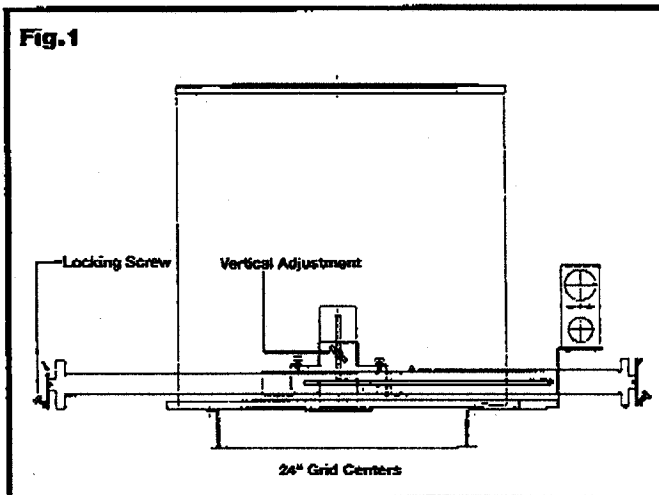


Fig.2

