

Koroseal Wall Protection Systems



Korogard® Door Lever & Knob Protectors



KOROGARD Door Lever and Knob Protectors dramatically cut maintenance costs on expensive door levers and knobs. **KOROGARD**'s unique thermoforming capabilities provide rugged protection that ends costly maintenance and replacement. With a variety of standard products, Door Lever and Knob Protectors can protect virtually all doors. Standard thickness is .125" (3.18mm).

KOROGARD Door Lever and Knob Protectors are backed by a limited five-year warranty. All are formed with an acrylic/PVC base with excellent cleanability and impact resistance. All **KOROGARD** protective products color-coordinate with a multitude of **KOROSEAL**® Wallcoverings for a systems approach to wall protection.

For more information on **KOROGARD** Door Lever and Knob Protectors or the **KOROSEAL** Wall Protection System, please call your local **KOROGARD** distributor or 800-628-0449.

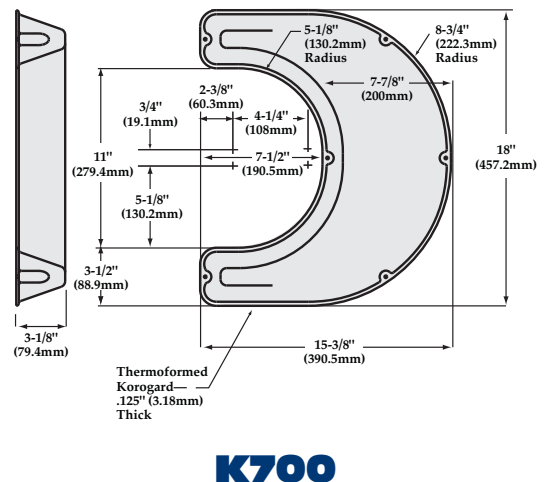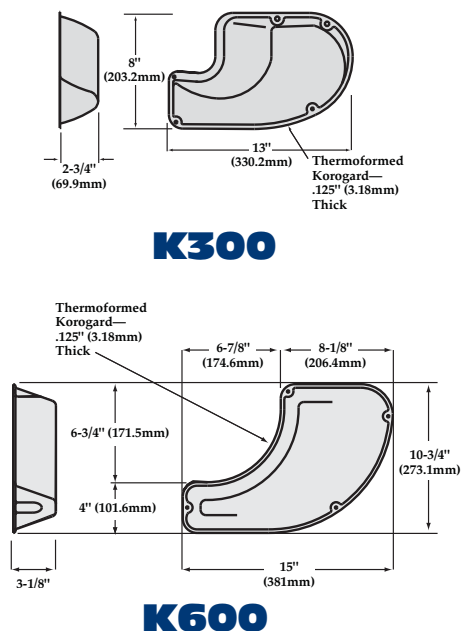

Product Guide Specification

SECTION 10 26 00 WALL AND DOOR PROTECTION

PART 1 GENERAL

1.01 SECTION INCLUDES

Door Lever and Knob Protectors.

1.02 SUBMITTALS

- A. Comply with requirements of Section 01 33 00—Submittals.
- B. Product Data: Submit manufacturer's product data.
- C. Samples: Submit sample of each model and color to be installed for Architect's approval.

1.03 DELIVERY, STORAGE, AND HANDLING

- A. Delivery: Deliver materials to site in manufacturer's original, unopened containers and packaging with labels clearly indicating manufacturer and material.
- B. Storage: Store materials indoors in a clean, dry area protected from damage and in accordance with manufacturer's instructions.
- C. Handling: Protect materials during handling and installation to prevent damage.

PART 2 PRODUCTS

2.01 MANUFACTURER

Koroseal Wall Protection Systems,
A Division of RJF International Corporation.

2.02 WALL AND DOOR PROTECTION

Koroseal "Korogard" Door Lever/Knob Protector:
Rigid high-impact acrylic/polyvinyl chloride (PVC)
thermoformed protectors.

- 1. Model: [K100] [K200] [K300] [K350] [K400]
[K500] [K600] [K650] [K700].
- 2. Thickness: 0.125" (3.18mm).
- 3. Color: Color to be selected by Architect from manufacturer's standard colors.

PART 3 EXECUTION

3.01 EXAMINATION

Inspect door surface and lever/knob to receive Lever/Knob Protector. Notify the Architect in writing if conditions are not acceptable. Do not begin installation until unacceptable conditions have been corrected.

3.02 INSTALLATION

- A. Install door Lever/Knob Protector with appropriate quantity and type of threaded fasteners.
- B. Install door Lever/Knob Protector at proper location/orientation to door lever/knob.



KOROGARD®
WALL PROTECTION SYSTEMS

800-628-0449 • www.korogard.com • Division 10 26 00