
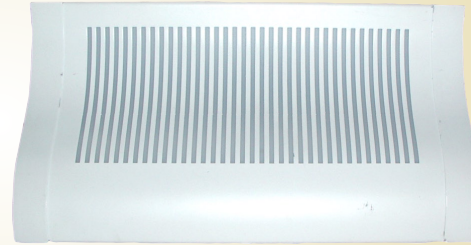


# G4 SCONCE

# G4 SCO

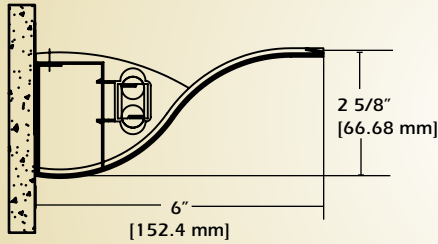

**TYPE** \_\_\_\_\_

**FEATURES**

The G4 Sconce presents a unique shallow winged profile and is one variation of a complete family of wall mounted linear fluorescent luminaires. Constructed of perforated steel and aluminum extrusions it has a unique reveal feature. The G4 Sconce can be furnished with a wide variety of lamps and perforated accent patterns.

**SPECIFICATIONS**

**Housing:** One piece die formed 20-gauge cold rolled steel welded construction forming a 2 5/8" x 6" shallow winged profile. Rectangular pattern is 1 15/16" x 1/8" straight with white acrylic .020 translucent overlay as shown above. All Generation shieldings available. (See Chart) The decorative end caps are an added aesthetic feature to the sconce. Finished end caps are laser cut aluminum with no exposed hard ware.

**Reflector:** Die formed 20-gauge cold rolled steel minimum 90% reflectivity finished in high gloss baked white enamel.

**Electrical:** Ballast is electronic, high power factor, thermally protected class P, sound rated A, with less than 20% total harmonic distortion. The minimum number of ballasts will be used unless otherwise specified.

**Mounting:** Standard installation is key slots 6" O.C. for ease of installation.

**Finish:** Fixture housing and steel components are finished in baked white enamel applied over a five-stage pretreatment process.

**Lamps:** Fixture is provided with the use of one lamp in T5, and compact fluorescent. (Supplied by others).

**Certification:** Luminaires are U. L. Listed, C. S. A. certified and are Union Made in the United States of America I. B. E. W.

**ORDERING GUIDE**

MODEL NO.	DIRECTION	SHIELDING	LAMPS	MOUNTING	LENGTH	FINISH	VOLTAGE	OPTIONS
<b>G4 SCO</b>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>G4 SCO</b>	<b>DI=</b> Direct/ Indirect	<b>Perforations</b> See Shielding Chart	<b>9W CF</b> <b>13W CF</b> <b>18W CF</b> <b>39W CF</b> <b>40W CF</b> <b>14W T5</b> <b>24W T5HO</b>	<b>WM=</b> Wall Mounted	<b>1=</b> Ft <b>2=</b> Ft	<b>W=</b> White <b>CC=</b> Custom Color	<b>120v</b> <b>277v</b>	<b>See</b> <b>Options</b> <b>Below</b>

Example: **G4 SCO-DI-7-18W-CF-WM-1'-W-120**  
 Generation four sconce with perforation pattern 7, rectangle slotted continuous pattern with opal overlay for one 18 watt compact fluorescent lamp, wall mounted one foot fixture finished in baked white enamel with 120 volt electronic ballast less than 20% total harmonic distortion.

**OPTIONS**

- E10 =** Electronic ballast, high power factor, thermally protected class P, sound rated A <10% total harmonic distortion
- EMC =** Emergency Circuit
- DCS =** Dust Cover