



## ēno® one

fixed wall mount interactive classroom solution

### Features

- **Flexibility**—Save valuable lesson time by controlling and interacting with ēno, the projector and peripherals in one place: at the board. Teachers are always ready to demonstrate key concepts from the front of the classroom.
- **More time for lessons**—Integration of ēno one's multi-user, multi-media and multi-functional features enable quick lesson reference and seamless instruction. A fun learning environment is guaranteed for all!
- **Uncomplicated training**—With just one solution to learn, teachers use dedicated buttons to manipulate the board and projector and seamlessly teach with the software they have always known and loved, maximizing valuable classroom time.
- **Maximized budgets**—Purchasing and support from one company, coupled with simple installation, reduces time and costs for schools and districts seeking to get the most from their interactive technology implementation.
- **Cleaner and greener classrooms**—The ēno board is environmentally certified, recyclable and made with PolyVision's virtually indestructible *e³ environmental ceramicsteel™* surface. So, choosing the ēno one interactive classroom solution helps conserve natural resources and ensures clean air in the classroom—protecting our earth and children for generations.

### One solution... absolute simplicity

The comprehensive ēno one fixed wall mount provides an efficient solution for years of interactivity in the classroom. From drywall to concrete, ēno one installs on any type of wall. The unobtrusive ultra-short throw projector minimizes shadows and glare. And, the dedicated projector icon strip gives the teacher more control—right at the board. With unsurpassed durability and teacher conveniences, ēno one will bring inspiration to the classroom year after year.

“With all ēno one controls at the board, I can quickly make adjustments and dive into lessons without missing a beat.”

## ēno one fixed wall mount specifications

### Interactive whiteboard

- Includes ēno 2610, ēno 2810, ēno click 2650 or ēno click 2850
- Environmentally certified: MBDC Cradle-to-Cradle<sup>SM</sup> Silver and SCS Indoor Advantage Gold<sup>®</sup>
- Warranty: Forever Warranty<sup>™</sup> on the surface; 10 years on construction (including trim and mounting brackets); 2 years on stylus and Bluetooth<sup>®</sup> receiver
- Shipping specs for ēno 2610: 71" x 54" x 5"; 69 lbs.
- Shipping specs for ēno 2810: 91" x 54" x 5"; 94 lbs.
- Shipping specs for ēno click 2650: 71" x 54" x 5"; 50 lbs.
- Shipping specs for ēno click 2850: 91" x 54" x 5"; 67 lbs.


### Fixed wall mount unit

- Projector boom assembly
- Installs on stud/drywall, wood, brick, cinderblock or concrete wall
- Internal cable storage
- Paper template included
- Finish: Dark gray powdercoat
- Warranty: 5 years

### PolyVision PJ920 ultra-short throw projector

(PJ905 short throw projector is also available. See separate specifications.)

- DLP with Brilliant Color technology
- Native resolution: WXGA (1280 x 800)
- Aspect ratio: 16:10 Native, 4:3
- Brightness: 2500 Lumens (typical); 2200 Lumens (eco mode)
- Lamp life: 4000/6000 hrs.
- 6-segment color wheel (RGBCWY)
- Contrast ratio: 1500:1
- Throw Ratio: 0.192
- Keystone correction: ±15°
- 10 watt built-in speaker
- 3D-ready
- I/O connections: VGA (x2), HDMI, S-Video, Composite Video RCA, Audio mini jack (in and out loop), VGA Monitor Out
- Control terminals: LAN Ethernet RJ45, USB, Serial RS-232
- Networks: IP for remote management
- Compatibility for video system: NTSC/NTSC 4.43, PAL-B/G/H/I, SECAM
- Compatibility for video interface: Composite, S-Video, Component YPbPr, Component YCbCr, VESA Standard
- Format compatibility: QVGA, VGA, SVGA, XGA, SXGA+, UXGA
- Acoustic noise: 29dB (typical 230 W); 27 dB (typical eco mode 190 W)
- Weight: <20 lbs. (<9 kg)
- Lamp replacement accessible when mounted
- Warranty: 3 years on projector; 3 years on lamp
- Kensington theft protection
- Power cord: 4.5m
- VGA cable: 4.5m
- USB cable: 4.5m
- Power requirements: 100V-240V, 50 / 60 Hz
- Power consumption: 290 W (normal use); 240 W (eco mode); <1 W (standby)
- Temperature: 5°C ~ 40°C; -10°C ~ 60°C (non-operating)
- Operating altitude: sea level to 10,000' at 23°C
- Humidity: 10% - 85% (no condensation); 5% - 95% (no condensation, non-operating)

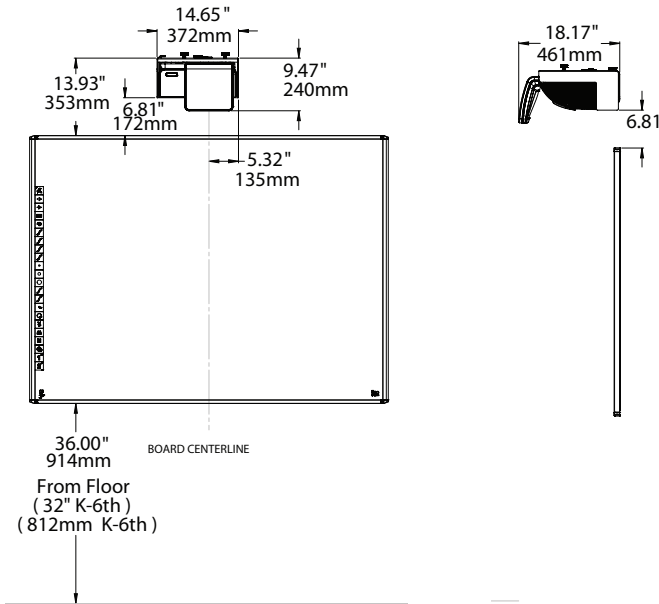

SKU	Interactive whiteboard	Projector	Mount
ēno one 2610 FWA UST	ēno classic 2610	PJ920	Fixed wall arm
ēno one 2810 FWA UST	ēno classic 2810	PJ920	Fixed wall arm
ēno one 2650 FWA UST	ēno click 2650	PJ920	Fixed wall arm
ēno one 2850 FWA UST	ēno click 2850	PJ920	Fixed wall arm



eVision<sup>™</sup> PolyVision is committed to move toward sustainability in all areas of environmental stewardship—to protect people, replenish natural resources, and restore the communities in which we work and live.

©2011 PolyVision Corporation. All rights reserved. Trademarks used herein are the property of PolyVision Corporation or of their respective owners. PolyVision Corporation reserves the right to make changes in product design, construction or detail, and to discontinue any product or material without notice.

102611