

KALIFA

DESIGN ERNESTO GISMONDI

Artemide[®]
ARCHITECTURAL




KALIFA SYSTEM



- cable suspended system of single and joining luminaire modules providing indirect and direct lighting using 2 x 28W, 2 x 35W, or 2 x 54W T5 fluorescent lamps, high efficiency reflectors and anti-glare grilles ensure maximum efficacy and visual comfort
- body in extruded aluminum with white or grey painted finish
- lower diffuser in $\frac{1}{2}$ " thick silk screened opaque tempered glass
- direct anti-glare reflectors in specular aluminum
- dust cover in polycarbonate
- light distribution: 39% indirect and 61% direct
- modules available in two sizes: 48 $\frac{1}{16}$ " and 60 $\frac{1}{16}$ " lengths
- modules join in continuous linear installation runs, without connectors required, or 90° connectors join modules for "L" configurations
- support cables in stainless steel supplied with grip-lock connectors for quick height adjustment at installation
- ceiling feeder canopy in steel and thermoplastic, mounting to standard electrical junction boxes
- ceiling non-feeder canopy in steel and thermoplastic, mounting directly to rigid ceiling surface (hardware not supplied)
- equipped with thermally protected, class P, high power factor 120V electronic fluorescent ballast
- for 277/347V electronic fluorescent ballast, dimmable electronic ballast, and emergency lighting options, please consult your Artemide Sales Representative


KALIFA SUSPENSION SYSTEM DIRECT AND INDIRECT FLUORESCENT

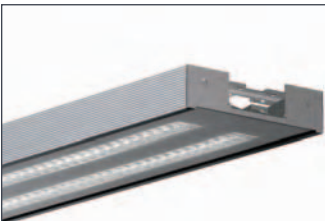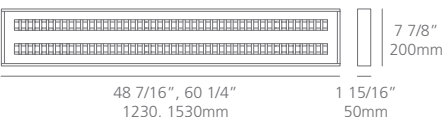


	 48 7/16", 60 1/4" 1230, 1530mm 1 15/16" 50mm 7 7/8" 200mm	 T5 / G5 Cd/Klm																
x= ☐ white 2 ☒ grey 9																		
	<table><tr><th>CODE</th><th>DESCRIPTION</th><th>LENGTH</th><th>WEIGHT</th></tr><tr><td>M1655x8</td><td>Kalifa 48 suspension 2 x 28W FLU/EB</td><td>48 7/16" / 1230mm</td><td>14.5 lbs. / 6.60kg</td></tr><tr><td>M1655x8H</td><td>Kalifa 48 suspension 2 x 54W FLU/EB HO</td><td>48 7/16" / 1230mm</td><td>14.5 lbs. / 6.60kg</td></tr><tr><td>M1656x8</td><td>Kalifa 60 suspension 2 x 35W FLU/EB</td><td>60 1/4" / 1530mm</td><td>15.0 lbs. / 8.20kg</td></tr></table>	CODE	DESCRIPTION	LENGTH	WEIGHT	M1655x8	Kalifa 48 suspension 2 x 28W FLU/EB	48 7/16" / 1230mm	14.5 lbs. / 6.60kg	M1655x8H	Kalifa 48 suspension 2 x 54W FLU/EB HO	48 7/16" / 1230mm	14.5 lbs. / 6.60kg	M1656x8	Kalifa 60 suspension 2 x 35W FLU/EB	60 1/4" / 1530mm	15.0 lbs. / 8.20kg	
CODE	DESCRIPTION	LENGTH	WEIGHT															
M1655x8	Kalifa 48 suspension 2 x 28W FLU/EB	48 7/16" / 1230mm	14.5 lbs. / 6.60kg															
M1655x8H	Kalifa 48 suspension 2 x 54W FLU/EB HO	48 7/16" / 1230mm	14.5 lbs. / 6.60kg															
M1656x8	Kalifa 60 suspension 2 x 35W FLU/EB	60 1/4" / 1530mm	15.0 lbs. / 8.20kg															
T5/G5 - 28W 																		
T5/G5 HO - 54W 																		
T5/G5 - 35W 																		

KALIFA SUSPENSION SYSTEM COMPONENTS

	M1663x8 End cap 7 7/8" x 1 15/16" x 1/8" 200 x 50 x 3mm x= ☐ white 2 ☒ grey 9		M1661x8 Kalifa suspension cable non-feed ø4" x 55"L @ 0.2 lbs. ø100 x 1400mmL @ 0.09kg x= ☐ white 2 ☒ grey 9
	M1664x8 Kalifa 90° corner 8 13/16" x 8 13/16" x 1 15/16" @ 3.0 lbs. 224 x 224 x 50mm @ 1.30kg x= ☐ white 2 ☒ grey 9		M1662x8 Kalifa suspension cable feed ø4" x 55"L @ 0.7 lbs. ø100 x 1400mmL @ 0.3kg x= ☐ white 2 ☒ grey 9



SINGLE SUSPENSION

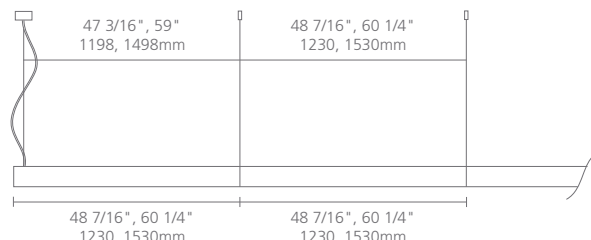

LINEAR LIGHTING SYSTEM



HQ'S PIQUADRO SPA, SILLA DI GAGGIO MONTANO (I), KARIM AZZABI

KALIFA



Kalifa recessed

- recessed ceiling luminaire for direct and diffused anti-glare T5 fluorescent lighting, high efficiency reflectors and anti-glare grilles ensure maximum efficacy and visual comfort
- recessed ceiling body in galvanized steel
- direct anti-glare emission with 4mm tempered frosted glass diffuser, uses 4 x 14W or 4 x 24W T5 lamps
- recessed ceiling mounts into standard 2' x 2' inverted exposed "T" grid ceilings (NEMA type G, max "T" width is 1") or recessed drywall installation with optional drywall installation kit (requires overhead support above drywall)
- minimum 16" clearance required above ceiling
- screen printed tempered glass, insures a lasting optical performance over time by improving maintenance and preventing dust accumulation, thus minimizing the depreciation factor
- equipped with thermally protected, class P, high power factor 120V electronic fluorescent ballast
- for 277/347V electronic fluorescent ballast, dimmable electronic ballast, and emergency lighting options, please consult your Artemide Sales Representative

STUDIO WELLA, BRUXELLES (B), CEA ARCHITECTS






Kalifa ceiling

- ceiling surface mounted luminaire for direct and diffused anti-glare T5 fluorescent lighting, high efficiency reflectors and anti-glare grilles ensure maximum efficacy and visual comfort
- body in extruded aluminum with white or grey painted finish
- direct anti-glare emission with 4mm tempered frosted glass diffuser, uses 4 x 14W or 4 x 24W T5 lamps
- mounts directly to rigid ceiling surface over standard electrical junction boxes (hardware not supplied)
- screen printed tempered glass, insures a lasting optical performance over time by improving maintenance and preventing dust accumulation, thus minimizing the depreciation factor
- equipped with thermally protected, class P, high power factor 120V electronic fluorescent ballast
- for 277/347V electronic fluorescent ballast, dimmable electronic ballast, and emergency lighting options, please consult your Artemide Sales Representative

KALIFA RECESSED ANTI-GLARE + DIFFUSING GLASS

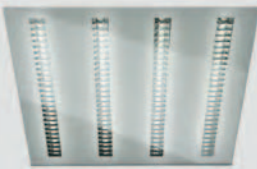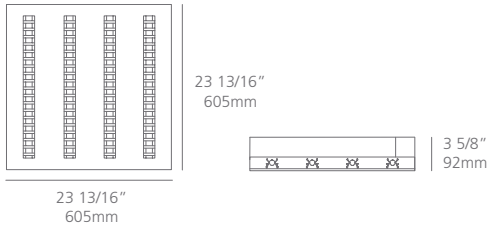


					
				T5/G5	Cd/Klm
	CODE	DESCRIPTION		GRID / DRYWALL CEILING	WEIGHT
T5/G5 - 14W	M160308	Kalifa recessed ceiling direct	4 x 14W FLU/EB	23 13/16" x 23 13/16" / 605 x 605mm	19.0 lbs. / 9.20kg
T5/G5 - 24W	M160318	Kalifa recessed ceiling direct	4 x 24W FLU/EB	23 13/16" x 23 13/16" / 605 x 605mm	19.0 lbs. / 9.20kg

KALIFA RECESSED ACCESSORIES

	M160608 Kalifa drywall installation kit for installation on plaster or sheetrock ceiling.  ceiling cut-out dimensions 24 1/8" x 24 1/8" @ 1.0 lbs. 613 x 613mm @ 0.45kg
---	---

KALIFA RECESSED INSTALLATION


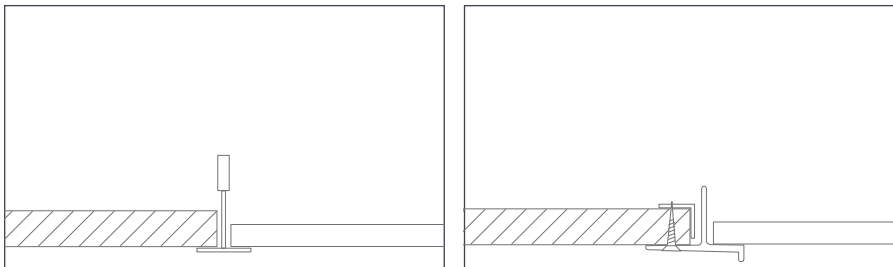


installation into 2' x 2' ceiling grid


installation into drywall ceiling using M160608 drywall installation kit

KALIFA CEILING

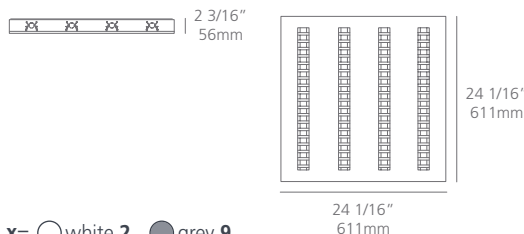

				
	x=  white 2  grey 9			T5/G5 Cd/Klm
	CODE	DESCRIPTION	WEIGHT	
T5/G5 - 14W 	M1611x8	Kalifa ceiling direct anti-glare	4 x 14W FLU/EB	22.9 lbs. / 10.40kg
T5/G5 HO - 24W 	M1612x8	Kalifa ceiling direct anti-glare	4 x 24W FLU/EB HO	22.9 lbs. / 10.40kg




KALIFA

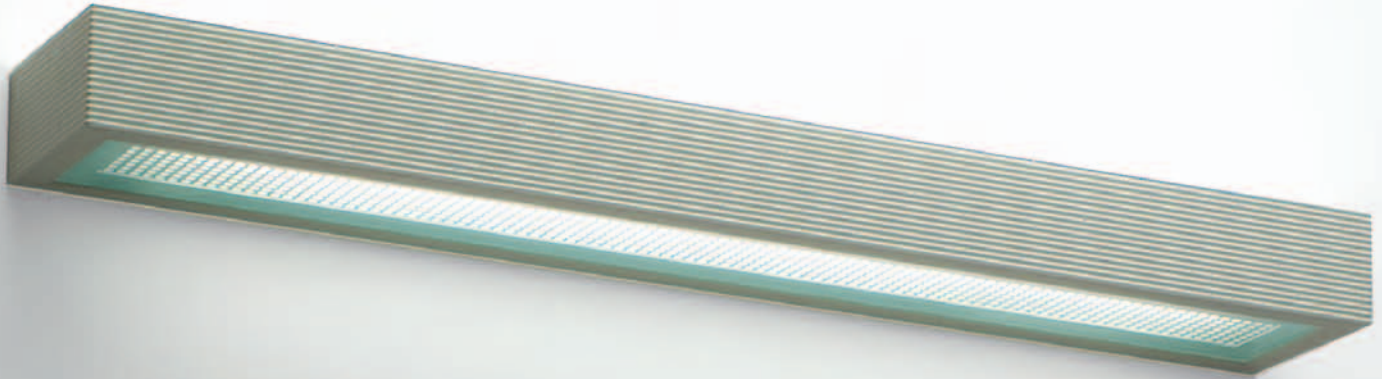

- wall mounted luminaires for direct and indirect lighting using 1 x 24W, 1 x 80W, and 2 x 55W fluorescent lighting
- body in extruded aluminum with white or grey painted finish and 4mm thick screen-printed tempered glass
- available in 3 sizes: 8 $\frac{5}{8}$ " x 23 $\frac{1}{8}$ ", 3 $\frac{1}{8}$ " x 23 $\frac{1}{8}$ ", and 3 $\frac{1}{8}$ " x 58 $\frac{5}{8}$ "
- light distribution: 81% indirect and 19% direct
- equipped with thermally protected, class P, high power factor 120V electronic fluorescent ballast
- for 277/347V electronic fluorescent ballast, dimmable electronic ballast, and emergency lighting options, please consult your Artemide Sales Representative


KALIFA 23 WALL

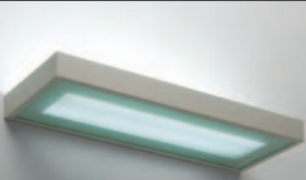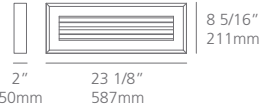

	 2" 23 1/8" 8 5/16" 50mm 587mm 211mm	 250 150 50 90° 90°								
x= ☐ white 2 ☒ grey 9										
T5/2G11 - 55W										
<table><tr><th>CODE</th><th>DESCRIPTION</th></tr><tr><td>M0243x8</td><td>Kalifa 23 wall direct and indirect</td></tr></table>		CODE	DESCRIPTION	M0243x8	Kalifa 23 wall direct and indirect	<table><tr><th>LENGTH</th><th>WEIGHT</th></tr><tr><td>23 1/8" / 587mm</td><td>7.05 lbs. / 3.20kg</td></tr></table>	LENGTH	WEIGHT	23 1/8" / 587mm	7.05 lbs. / 3.20kg
CODE	DESCRIPTION									
M0243x8	Kalifa 23 wall direct and indirect									
LENGTH	WEIGHT									
23 1/8" / 587mm	7.05 lbs. / 3.20kg									



KALIFA 23 WALL ADA



	2" 50mm 23 1/8" 587mm 3 15/16" 100mm	 T5/G5Cd/Klm								
T5/G5 - 24W 	<table><tr><th>CODE</th><th>DESCRIPTION</th><th>LENGTH</th><th>WEIGHT</th></tr><tr><td>M0241x8</td><td>Kalifa 23 wall ADA direct and indirect 1 x 24W FLU/EB</td><td>23 1/8" / 587mm</td><td>4.18 lbs. / 1.90kg</td></tr></table>	CODE	DESCRIPTION	LENGTH	WEIGHT	M0241x8	Kalifa 23 wall ADA direct and indirect 1 x 24W FLU/EB	23 1/8" / 587mm	4.18 lbs. / 1.90kg	
CODE	DESCRIPTION	LENGTH	WEIGHT							
M0241x8	Kalifa 23 wall ADA direct and indirect 1 x 24W FLU/EB	23 1/8" / 587mm	4.18 lbs. / 1.90kg							

KALIFA 59 WALL ADA



						
x= ☐ white 2 ☒ grey 9		T5/G5		Cd/Klm		
CODE		DESCRIPTION		LENGTH	WEIGHT	
M0242x8		Kalifa 59 wall ADA direct and indirect		1 x 80W FLU/EB HO	58 9/16" / 1487mm	8.15 lbs. / 3.70kg



Artemide[®]
ARCHITECTURAL

For more information please contact:
USA: 1-877-Art-9111 or online at artemide.us
Canada: 1-888-777-Arte or online at artemide.ca