


Building Mount
10-1/2" Dia.
Corridor
Walkways
Accent
Building Entrances





BL-25

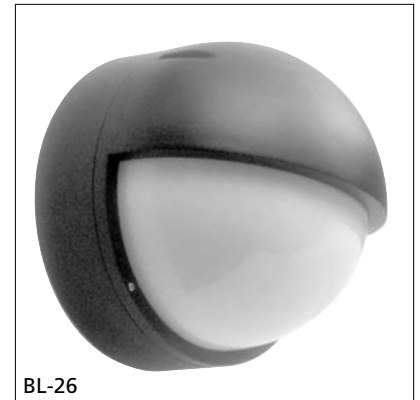

BL-26

Luminaire Dimensions

Luminaire	A	B
BL-25	10-1/2"	7-7/8"
BL-26	10-1/2"	8-1/2"
BL-27	10-1/2"	8-1/2"
BL-28	10-1/2"	8-3/8"

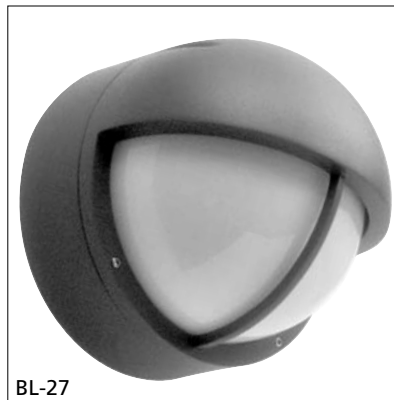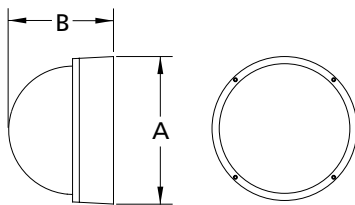

BL-27



BL-28

Specifications



Certifications The fixture shall be ETL and CETL listed for wet location. Also meets IP65 standard.

Ballast Housing Cast aluminum with a minimum thickness of 1/8". Mounting plate welded to ballast housing for J-box mounting. Conduit mounting available, consult factory. Housing is fully gasketed with 3/16" extruded EDPM cord gasket.

Lens Frame Cast aluminum mounted to ballast housing with 1/4-20 stainless steel allen cap screws.

Lens Opal UV-stabilized polycarbonate (OP) is standard. Lens supplied with one-piece extruded silicone gasket.

Ballast Maximum HID-70 watts with polycarbonate lens. Fluorescent ballast for 2-D lamp is electronic (minus 20° C). Other fluorescent 13- through 18-watt quad tube is core & coil (0° C).

Finish BK-BZ-WH-GR-GY-NA baked enamel standard, other colors available.

Product Order Guide

Series	Max Watts	Lamp Type	Voltage ¹	Lens	Finish ¹
BL-25	(2) 26 CFQ	CFQ ²	120	OP Opal Polycarbonate	BK Black
BL-26	42 CFT	CFT ²	208		BZ Bronze
BL-27	21 Watt 2-D	F212D	240		WH White
BL-28	70 MH	E-17	277		GR Green
	70 HPS ³	E-17			NA Natural Aluminum
					GY Gray
					CC Custom Color

¹ Consult factory for other colors and voltages

² CF = single biax, CFQ = double biax, CFT = triple biax

³ 70 HPS 120V only

PROJECT
FIXTURE TYPE
CATALOG#


PROJECT
FIXTURE TYPE
CATALOG#

2930 South Fairview Street
 Santa Ana, CA 92704
 Phone: 714 668 3660
 Fax: 714 668 1107
 sales@allscape.net
 http://www.allighting.com

BL-30/31/32/33



BL-30

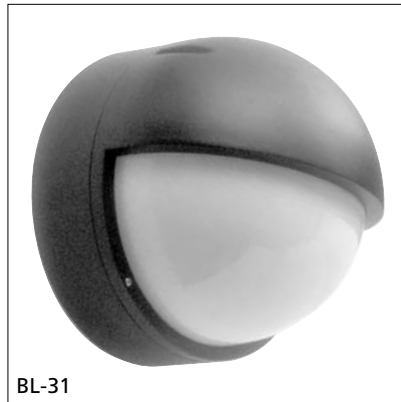

BL-31

Building Mount


14" Dia.

Corridor

Walkways

Accent

Building Entrances

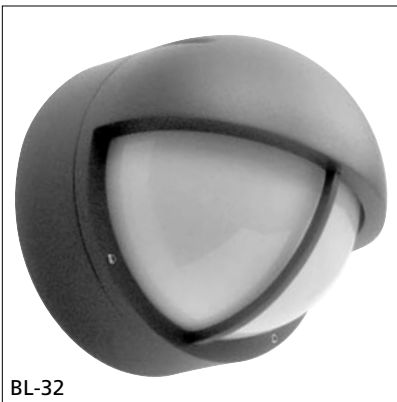


BL-32



BL-33

Luminaire Dimensions

Luminaire	A	B
BL-30	14"	9-7/8"
BL-31	14"	10-1/2"
BL-32	14"	10-1/2"
BL-33	14"	10-3/8"

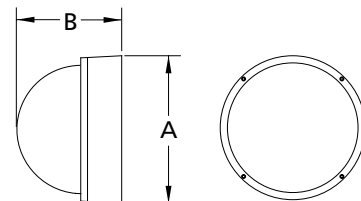

Specifications



Certifications

The fixture shall be ETL and CETL listed for wet location. Also meets IP65 standard.

Ballast Housing

Cast aluminum with a minimum thickness of 1/8". Mounting plate welded to ballast housing for J-box mounting. Conduit mounting available, consult factory. Housing is fully gasketed with 3/16" extruded EDPM cord gasket.

Lens Frame

Cast aluminum mounted to ballast housing with 1/4-20 stainless steel allen cap screws.

Lens

Opal UV-stabilized polycarbonate (OP) is standard. Lens supplied with one-piece extruded silicone gasket.

Ballast

Maximum HID-100 watts with polycarbonate lens. Fluorescent ballasts for 42CFT and 2-D lamps are electronic (minus 20° C). Other fluorescent 13- through 26-watt quad tube is core & coil (0° C).

Finish

BK-BZ-WH-GR-GY-NA baked enamel standard, other colors available.

Product Order Guide

Series	Max Watts	Lamp Type	Voltage ¹	Lens	Finish ¹	Options
BL-30	(2) 26CFQ	CFQ ²	120	OP Opal Polycarbonate	BK Black	EMG Emergency Battery Backup
BL-31	(2) 42CFT	CFT ²	208		BZ Bronze	
BL-32	38 Watt 2-D	F382D	240		WH White	
BL-33	100 MH 100 HPS	E-17 E-17	277		GR Green NA Natural Alum GY Gray CC Custom Color	

¹ Consult factory for other colors and voltages

² CF = single biax, CFQ = double biax, CFT = triple biax