


**Pedestrian Areas**

**Walkways**

**Parks**

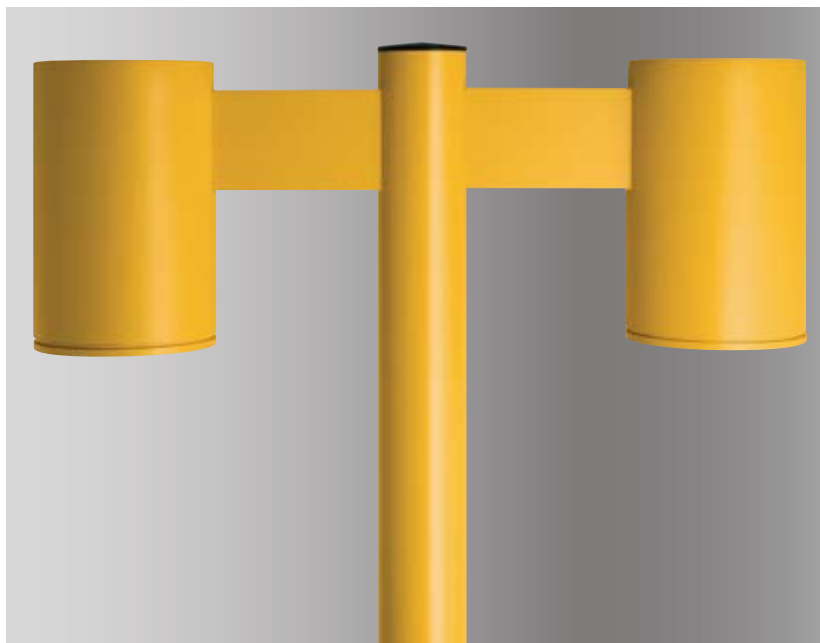

AA-127-D-PM2180

### Specifications



**Certifications** ETL and CETL listed for wet location and meets IP65 standard, dust-tight and water-jet proof.

**Lamp/Ballast Housing** The housing is constructed of extruded aluminum and heavy wall aluminum castings.

**Lens** The lens shall be clear tempered safety glass, sealed to the housing with high temperature silicone.

**Lens Frame** Heavy duty cast aluminum lens frame is supplied as standard. Fastened to housing with four 1/4-20 stainless steel Allen cap screws.

**Reflectors** Spun aluminum highly specular Alzak™ finish for either NEMA type 2 spot (SPT) or NEMA type 3 flood (FLD) distributions. Fluorescent flood reflector for up to 42W CFT lamps.

**Lamp Holder** Porcelain 4kv pulse rated medium base for HID and Incandescent lamp sources.

**Mounting Details** The mounting arm is attached to the pole with two 3/8" all thread rods and accompanying nuts and washers.

**See Installation Sheet For More Details**

**Finish** BK-BZ-WH-GR-GY-NA baked enamel paint standard. Powder coat and custom colors available on request.

PROJECT
FIXTURE TYPE
CATALOG#

2930 South Fairview Street  
 Santa Ana, CA 92704  
 Phone: 714 668 3660  
 Fax: 714 668 1107  
 sales@allscape.net  
 http://www.alllighting.com

## Product Order Guide

Series	Max Watts	Lamp Type	Voltage <sup>1</sup>	Optics	Finish <sup>2,3</sup>	Options
AA-127	<b>Fluorescent</b>					
	18CFQ	CFQ	120	SPT <sup>6</sup> Spot	BK Black	D <sup>5</sup> Downlight
	42CFT	CFT	208	FLD <sup>6</sup> Flood	BZ Bronze	U <sup>5</sup> Uplight
			240	FL Fluorescent	WH White	UD <sup>5</sup> Up/Downlight
			277		GR Green	PM2180 Pole Mount 2@180
	<b>Metal Halide</b>				NA Natural Aluminum	PM290 Pole Mount 2@90
	70MH	E17			GY Gray	PM3120 Pole Mount 3@120
	70MH	Par30 <sup>4</sup>			CC Custom Color	PM490 Pole Mount 4@90
	70MH	Par38 <sup>4</sup>				
	70MH	T6				
	<b>High Pressure Sodium</b>					
	70HPS	E17				
	<b>Incandescent</b>					
	100INC	Par38 <sup>4</sup>	120			

<sup>1</sup> Consult factory for other voltages.

<sup>2</sup> Consult factory for other finishes.

<sup>3</sup> Baked enamel paint is standard, powder coat is optional.

<sup>4</sup> Does not require internal optics.

<sup>5</sup> Specify D-optics and/or U-optics.

<sup>6</sup> Spot Nema 2 (T6 & E17), Flood Nema 3 (T6 & E17)

Note: E-17 Lamps 175W and below are medium base  
 CF=single bi-ax, CFQ = double bi-ax, CFT = triple bi-ax

## Example: AA-127-42CFT-120-FL-BK-D-PM2180

### Luminaire Dimensions

Luminaire	A		B		C		Weight	
	Inch	mm	Inch	mm	Inch	mm	lbs.	kg
AA-127-D	8.00	203	12.75	324	13.50	343	11.50	5.20
AA-127-D-PM2180	8.00	203	12.75	324	27.00	686	23.00	10.40

