




## INSTALLATION SHEET

### Safety, Warnings and Suggestions

- <sup>1</sup> **Care** should be taken not to position fixtures in locations where bare skin can come into contact with the potentially high temperatures on the lens.
- <sup>2</sup> **Make** sure that electrical power is disconnected before any work is performed.
- <sup>3</sup> **All** gaskets and sealing surfaces must be kept clean during installation.
- <sup>4</sup> **All** wiring and installation should meet local, state and national electrical codes.
- <sup>5</sup> **Install** correct lamp type and wattage.



TYPICAL VIEWS

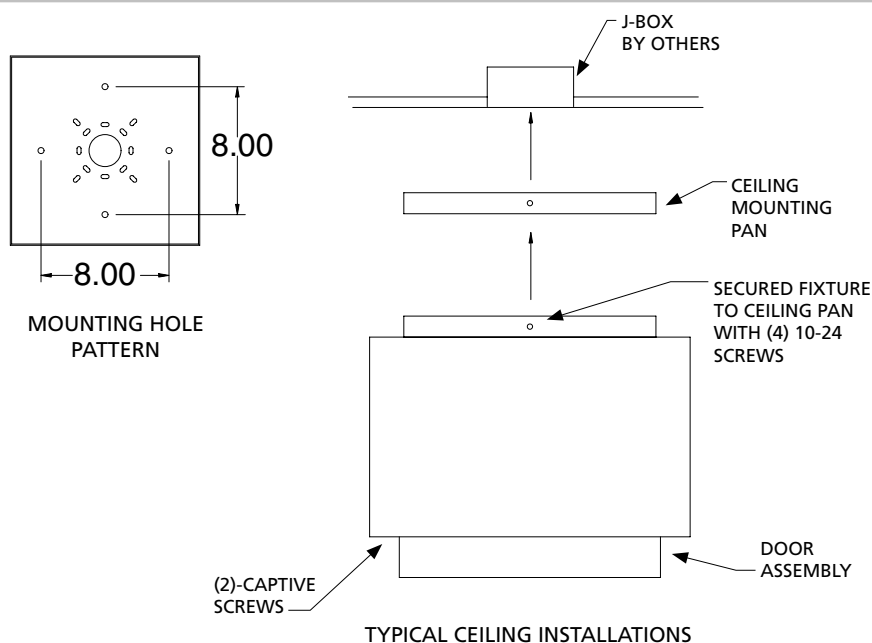

1. (CEILING INSTALLATION)  
Remove the fixture from the box. Remove the ceiling mounting pan by loosening the (4) screws from the top of the unit. Secure the ceiling pan to the junction box or ceiling surface; (4) 1/4-20 hex bolts are required (bolts by others). Bring fixture up to the ceiling pan (make electrical connection see #3) and secure the fixture to the ceiling pan with (4) 10-24 screws (see detail on the left).

2. (CONCEALED ARM INSTALLATION)  
Remove the fixture from the box and remove (2) 3/8 hex bolts from the back of the unit and throw away. Open the arm kit and install the 3/8" all-thread rods with the crimped end toward the unit, as shown on the arm detail. Apply the gasket to the unit, slide the arm over the rods and feed the wires through. Slide the rods into the pole and tighten the nuts inside the pole using a flat washer, lock washer and nut.

3. Make power and ground connections using UL approved connectors at the top of the pole section and/or at the J-box (J-box by others).

4. Open the door by loosening the (2) captive screws at the door. Swing the door down. Install the correct lamp, close the door, and retighten the captive screws.

