

3

FARO UE




**FARO UE**  
Catenary Mounted Luminaire

FARO UE delivers precise, glare-free, indirect illumination with exceptional uniformity from its unique patented optical system. Twin pairs of connecting rods join the cast aluminum housing to the formed aluminum roof, housing the secondary reflector system


and luminaire suspension points. Primary illumination is projected from a deep drawn parabolic reflector housing a T6 metal halide lamp. Computer designed injection molded plastic modules are vacuum metallized for specularity. Facets capture then redirect the

light beams, producing a uniform square pattern on the ground. With cut-off of less than 60°, the light quality is both effective and unobtrusive. Luminaire is finished in finely textured paint. All hardware is stainless steel. Standard color; matte silver grey metallic or

graphite grey. Special colors available. Requires catenary cable, building mounted hardware, and structural design by others. See technical data sheet for details.

 Listed for Wet Locations

Model	Reflector	Number of Facets	Lamp	Weight
FA720UE	□ 28.3"	324	150 MH / 70 MH	60 lbs

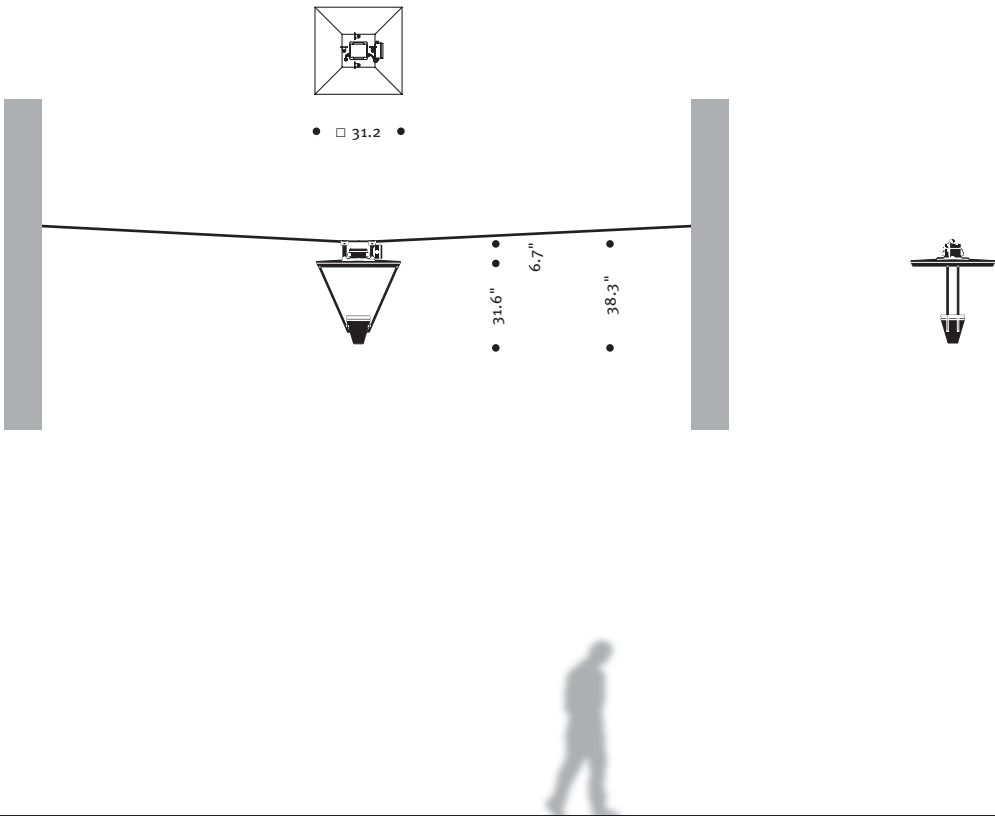

Design: Lichtlabor Bartenbach / Karsten Winkels