

CIRRUS® Themes

Critters™ & Leaves™

Tegular fine texture



Cirrus Themes Critters with Suprafine® 9/16" Exposed Tee grid



Cirrus Themes Leaves with Suprafine 9/16" Exposed Tee grid

Key Selection Attributes


- A variety of individual lighthearted panel designs on Cirrus refined texture; can be spot-painted
- Excellent sound absorption
- 30-Year Limited System Warranty against mold/mildew and bacterial growth
- Hardware Friendly Options are available for plain panels 295 and 299, providing precut finished edge details for fixture openings (1" to 16" diameter)

Typical Applications

- Healthcare – assists in addressing HIPAA requirements
- Pediatric areas
- Lobbies/reception areas
- Specialty shops/stores
- Playful theme interiors

Face View Drawings

Cirrus Critters



S500/S550 S501/S551 S502/S552 S503/S553 S510/S560 S512/S562 S299/S295


Face View Drawings

Cirrus Leaves



S600/S650 S601/S651 S602/S652 S603/S653 S604/S654 S605/S655 S299/S295

Detail and Grid Intersections

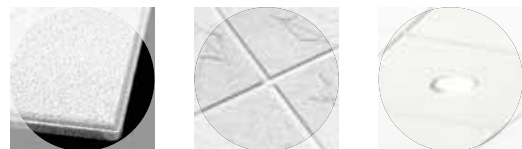

CIRRUS Themes Plain Panel

CIRRUS Themes Leaves with SUPRAFINE 9/16" Exposed Tee grid

Hardware Friendly Options Available

Color



White (WH)

Cirrus Themes Panels may be spot-painted



↑ Cirrus Grain Direction ↓



CIRRUS® Themes

Critters™ & Leaves™

Tegular fine texture

Recycled Content: 65-83%







LEED® Credits

LEED® Credits						LEED for Schools	
Energy	Waste Mgmt	Recycled Content	Local Materials	Renewable Materials	Daylight & Views	Acoustics	Low Emitting or CHPS
✓	✓	✓	✓	✓	✓		✓
Location Dependent							

\$\$\$\$\$

Visual Selection

Performance Selection Dots represent highest level of performance.

Edge Profile	Item No.	Dimensions	UL Classified		Fire Rating	Light Reflect	Sag Resist	Anti-Microbial	VOC Formaldehyde	Durable	Recycle Program	
			Acoustics NRC	CAC								
CIRRUS Themes Critters*												
9/16" Beveled Tegular 	S500 Series S500M Series	2' x 2' x 3/4" 600 x 600 x 19mm	<input type="checkbox"/>	0.65 ●	35	Class A	0.86 ●	S	BioBlock+	No Added	S	Yes ●
15/16" Angled Tegular 	S550 Series S550M Series	2' x 2' x 3/4" 600 x 600 x 19mm	<input type="checkbox"/>	0.65 ●	35	Class A	0.86 ●	S		No Added	S	●
CIRRUS Themes Leaves*												
9/16" Beveled Tegular 	S600 Series S600M Series	2' x 2' x 3/4" 600 x 600 x 19mm	<input type="checkbox"/>	0.65 ●	35	Class A	0.86 ●	S		No Added	S	●
15/16" Angled Tegular 	S650 Series S650M Series	2' x 2' x 3/4" 600 x 600 x 19mm	<input type="checkbox"/>	0.65 ●	35	Class A	0.86 ●	S		No Added	S	●
CIRRUS Themes Plain Panel – available with Hardware Friendly Options (U.S. Patent 5,231,810)												
9/16" Beveled Tegular 	S299 S299M	2' x 2' x 3/4" 600 x 600 x 19mm	<input type="checkbox"/>	0.65 ●	35	Class A	0.86 ●	S		No Added	S	●
15/16" Angled Tegular 	S295 S295M	2' x 2' x 3/4" 600 x 600 x 19mm	<input type="checkbox"/>	0.65 ●	35	Class A	0.86 ●	S		No Added	S	●

S = Standard

* Ceiling design copyrighted by AWI Licensing Company.

Note: Specify Cirrus Themes plain panels S299/S295 when plain panels are required.

Suspension Systems

9/16"	Standard: Interlude®, Sonata™, Suprafine®
15/16"	Standard: Prelude®

Physical Data

Material

Wet-formed mineral fiber

Surface Finish

Factory-applied latex paint

Fire Performance

ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled)

ASTM E1264 Classification

Type III, Form 1, Pattern E I K Z (scored multi-patterned finish)
S299, S295 – Type III, Form 1, Pattern E I
Fire Class A

No-Added Formaldehyde

No-added formaldehyde – free of formaldehyde-based resins. Outperform CHPS Section 01350 requirements. (Independent test reports available upon request.)

Anti Mold/Mildew & Bacteria

BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

Insulation Value

R Factor – 1.9 (BTU units)
R Factor – 0.33 (Watts units)

Backloading Recommendation

Contact TechLine for specific information

30-Year Performance Guarantee & Warranty Information

See warranty details at armstrong.com/warranty

Application Considerations

Specify matching plain panels S299/S295 when required. Not recommended for rooms containing MRI equipment.

Weight: Square Feet/Carton

All design panels – 1.38 lbs/SF; 8 SF/ctn
S295 – 1.09 lbs/SF; 48 SF/ctn
S299 – 1.17 lbs/SF; 48 SF/ctn

TechLineSM / 1 877 ARMSTRONG

1 877 276 7876

armstrong.com/ceilings (search: cirrus)

CS-3058-109

© AWI Licensing Company, 2009 • Printed in the United States of America

