




FIXTURE NO.: P-110 PLANAR VERTICAL SERIES		TYPE:
DRAWN BY: DsS	DATE DRAWN: 9/18/12	1:16
REVISED BY: PTO	DATE REVISED: 10/02/12	REV: B

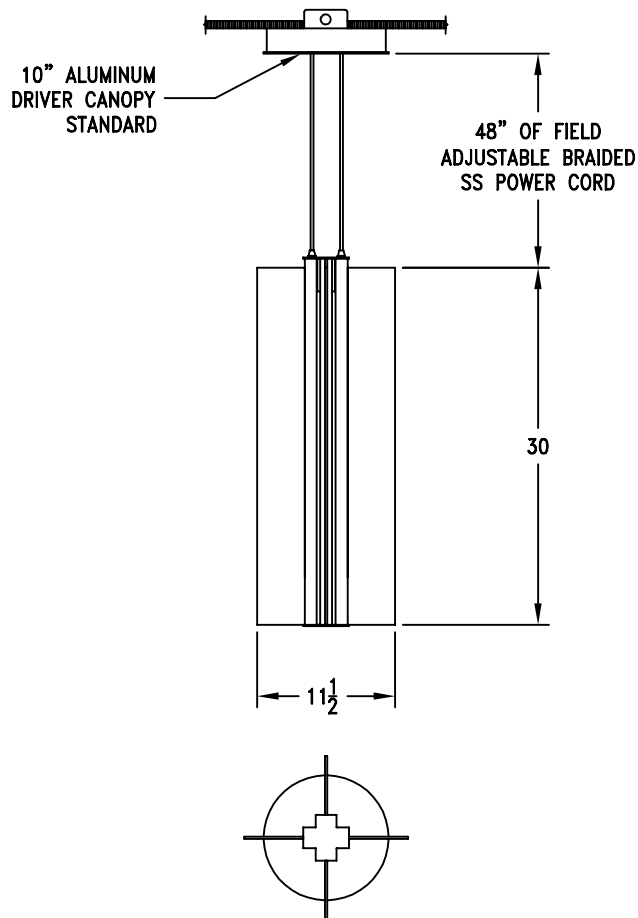

SHOWN WITHOUT OPTIONAL DOWNLIGHT



DOWNLIGHT OPTION

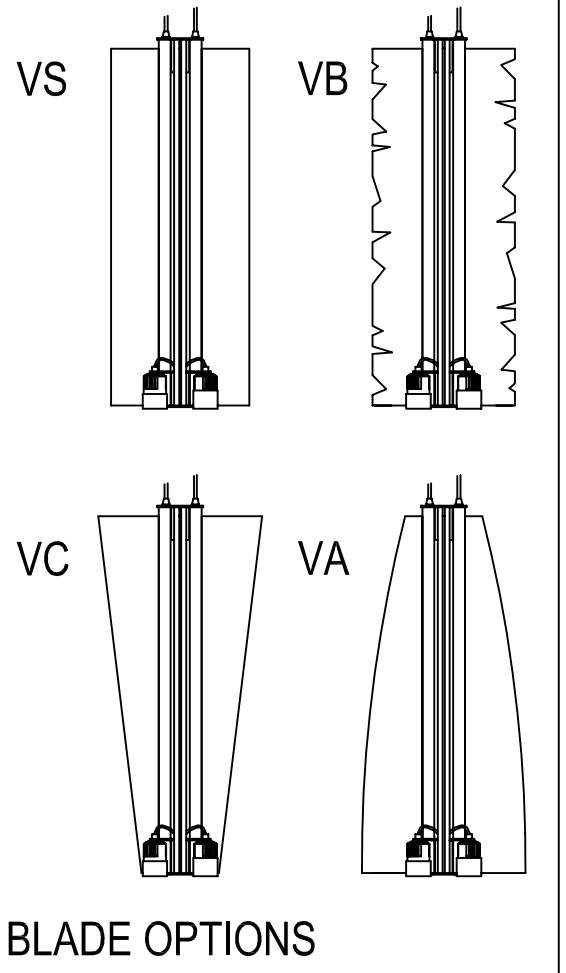

BLADE OPTIONS

4L10C30



DOWNLIGHT OPTION

## SPECIFICATIONS

PATENT PENDING - DESIGN MODIFICATION RIGHTS RESERVED © 2012 DIGITAL SPECK LIGHTING by Manning

**HOUSING:** P-110 - CUSTOM EXTRUDED FRAME MEMBERS, MACHINED ALUMINUM BODY COMPONENTS, WITH SPUN CANOPY & MOUNT.

**BLADES:** (4) OPTICALLY CLEAR, 4.5mm THICK, LASER CUT AND LIGHT GUIDE DISTRIBUTION ENHANCED, ACRYLIC PLANAR OPTIC.

**SPECIFY BLADE DESIGN OPTION:** ☐ VS ☐ VB ☐ VC ☐ VA

**LAMPING:** 20L7C40 - (20) INTEGRATED LED STRIPS = 140 WATTS, 14,700 Lm, 4000K, 82 CRI, L70-60,000 HR.

**DN LAMPING:** 4L10C30 - (4) INTEGRATED LED ARRAYS = 40 WATT, 1712 Lm, 3000K, 85 CRI, L70-60,000 HR.

**SPECIFY DOWNLIGHT OPTION:** ☐ 4L10C30 ☐ NO DOWNLIGHT

**DRIVER:** UNIVERSAL VOLTAGE AND 0-10 DIMMING ARE AVAILABLE ON MOST SOLID STATE CONFIGURATIONS.  
PLEASE CONSULT FACTORY WITH YOUR SPECIFIC CONTROL SYSTEM FOR VERIFICATION OF COMPATIBILITY.

**FINISH:** ANODIZED ARCHITECTURAL BLACK OR MATTE SILVER WITH BLACK ANODIZED OR POWDER COAT COMPONENT DETAILS.

**SPECIFY ANODIZED OPTION:** ☐ ZB - ANODIZED BLACK ☐ ZS - ANODIZED SILVER

**MOUNTING:** FIXTURE MOUNTS TO A STANDARD OCTAGONAL JUNCTION BOX. ALL MOUNTING HARDWARE TO BE SUPPLIED BY OTHERS.  
FIXTURE IS SUITABLE FOR USE IN INTERIOR "DRY" LOCATIONS, WITH UL RECOGNIZED COMPONENTS.

**WARRANTY:** DIGITAL SPECK LIGHTING by Manning: 5 YEARS. TERRALUX DN LAMPING: 5 YEARS

APPROVED: \_\_\_\_\_ DATE: \_\_\_\_\_