
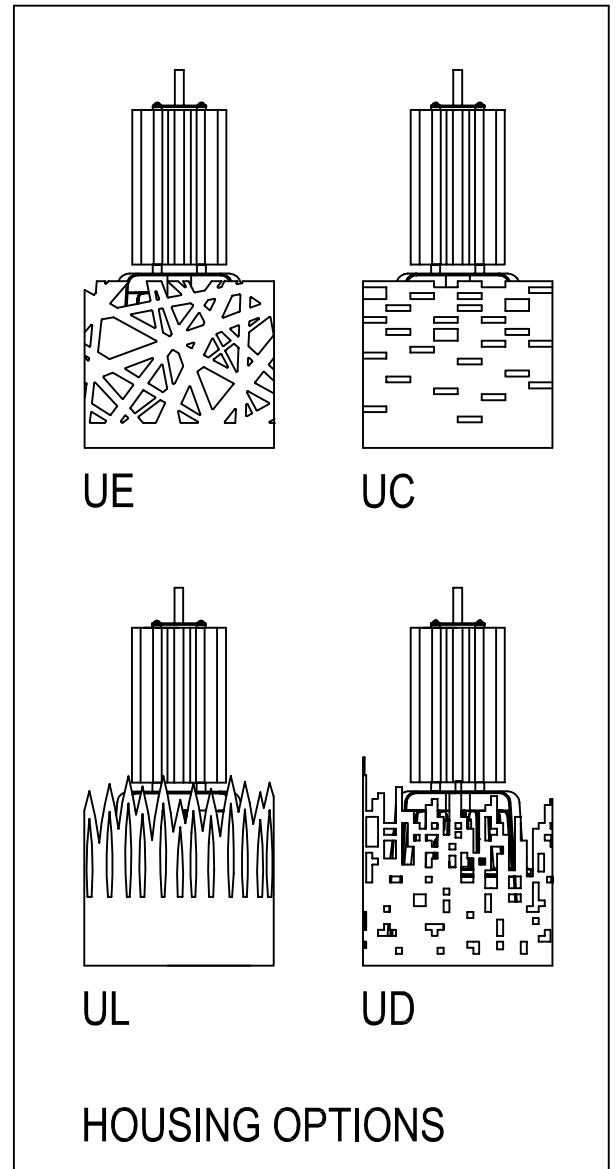


FIXTURE NO.: P-130 SKYY SERIES		TYPE:
DRAWN BY: DsS	DATE DRAWN: 9/24/12	1:8
REVISED BY: PTO	DATE REVISED: 10/03/12	REV: B

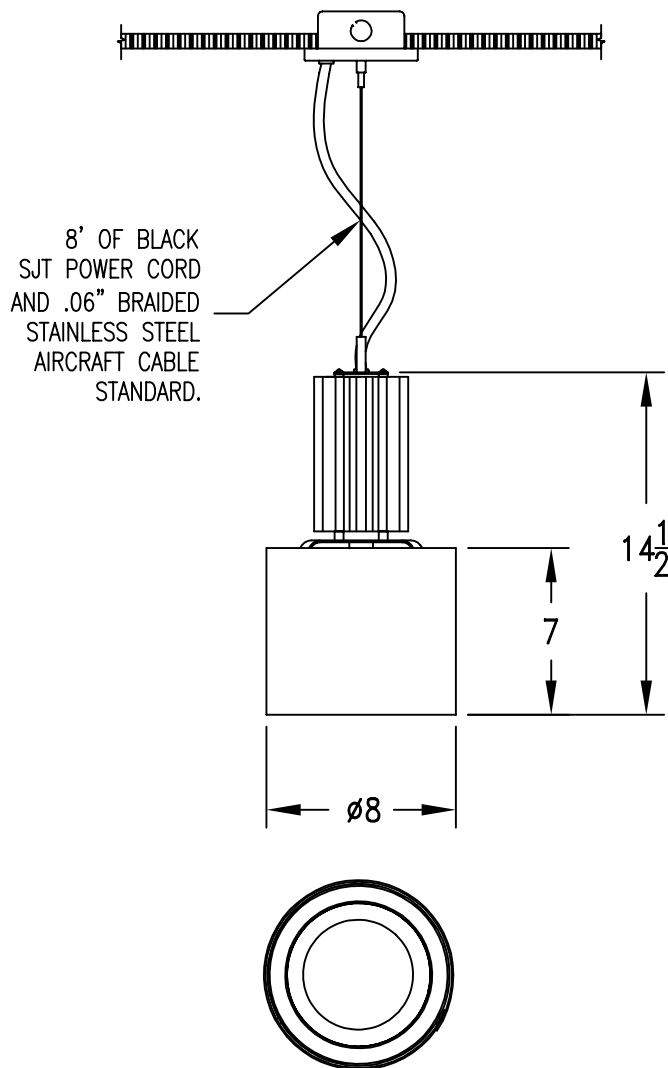

SPECIFICATIONS

-----DESIGN MODIFICATION RIGHTS RESERVED © 2012 DIGITAL SPECK LIGHTING by Manning -----

HOUSING: P-130 - .090 FABRICATED, LASER CUT OR PUNCHED ALUMINUM WRAP, EXTRUDED AND DIECAST HEATSINK COMPONENTS.

SPECIFY HOUSING DESIGN OPTION: ☐ UE ☐ UC ☐ UL ☐ UD

LAMPING: 1L48C40 - (1) INTEGRATED LED ARRAY = 48 WATTS, 2116 Lm, 4000K, 83 CRI, L70 - 75,000 HR.

DRIVER: UNIVERSAL VOLTAGE AND 0-10 DIMMING ARE AVAILABLE ON MOST SOLID STATE CONFIGURATIONS.
PLEASE CONSULT FACTORY WITH YOUR SPECIFIC CONTROL SYSTEM FOR VERIFICATION OF COMPATIBILITY.

FINISH: "PP" BLACK, WHITE OR SILVER - DIMENSIONAL WRAP SURFACE & CANOPY COATED WITH A SATIN, LOW VOC, THERMO CURE, POLYESTER POWDER COAT PAINT. BLACK CORD, LED ARRAY HOUSING, AND INTERNAL STRUCTURE WITH CLEAR ANODIZED DRIVER HEAT SYNC HOUSING, STANDARD. **SPECIFY FINISH:** ☐ "BK" BLACK ☐ "WH" WHITE ☐ "SR" SILVER

MOUNTING: FIXTURE MOUNTS TO A STANDARD OCTAGONAL JUNCTION BOX. ALL MOUNTING HARDWARE TO BE SUPPLIED BY OTHERS.
FIXTURE IS SUITABLE FOR USE IN "DRY" LOCATIONS, UL RECOGNIZED COMPONENTS.

WARRANTY: PLEASE CONSULT FACTORY.

APPROVED: _____ DATE: _____