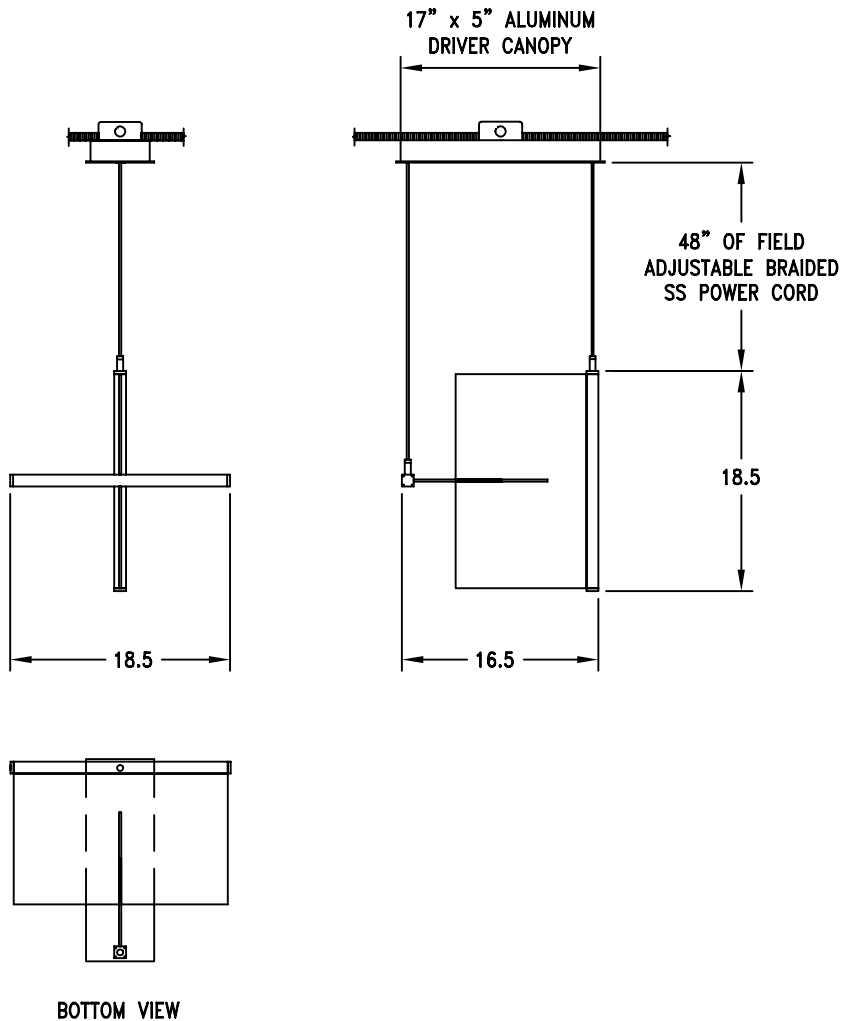





|                                     |                        |        |
|-------------------------------------|------------------------|--------|
| FIXTURE NO.: P-180 PLANAR 2D SERIES |                        | TYPE:  |
| DRAWN BY: DsS                       | DATE DRAWN: 9/27/12    | 1:16   |
| REVISED BY: PTO                     | DATE REVISED: 10/02/12 | REV: B |

**DQ****DA****DC****BLADE OPTIONS**

## SPECIFICATIONS

----- PATENT PENDING - DESIGN MODIFICATION RIGHTS RESERVED © 2012 DIGITAL SPECK LIGHTING by Manning -----

**HOUSING:** P-180 - CUSTOM EXTRUDED ALUMINUM FRAME MEMBERS, FABRICATED CANOPY COMPONENTS AND STEEL MOUNT PLATE.

**BLADES:** (2) OPTICALLY CLEAR, 4.5mm THICK, LASER CUT AND LIGHT GUIDE DISTRIBUTION ENHANCED, ACRYLIC PLANAR OPTIC.

**SPECIFY BLADE DESIGN OPTION:** ☐ DQ ☐ DA ☐ DC

**LAMPING:** 6L7C40 - (6) INTEGRATED LED STRIPS = 42 WATTS, 4,410Lm, 4000K, 82 CRI, L70-60,000 HR.

**DRIVER:** UNIVERSAL VOLTAGE AND 0-10 DIMMING ARE AVAILABLE ON MOST SOLID STATE CONFIGURATIONS.  
PLEASE CONSULT FACTORY WITH YOUR SPECIFIC CONTROL SYSTEM FOR VERIFICATION OF COMPATIBILITY.


**FINISH:** ANODIZED ARCHITECTURAL BLACK OR MATTE SILVER WITH BLACK ANODIZED OR POWDER COAT COMPONENT DETAILS.

**SPECIFY ANODIZED OPTION:** ☐ ZB - ANODIZED BLACK ☐ ZS - ANODIZED SILVER



**MOUNTING:** FIXTURE MOUNTS TO A STANDARD OCTAGONAL JUNCTION BOX. ALL MOUNTING HARDWARE TO BE SUPPLIED BY OTHERS.  
FIXTURE IS SUITABLE FOR USE IN INTERIOR "DRY" LOCATIONS, WITH UL RECOGNIZED COMPONENTS.

**WARRANTY:** DIGITAL SPECK LIGHTING by Manning: 5 YEARS.

APPROVED: \_\_\_\_\_ DATE: \_\_\_\_\_



|                                     |                        |        |
|-------------------------------------|------------------------|--------|
| FIXTURE NO.: P-185 PLANAR 2D SERIES |                        | TYPE:  |
| DRAWN BY: DsS                       | DATE DRAWN: 9/28/12    | 1:16   |
| REVISED BY: PTO                     | DATE REVISED: 10/02/12 | REV: B |

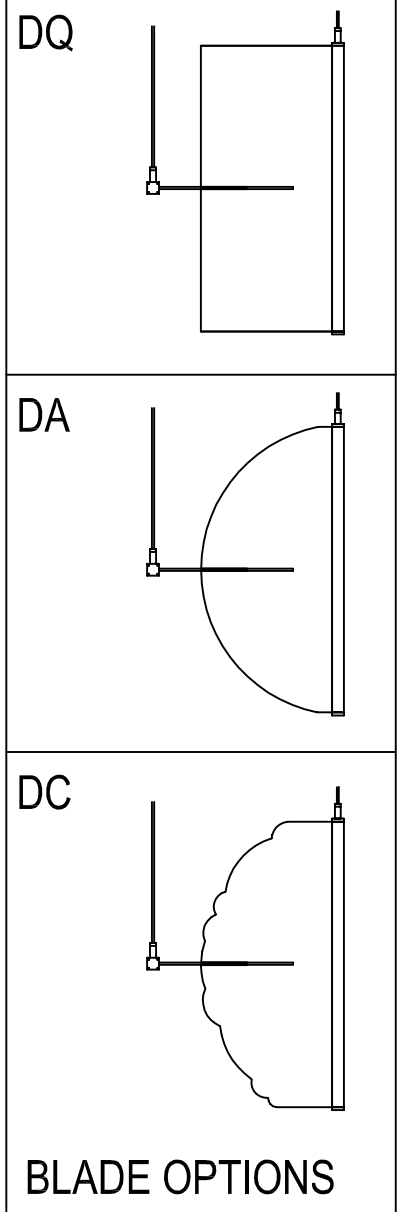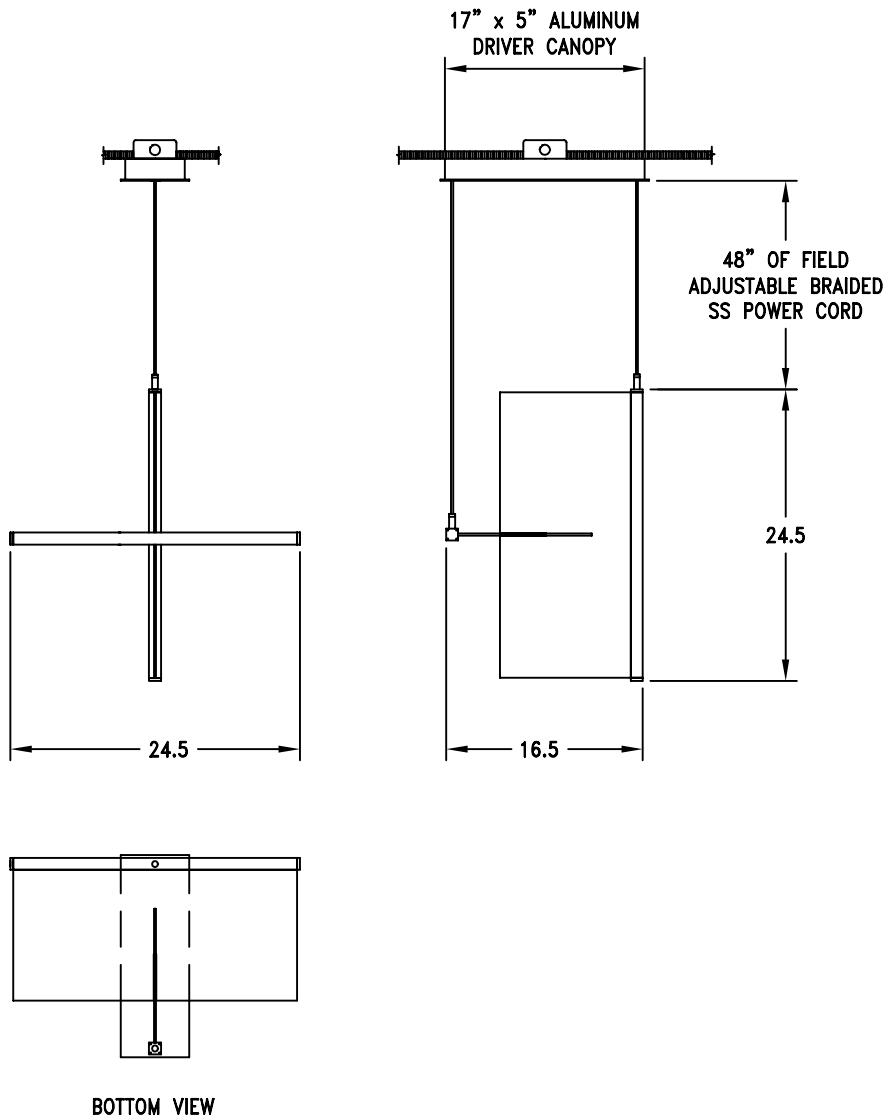

## SPECIFICATIONS

PATENT PENDING - DESIGN MODIFICATION RIGHTS RESERVED © 2012 DIGITAL SPECK LIGHTING by Manning

**HOUSING:** P-185 – CUSTOM EXTRUDED ALUMINUM FRAME MEMBERS, FABRICATED CANOPY COMPONENTS AND STEEL MOUNT PLATE.

**BLADES:** (2) OPTICALLY CLEAR, 4.5mm THICK, LASER CUT AND LIGHT GUIDE DISTRIBUTION ENHANCED, ACRYLIC PLANAR OPTIC.

**SPECIFY BLADE DESIGN OPTION:** ☐ DQ ☐ DA ☐ DC

**LAMPING:** 8L7C40 – (8) INTEGRATED LED STRIPS = 56 WATTS, 5,880lm, 4000K, 82 CRI, L70–60,000 HR.

**DRIVER:** UNIVERSAL VOLTAGE AND 0–10 DIMMING ARE AVAILABLE ON MOST SOLID STATE CONFIGURATIONS.  
PLEASE CONSULT FACTORY WITH YOUR SPECIFIC CONTROL SYSTEM FOR VERIFICATION OF COMPATIBILITY.

**FINISH:** ANODIZED ARCHITECTURAL BLACK OR MATTE SILVER WITH BLACK ANODIZED OR POWDER COAT COMPONENT DETAILS.

**SPECIFY ANODIZED OPTION:** ☐ ZB – ANODIZED BLACK ☐ ZS – ANODIZED SILVER

**MOUNTING:** FIXTURE MOUNTS TO A STANDARD OCTAGONAL JUNCTION BOX. ALL MOUNTING HARDWARE TO BE SUPPLIED BY OTHERS.  
FIXTURE IS SUITABLE FOR USE IN INTERIOR "DRY" LOCATIONS, WITH UL RECOGNIZED COMPONENTS.

**WARRANTY:** DIGITAL SPECK LIGHTING by Manning: 5 YEARS.

APPROVED: \_\_\_\_\_ DATE: \_\_\_\_\_