


FIXTURE NO.: W-100 PUK LUMe SERIES		TYPE:
DRAWN BY: DsS	DATE DRAWN: 9/24/12	1:4
REVISED BY: PTO	DATE REVISED: 10/03/12	REV: B

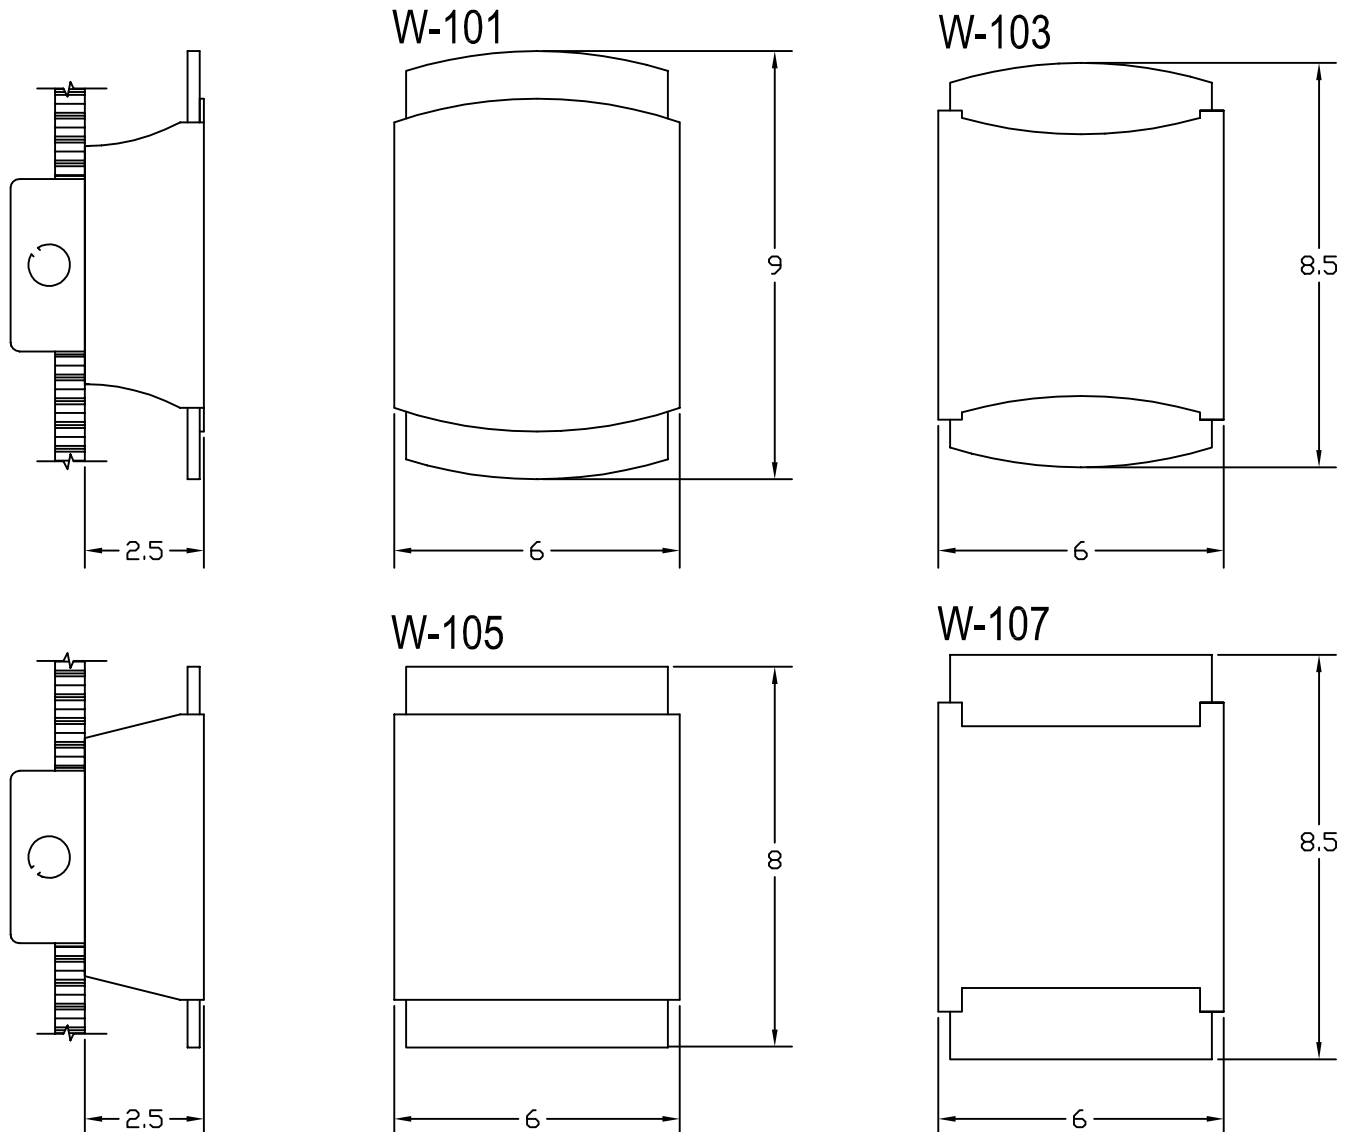

SPECIFICATIONS

HOUSING OPTIONS

-----DESIGN MODIFICATION RIGHTS RESERVED © 2012 DIGITAL SPECK LIGHTING by Manning -----

HOUSING: CONSISTS OF 0.090 THICK FABRICATED, LASER CUT ALUMINUM, WITH AN ELECTRO-GALVANIZED STEEL MOUNTING PLATE.

SPECIFY HOUSING DESIGN OPTION: ☐ W-101 ☐ W-103 ☐ W-105 ☐ W-107

LUMe BLADE: CONSISTS OF (2) .125 THICK LASER CUT, SATIN FINISH, ACRYLIC ACCENT BLADES. (6) COLOR OPTIONS AVAILABLE.

SEE WEB SITE OR CONTACT LOCAL AGENT FOR COLOR OPTIONS.

LAMPING: 2L8M35 - (2) INTEGRATED LED MODULES = 16 WATTS, 970 Lm, 3500K, 85 CRI, L70-60,000 HR.

DRIVER: UNIVERSAL VOLTAGE AND 0-10 DIMMING ARE AVAILABLE ON MOST SOLID STATE CONFIGURATIONS.

PLEASE CONSULT FACTORY WITH YOUR SPECIFIC CONTROL SYSTEM FOR VERIFICATION OF COMPATIBILITY.

FINISH: "PP" POWDER PAINT - ALL SURFACES SEALED WITH A LOW VOC, THERMO CURE, POLYESTER POWDER COAT PAINT.

SEE WEB SITE OR CONTACT LOCAL AGENT FOR COLOR OPTIONS.

MOUNTING: FIXTURE MOUNTS TO A STANDARD OCTAGONAL JUNCTION BOX. ALL MOUNTING HARDWARE TO BE SUPPLIED BY OTHERS.

FIXTURE IS SUITABLE FOR USE IN "DAMP" LOCATIONS, WITH IP-65 RATED, UL RECOGNIZED COMPONENTS.

WARRANTY: TERRALUX: 5 YEARS.

APPROVED: _____ DATE: _____