

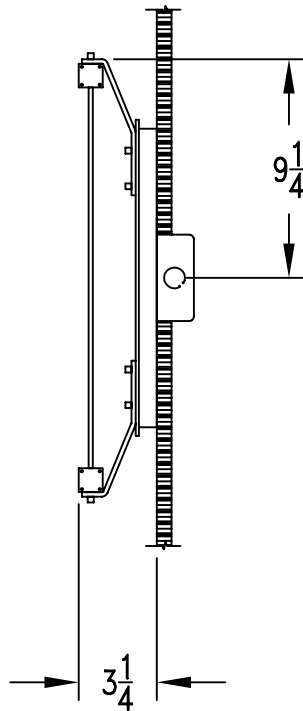
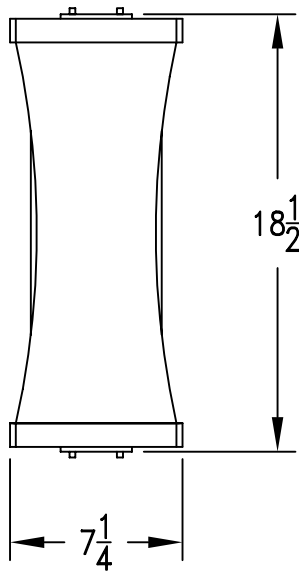



FIXTURE NO.: W-120 PLANAR STRETCH SCONCE		TYPE:
DRAWN BY: DsS	DATE DRAWN: 9/26/12	1:8
REVISED BY: PTO	DATE REVISED: 10/02/12	REV: B



SA

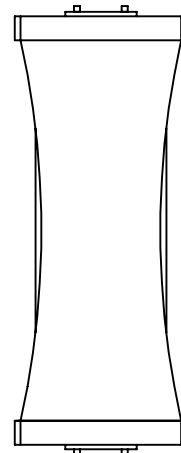

SH

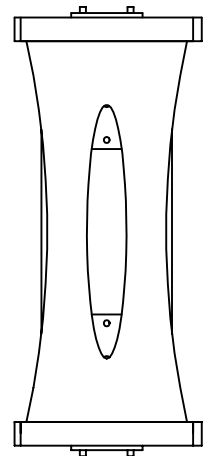

BLADE OPTIONS

## SPECIFICATIONS

PATENT PENDING - DESIGN MODIFICATION RIGHTS RESERVED © 2012 DIGITAL SPECK LIGHTING by Manning

**HOUSING:** W-120 - CUSTOM EXTRUDED FRAME MEMBERS, MACHINED ALUMINUM BODY COMPONENTS, WITH A FAB CANOPY & MOUNT.

**BLADES:** (1) OPTICALLY CLEAR, 4.5mm THICK, LASER CUT AND LIGHT GUIDE DISTRIBUTION ENHANCED, ACRYLIC PLANAR OPTIC.

**SPECIFY BLADE DESIGN OPTION:** ☐ SA ☐ SH

**LAMPING:** 2L7C40 - (2) INTEGRATED LED STRIPS = 14 WATTS, 1470 Lm, 4000K, 82 CRI, L70-60,000HR.

**DRIVER:** UNIVERSAL VOLTAGE AND 0-10 DIMMING ARE AVAILABLE ON MOST SOLID STATE CONFIGURATIONS.  
PLEASE CONSULT FACTORY WITH YOUR SPECIFIC CONTROL SYSTEM FOR VERIFICATION OF COMPATIBILITY.

**FINISH:** ANODIZED ARCHITECTURAL BLACK OR MATTE SILVER WITH BLACK ANODIZED OR POWDER COAT COMPONENT DETAILS.

**SPECIFY ANODIZED OPTION:** ☐ ZB - ANODIZED BLACK ☐ ZS - ANODIZED SILVER

**MOUNTING:** FIXTURE MOUNTS TO A STANDARD OCTAGONAL JUNCTION BOX. ALL MOUNTING HARDWARE TO BE SUPPLIED BY OTHERS.  
FIXTURE IS SUITABLE FOR USE IN INTERIOR "DRY" LOCATIONS, WITH UL RECOGNIZED COMPONENTS.

**WARRANTY:** DIGITAL SPECK LIGHTING by Manning: 5 YEARS.

APPROVED: \_\_\_\_\_ DATE: \_\_\_\_\_