



DIGITALSPECK_{*}L I G H T I N G

digitalspeck.com

FIXTURE NO.: W-130 SKYY SERIES		TYPE:
DRAWN BY: DsS	DATE DRAWN: 9/18/12	1:8
REVISED BY: PTO	DATE REVISED: 10/03/12	REV: B

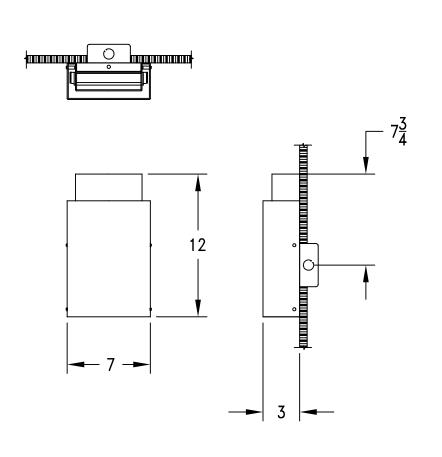

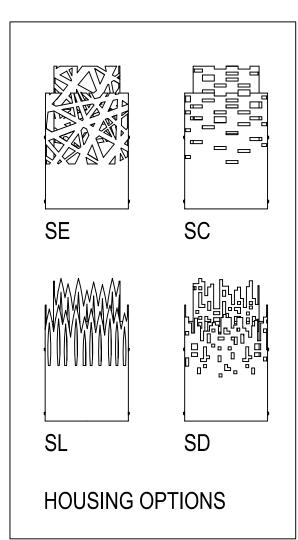

SPECIFICATIONS

	DESIGN MODIFICATION RIGHTS RESERVED © 2012 DIGITAL SPECK LIGHTING by Manning
HOUSING:	W-130090 THICK FABRICATED, LASER CUT OR PUNCHED ALUMINUM LAYERS, ELECTRO GALVANIZED MOUNTING PLATE. SPECIFY HOUSING DESIGN OPTION: ☐ SE ☐ SC ☐ SL ☐ SD
LAMPING:	1L11M35 - (1) INTEGRATED LED MODULE = 11 WATTS, 715 Lm, 3500K, 85 CRI, L70 - 60,000 HR.
DRIVER:	UNIVERSAL VOLTAGE AND 0-10 DIMMING ARE AVAILABLE ON MOST SOLID STATE CONFIGURATIONS. PLEASE CONSULT FACTORY WITH YOUR SPECIFIC CONTROL SYSTEM FOR VERIFICATION OF COMPATIBILITY.
	"OW" OPTICAL WHITE - ALL SURFACES ARE OPTIMIZED FOR PERFORMANCE OUTPUT WITH A SATIN WHITE, LOW VOC, THERMO CURE, POLYESTER POWDER COAT PAINT.
	FIXTURE MOUNTS TO A STANDARD OCTAGONAL JUNCTION BOX. ALL MOUNTING HARDWARE TO BE SUPPLIED BY OTHERS. FIXTURE IS SUITABLE FOR USE IN "WET" LOCATIONS, WITH IP-65 RATED, UL RECOGNIZED COMPONENTS.
VARRANTY:	TERRALUX: 5 YEARS.
APPROVED:	DATE: