



PRODUCT SHEET

ELLIPSE 7842

78 x 42 x 21
Versatile by design.



© BAINULTRA®

FEATURES

Installation type	- Drop-in - Undermount
No. of bathers	2
Heated backrest	1
Control	MiaPlus
ThermoMasseur® bath	\$
Soaker bath	\$

THERAPIES

Chromatherapy 3-LED	\$
Sound Therapy (Euphonia™ System)	\$

COLORS

Standards



White



Bone



Biscuit



Almond

Optionals



Black



Mexican
sand



Innocent
blush



Cashmere



Sandbar



Grey

WARRANTY

Controls*	5 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty



IMPORTANT: KEEP THE ORIGINAL. PLEASE MAKE COPIES.

MERIDIAN™: ELLIPSE 6036, ELLIPSE 7240, **ELLIPSE 7842**, MERIDIAN 50, MERIDIAN 55, MERIDIAN 60, PRO-MERIDIAN 55, PRO-MERIDIAN 60

 **BainUltra®**

The quest for your wellness™
www.bainultra.com


ELLIPSE 7842 78 x 42 x 21

ACCESSORIES - OPTIONAL

Drain & overflow	D-10 (17" - 22")	
	- Chrome	\$
	- White, Biscuit, Bone	\$
	- Brass	\$
	- Brushed nickel, Polished nickel, Oil-rubbed bronze	\$

Control	MiaMulti	\$
Cutting template	# 90000002	
Others	- There is a height difference for the rolled deck (see drawing Detail A). - Available with flat deck for undermounting or rolled deck.	

TOTAL PRICE \$

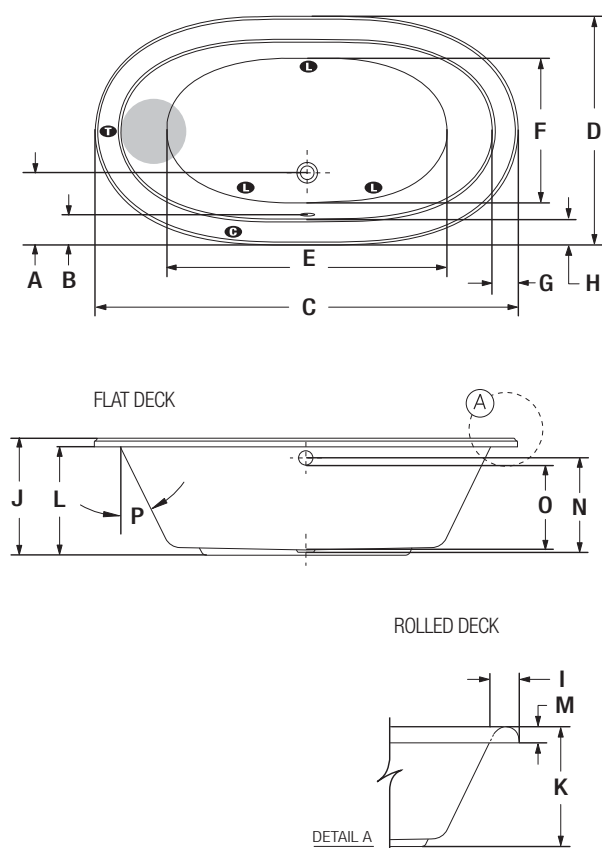

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	12 1/4"
B	Outside edge to overflow	5 5/8"
C	Total length	77 5/8"
D	Total width	41 7/8"
E	Bathing well length	51 5/8"
F	Bathing well width	26 5/8"
G	Deck width at backrest end	6 3/8"
H	Deck width	5 1/2"
I	Rolled deck width	5 1/2"
J	Height from bottom of tub to top deck	21 1/2"
K	Height from bottom of tub to top deck	22 1/4"
L	Height from bottom of tub to bottom of lip	20"
M	Height from bottom of lip to top deck	2 1/2"
N	Height from drain to center of overflow	17 1/4"
O	Maximum water level	15 1/2"
P	Slope of backrest	23°

T Indicates turbine position
L Indicates LED light position
C Indicates control position when factory-installed

ELLIPSE 7842 TECHNICAL SPECIFICATIONS

Jets	44	Hot water supply required Should be 70% of water capacity of tub or greater.
US gallons	68	
Imp. gallons	56	
Approx. shipping weight	145 lbs	Turbine access Must be at least 18" X 22" to access the pump. Must be connected to a 15 A. 120 V, 60 Hz, protected by a ground-fault circuit interrupter (GFCI) on a dedicated line.
Turbine power	755 W	
Air heater	700 W	Standards All BainUltra products meet and/or exceed the highest quality and certification standards. For further details about BainUltra's product standards, please go to the following link: (www.bainultra.com/standards). Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation).

1 800 463.2187 | From 8 a.m. to 8 p.m. Monday to Thursday (EST) . From 8 a.m. to 5 p.m. on Friday (EST)

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.