




PRODUCT SHEET

TEKURA 6636

66 x 36 x 21

Thoughtful design. Inspired care.

Drop-in / Alcove (3 walls) / Freestanding with **C-20** Contour



© BAINULTRA®

Wood



© BAINULTRA®

Acrystal™

FEATURES	
Installation type	- Drop-in - Alcove (3 walls) - Freestanding
No. of bathers	1
Heated backrest	1
MyBodyRest™ complete set in Wood or Acrystal™	Includes Headrests, Armrests & Legrests
Control	MiaPlus
ThermoMasseur® bath	\$
Soaker bath	\$
With Morphosys™	\$

THERAPIES	
Chromatherapy 2-LED	\$
Sound Therapy (Euphonia™ System)	\$

COLORS	
Standards	
White	Bone
Biscuit	Almond
Optionals	
Black	Mexican sand
Innocent blush	Cashmere
Sandbar	Grey

NEW SELECTION OF PANELS WITH MORPHOSYS™	
Wood	Stainless steel

WARRANTY	
Controls*	5 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty

IMPORTANT: KEEP THE ORIGINAL. PLEASE MAKE COPIES.

TEKURA™: TEKURA 6636: C-20 / C-21 / C-22 / C-23 A & B / C-24, TEKURA 7242: C-20 / C-21 / C-22 / C-23 A & B / C-24



The quest for your wellness™
www.bainultra.com

TEKURA 6636 66 x 36 x 21


ACCESSORIES - OPTIONAL

Skirts	Littora \$ SJ-1 \$	Elegance \$
Drain & overflow	D-10 (17" - 22") - Chrome \$ - White, Biscuit, Bone \$ - Brass \$ - Brushed nickel, Polished nickel, Oil-rubbed bronze \$	

Control	MiaMulti \$
Other	Optional tile flange. \$ (specify right or left)
Note	For freestanding installation The Morphosys™ spec sheet is available at bainultra.com

TOTAL PRICE	\$
--------------------	----

C-20 Contour

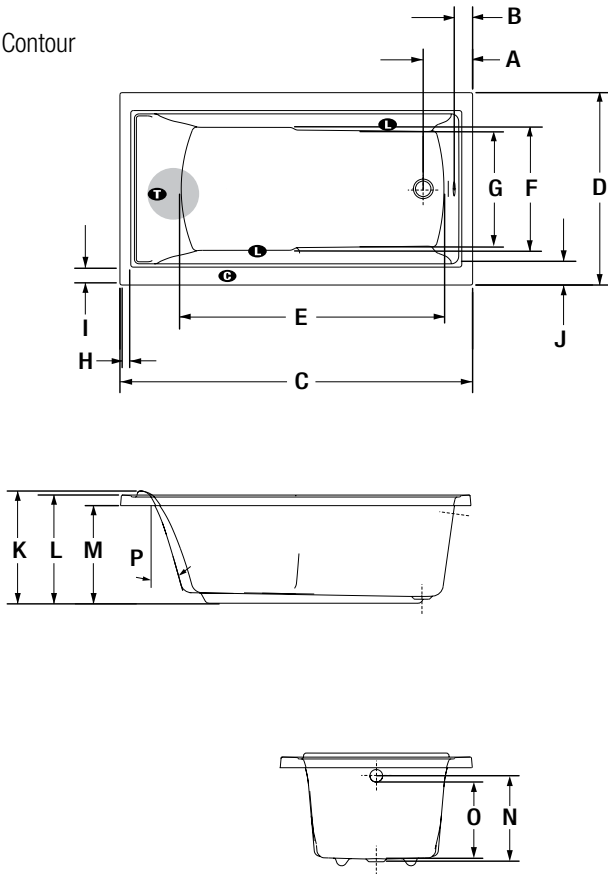

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	9 1/4"
B	Outside edge to overflow	3 1/2"
C	Total length	66"
D	Total width	36"
E	Bathing well length	49 5/8"
F	Bathing well width at sitting area	23 1/4"
G	Bathing well width at foot area	22 1/4"
H	Flat surface width	1 3/8"
I	Flat surface width	2 3/4"
J	Deck width	4 1/2"
K	Total height to headrest	21 1/4"
L	Height from bottom of tub to top deck	20 1/2"
M	Height from bottom of tub to bottom of lip	18 1/2"
N	Height from drain to center of overflow	16"
O	Maximum water level	14 1/4"
P	Slope of backrest	16°

- T** Indicates turbine position
- L** Indicates LED light position
- C** Indicates control position when factory-installed

TEKURA 6636 TECHNICAL SPECIFICATIONS

Jets	41
US gallons	68
Imp. gallons	56

Turbine power	755 W
Air heater	700 W

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine access	Must be at least 18" X 22" to access the pump. Must be connected to a 15 A, 120 V, 60 Hz, protected by a ground-fault circuit interrupter (GFCI) on a dedicated line.
Standards	All BainUltra products meet and/or exceed the highest quality and certification standards. For further details about BainUltra's product standards, please go to the following link: www.bainultra.com/standards .
Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation).	

1 800 463.2187 | From 8 a.m. to 8 p.m. Monday to Thursday (EST) . From 8 a.m. to 5 p.m. on Friday (EST)

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.