ACCESSORIES AND PARTS 620-AVPCP



Product Type

2.5 GPM Max. Flow Rate @ 80 PSI Shower Head with Arm, Flange, and Ball Joint

Features & Specifications

- Swivel ball head for adjustable positioning
- Pressure Compensating Flow Control
- Vandal Resistant Screw

Warranty

- Lifetime Limited Faucet Warranty
- 1-Year Limited Finish Warranty

Codes & Standards

• ASME A112.18.1/CSA B125.1

Job Name	
Item Number	
Section/Tag	
Model Specified	
Architect	
Engineer	
Contractor	
[] Submitted as Shown	[] Submitted with Variations
Date	









Architect/Engineer Specification

Chicago Faucets No. 620-AVPCP, 2.5 GPM Max. Flow Rate @ 80 PSI Shower Head with Arm, Flange, and Ball Joint, Chrome Plated plated solid brass construction. Swivel ball head for adjustable positioning. Pressure Compensating Flow Control. Vandal Resistant Screw.



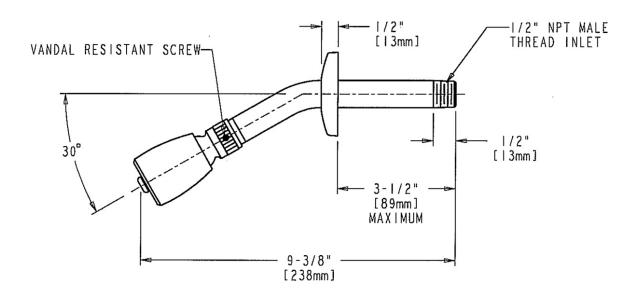

Operation and Maintenance

Installation should be in accordance with local plumbing codes. Flush all pipes thoroughly before installation. After installation, remove spout outlet or flow control and flush faucet thoroughly to clear any debris. Care should be taken when cleaning the product. Do not use abrasive cleaners, chemicals or solvents as they can result in surface damage. Use mild soap and warm water for cleaning and protecting the life of Chicago Faucet products. For specific operation and maintenance refer to the installation instructions and repair parts documents that are located at www.chicagofaucets.com.

Chicago Faucets, member of the Geberit Group, is the leading brand of commercial faucets and fittings in the United States, offering a complete range of products for schools, laboratories, hospitals, office buildings, food service, airports and sport facilities. Call 1.800.TECTRUE or 1.847.803.5000 Option 1 for installation or other technical assistance.



2100 South Clearwater Drive Des Plaines, IL P: 847/803-5000 F: 847/803-5454 Technical: 800/TEC-TRUE

__ www.chicagofaucets.com