

LEVER OPERATED GLASS FILLERS

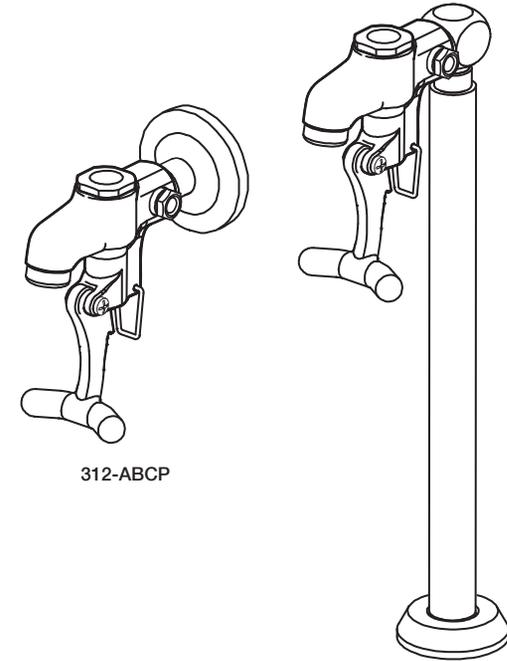

312-ABCP

712-ABCP

**Limited One Year Warranty**

Chicago Faucets warrants to the original purchaser (other than for purposes of resale) that such product is free from defects in material and workmanship for a period of one (1) year from the date of purchase. During this one-year warranty period, if the product is found to be defective, Chicago Faucets shall, at its option, repair and/or replace it. To obtain warranty service, products must be returned to:

The CHICAGO FAUCET Company
Warranty Repair Department
2100 S. Clearwater Drive
Des Plaines, IL 60018

Shipping, freight, insurance, and other transportation charges of the product to Chicago Faucets and the return of repaired or replaced product to the purchaser are the responsibility of the purchaser. Repair and/or replacement shall be made within a reasonable time after receipt by Chicago Faucets of the returned product. This warranty does not cover items which have received secondary finishing or have been altered or modified after purchase, or for defects caused by physical abuse to or misuse of the product, or shipment of the products.

Any express warranty not provided herein, and any remedy for Breach of Contract which might arise, is hereby excluded and disclaimed. Any implied warranties of merchantability or fitness for a particular purpose are limited to one year in duration. Under no circumstances shall Chicago Faucets be liable for loss of use or any special consequential costs, expenses or damages.

Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. Specific rights under this warranty and other rights vary from state to state.


The Chicago Faucet Company
2100 South Clearwater Drive
Des Plaines, IL 60018
Phone: 847/803-5000
Fax: 847/803-5454
Technical: 800/832-8783
www.chicagofaucets.com

Installation


1. Turn off the water supply and drain the supply lines before installation.
2. Hand-tighten the flange clockwise until seated firmly against the filler body (wall mount) or riser (deck mount).
3. Remove locknut and metal washer from inlet shank.
4. Insure that the flange rubber seal washer is in place before placing against wall or deck.
5. Insert threaded inlet shank into position and slide metal washer on first, then thread locknut onto shank by hand. Tighten with wrench to secure valve into place for permanent installation.
6. Connect water supply line and tighten onto inlet shank securely.
7. Turn on water supply and check for leaks.
8. Test the operation of the glass filler by activating the valve and allowing water to cycle through the valve.

Flow Adjustment



Use a screwdriver to turn the Flow Adjustment Valve in either direction to adjust the flow rate.




312-ABCP



712-ABCP

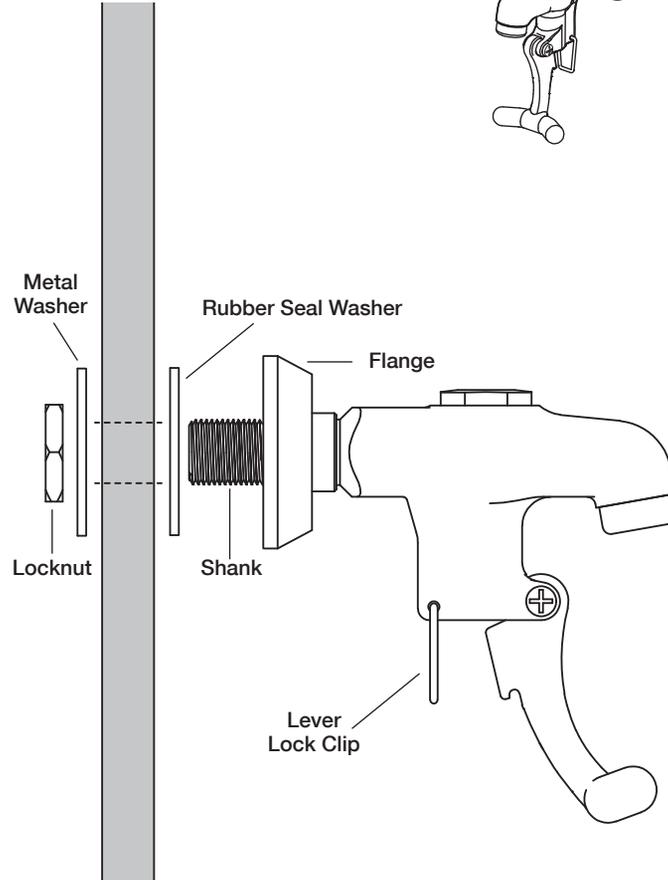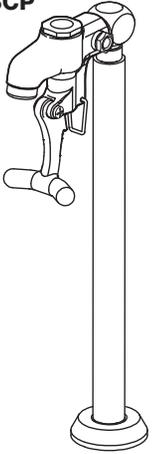

Wall Mount

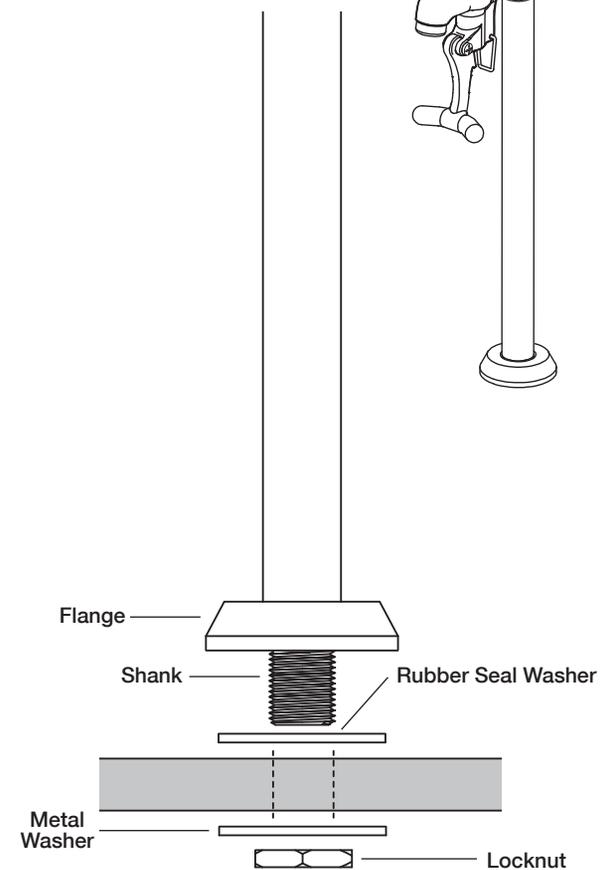

Deck Mount