

MARAZZI  **USA**

the fine art of porcelain stoneware


(saturnia)

glazed porcelain stoneware

Made In The USA







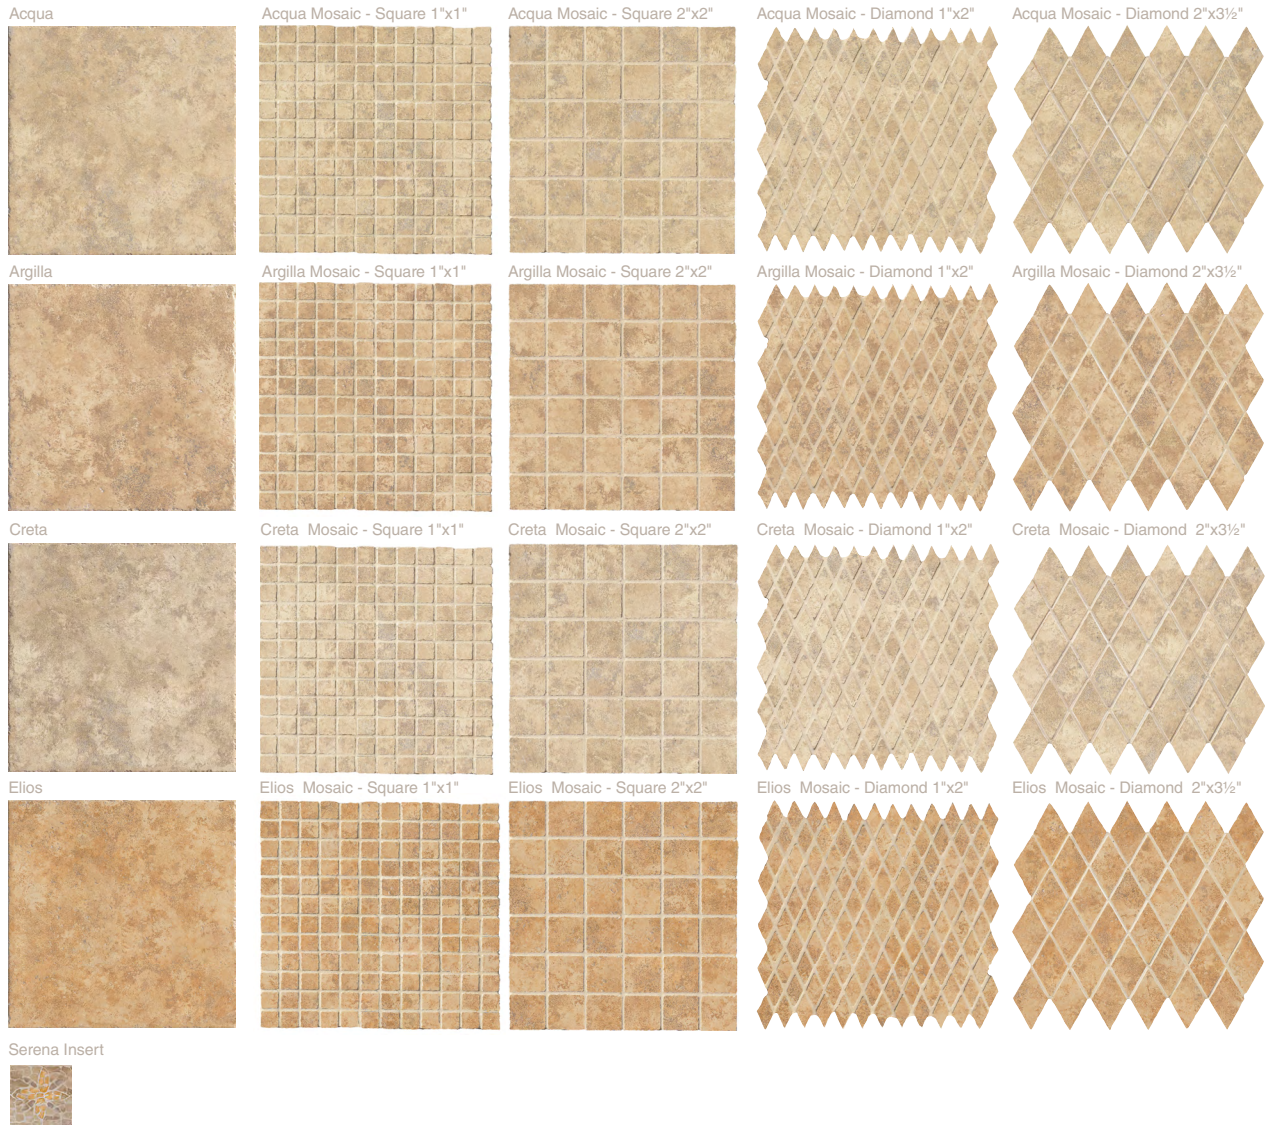



Made In The USA



Contributes to LEED Credits **made in the USA**

ASTM Test Results

FLOOR TILE	DECOS						TRIMS*
							
13"x13" (33.3x33.3 cm)	20"x20" (50x50 cm)	13"x13" (33.3x33.3 cm)	13"x13" (33.3x33.3 cm)	13"x13" (33.3x33.3 cm)	13"x13" (33.3x33.3 cm)	4"x4" (10x10 cm)	3"x13" (8x33.3 cm)
Thickness 7/16" (10.5 mm)	7/16" (11 mm)	Mosaic - Square 1"x1"	Mosaic - Square 2"x2"	Mosaic - Diamond 1"x2"	Mosaic - Diamond 2"x3 1/2"	Insert	Bullnose
Names (colors)							
Acqua (ivory)	FB24	FB28	FC2K***	FC2P***	FC2T***	FC2X***	FB2C
Argilla (walnut)	FB25	FB29	FC2L***	FC2Q***	FC2U***	FC2Y***	FB2D
Creta (gray)	FB26	FB2A	FC2M***	FC2R***	FC2V***	FC2Z***	FB2E
Elios (gold)	FB27	FB2B	FC2N***	FC2S***	FC2W***	FC22***	FB2F
Serena (Complements all colors)							FB2G*

Notes: * Corner-Inserts are imported, rated Class 3, suggested for interior residential applications only, have a SCOF less than 0.50 (wet), do not meet ADA recommendations and made to complement Floor Tile.

** Trim is available in all colors and made to complement Floor Tile.

*** Individual pieces on Mesh-mounted Mosaics are tumbled to intentionally create distressed edges that add timeless character. As in nature, the edges can appear irregular and slightly worn, adding a slightly rustic touch.

Technical Characteristics	ANSI Standards	ASTM Test Results	ASTM Test Methods
Water Absorption	≤ 0.50%	≤ 0.50%	C373
Frost Resistance	As Reported	Resistant	C1026
Scratch Resistance	MOHS 1-10	6	MOHS Scale
Breaking Strength	≥ 250 lbf.	≥ 300 lbf.	C648
Facial Dimension	-3.0% < Nominal ≤ 3.0%	Within Standard	C499
Nominal Thickness	≤ 0.04 in (1.02 mm max)	Within Standard	C499
Wedging (squareness)	+/- 0.50% or +/- 2.0 mm**	Within Standard	C502
Warpage (flatness)	+/- 0.75% or +/- 2.3 mm**	Within Standard	C485
Abrasion Resistance	Class 0 - Class V	Class IV*	C1027
DCOF-Dynamic Coefficient of Friction (Wet Areas Only)†	As Reported	Minimum 0.42	DCOF AcuTest SM *
SCOF-Static Coefficient of Friction (Dry)	As Reported	0.60 ≤ S.C.O.F. < 0.70	C1028
SCOF-Static Coefficient of Friction (Wet)	As Reported	0.60 ≤ S.C.O.F. < 0.70	C1028
Chemical Resistance	Class A - Class E	Class A	C650
Stain Resistance	Class A - Class E	Class A	C1378

† Dynamic Coefficient of Friction (DCOF) - Water, oil, grease or other fluids create slippery conditions. When installing floors in areas with exposure to these conditions, a minimum D.C.O.F. value of 0.42 is required. Additionally, extra caution is required with regards to product selection and proper maintenance. Visit www.tcnatl.com for complete information regarding the DCOF AcuTest test method and values.

* DCOF AcuTest is the industry designation for the test procedure contained in ANSI A137.1 Section 9.6, which has been extensively researched, allows for in-situ field measurements, and is in use at tile manufacturing facilities. It was so named to distinguish it from other DCOF measurements using different instruments and/or protocols.

** Whichever is less