
LIMELIGHT EQUATION



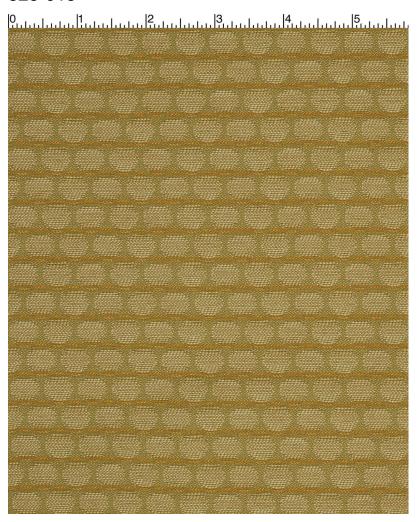

CONTENT

100% Pre-Consumer Recycled Polyester

BACKING

None

FINISH APPROVED FOR Nano-Tex, DuraBlock

WIDTH WEIGHT DIR SHOWN RR 9.61 oz./linear yard Yes No

VISUAL REPEAT
1.0" H, 0.75" V

ROLL LENGTH
N/A

BREAKING STRENGTH

Warp 157/Fill 171

ABRASION RESISTANCE

Passes 70,000 Double Rubs

PILLING RESISTANCE

Class 4

COLORFASTNESS TO CROCKING

Dry: Class 4 min/Wet: Class 4 mi

COLORFASTNESS TO LIGHT

60 hours

CLEANING

WS: Water/Solvent Cleaner - Spot clean with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry cleaning product, follow instructions carefully and clean only in a well-ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding. Always rinse promptly with clean water.

FLAMMABILITY

Passes Cal 117 Section E; NFPA 260 (Equiv. to UFAC) Class 1. May comply with Cal. Tech. Bul. 133 when combined with appropriate components.

