
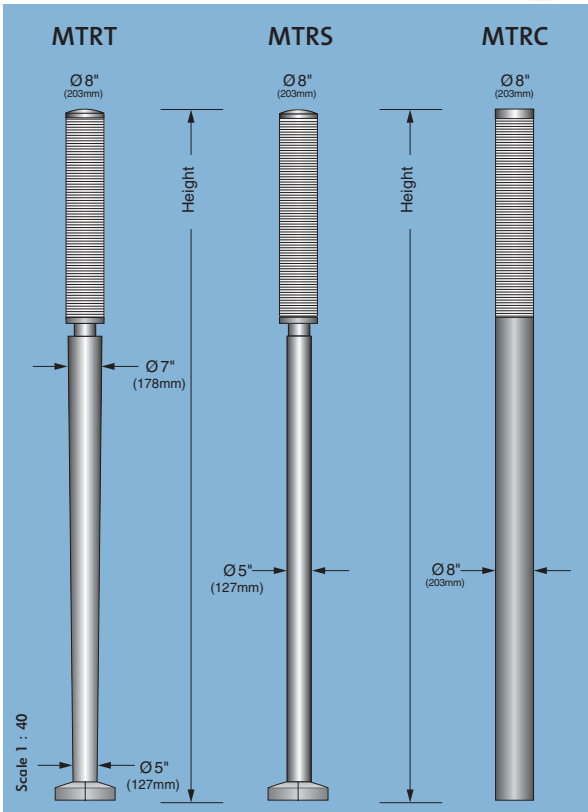


MTR

# Column

se'lux®

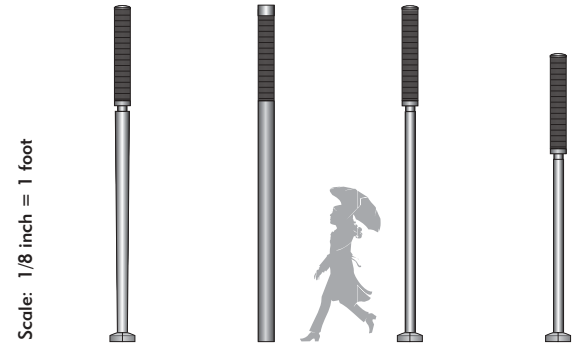

- Construction**
- Die-cast aluminum cap and column fitter
  - Natural galvanized or painted steel column
- Lamping/Optics**
- 1, 2, 3 or 4- T8 fluorescent 32 watt lamps
  - Patented MTR refractor rings reduce glare and enhance visual comfort
- Design Options**
- Three column designs
  - Mount above grade with base cover or below grade for smooth column transition from ground
- Finish**
- Multi-step process, high quality polyester powder coat finish (CLICK HERE FOR DETAILS)
- Certifications**
- UL and ULC listed
  - IP 54
  - ASTM and PCI

## Ordering Matrix

For details and specifications, see current spec sheet (CLICK HERE)

**Series** | MTRT MTR Column Tapered | MTRS MTR Column Straight | MTRC MTR Column 8 Straight

**Height** | 12 Twelve Feet | 14 Fourteen Feet | 16 Sixteen Feet

**Lamping Fluorescent** | 1T8 1xF032T8 | 2T8 2xF032T8 | 3T8 3xF032T8 | 4T8 4xF032T8

**Finish** | BK Black | WH White | BZ Bronze | SV Silver | SP Specify RAL#


**Voltage** | 120 | 277 | 347

**Options** | REC GFCI Receptacle

CLICK HERE FOR LAMP INFO.

## Photometry

## Lamping/Distribution Options

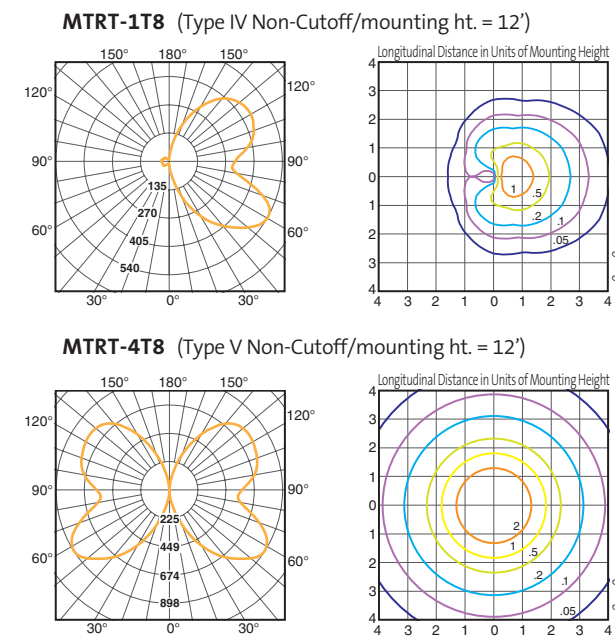

- 1T8**
  - Light directed in one direction only
- 2T8**
  - Light directed in two opposite directions
- 3T8**
  - Light directed in three directions
- 4T8**
  - Light directed evenly in all directions