



# Saturn 3



# selux



## Ordering Matrix

For details and specifications, see current spec sheet ([CLICK HERE](#))

**Series** | SA3 Saturn 3

**Shielding** | **SP** Type V Silver Louver | **WP** Type V White Louver | **MR** Type V MTR 150 Refractor

**Mounting** | **1** Single | **2** Double | **W** Wall Mount

**Lamping MH** | **H050\*** 50w | **H070** 70w | **H100** 100w

**Lamping HPS** | **S050\*** 50w | **S070** 70w | **S100** 100w

**Voltage** | **120** | **208** | **240** | **277** | **347**

**Finish** | **BK** Black | **WH** White | **BZ** Bronze | **SV** Silver | **SP** Specify RAL#

**Options** | **HS** House Side Shield (180°)

\* Only available in 120v and 277v

[CLICK HERE FOR POLE INFO.](#)


[CLICK HERE FOR MOUNTING ARM INFO.](#)

[CLICK HERE FOR LAMP INFO.](#)

## Photometry

## Shielding Options

SA3-SP-1-H100 (Type V Cutoff/mounting ht. = 16')

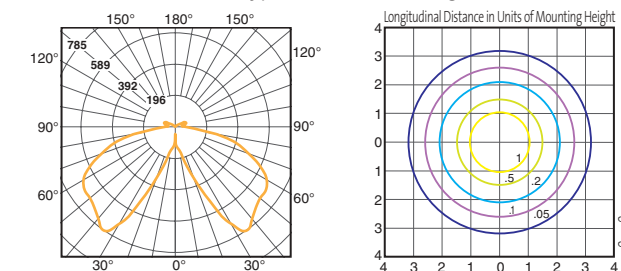

### Silver Louver (SP) - Type V Cutoff

- "Dark Light" effect offers superior visual comfort
- H100. Max Candela = 785 at 35° from vertical



### White Louver (WP) - Type V Cutoff

- Brightness Control with subtle source luminance
- H100. Max Candela = 839 at 60° from vertical




### MTR 150 (MR) - Type V Cutoff


- Minimum Intensity at critical viewing angles
- H100. Max Candela = 893 at 55° from vertical

For more options, see our website at [www.selux.com/usa](http://www.selux.com/usa)

SA3-MR-1-H100 (Type V Cutoff/mounting ht. = 16')

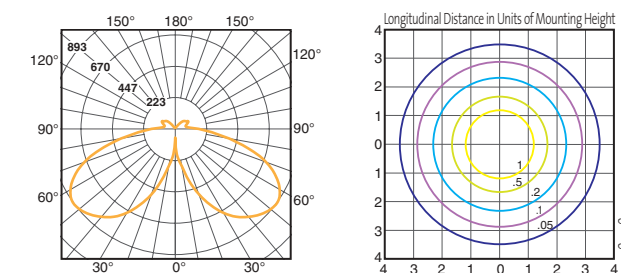

## SA3-xx-1



Scale 1 : 30

### Construction

- Die-cast and formed aluminum components
- Clear UV-stabilized acrylic diffuser
- Stainless steel fasteners
- Sealed optic chamber

### Lamping/Optics

- H.I.D. lamping 50w to 100w
- Three refractor options
- Type V distribution
- Cutoff classification

### Design Features

- Double shade creates self-illuminating glow and unique night time appearance

### Finish

- Multi-step cleaning and sealing process, high quality polyester powder coat finish ([CLICK HERE FOR DETAILS](#))

### Certifications

- UL and ULC listed
- IP 54
- ASTM and PCI for finish