



Beta

Pendant



Construction

- Die-cast and spun aluminum components
- Stainless steel fasteners
- Precision anodized reflectors
- UV-stabilized polycarbonate globe or tempered glass lens
- Completely sealed optic chamber

Lamping/Optics

- H.I.D. lamping 50w to 175w
- Type II, III and V distributions
- Cutoff and Full Cutoff classifications

Design Options

- Choice of open or closed versions
- Choose flat or sag tempered glass lens
- Single, double or wall mount

Finish

- Multi-step cleaning and sealing process
- High quality polyester powder coat finish (CLICK HERE FOR DETAILS)

Certifications

- UL and ULC listed
- ASTM and PCI for finish



Ordering Matrix

For details and specifications, see current spec sheet (CLICK HERE)

Series | BPO Beta Pendant open | BPC Beta Pendant closed

Shielding | D Polycarbonate Diffuser | L Tempered Glass Lens | S Sagged Glass Lens

Reflector | R3 Type II/III Aluminum reflector | R5 Type V Aluminum reflector

Mounting | 1 Single | 2C Double Cluster | 3C Triple Cluster | 4C Quadruple Cluster | W Wall Mount | P Pendant

Lamping MH | H050* 50w | H070 70w | H100 100w | H150 150w | H175 175w

Lamping HPS | S050* 50w | S070 70w | S100 100w | S150 150w

Voltage | 120 | 208 | 240 | 277 | 347

Finish | BK Black | WH White | BZ Bronze | SV Silver | SP Specify RAL#


* Only available in 120v and 277v

CLICK HERE FOR POLE INFO. CLICK HERE FOR MOUNTING ARM INFO. CLICK HERE FOR LAMP INFO.


Photometry

Fixture Options


BPC-L-R3-1-H175 (Type II Full Cutoff/mounting ht. = 16')

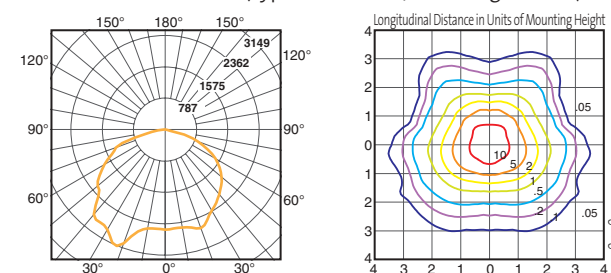

BPC-L-R5-H175 (Type V Full Cutoff/mounting ht. = 16')

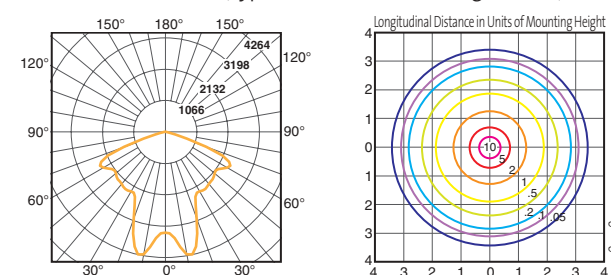

- (BPO-D) Beta Pendant - open - pearled diffuser**
 - 12" radius steel arm supplied with fixture
 - Upper diffuser provides pleasing uplight giving fixture self-illuminating glow
 - Vacuum formed, UV stabilized globe
- (BPC-D) Beta Pendant - closed - pearled diffuser**
 - 12" radius steel arm supplied with fixture
 - Closed version minimizes uplight for installations where subtlety of light source desired
 - Vacuum formed, UV stabilized globe
- (BPO-S) Beta Pendant - open - sag glass lens**
 - Tempered glass lens brings a different dimension to fixture
 - Upper diffuser provides pleasing uplight giving fixture self-illuminating glow
- (BPC-L) Beta Pendant - closed - flat glass lens**
 - Full Cutoff classification
 - Closed version minimizes uplight for installations where subtlety of light source desired

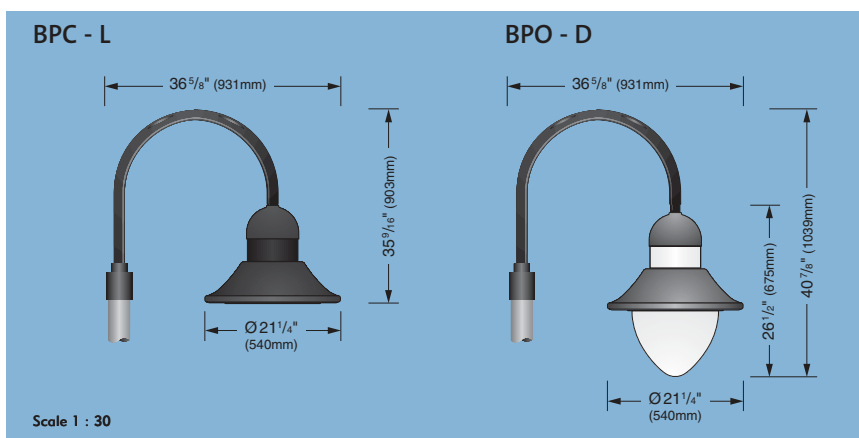

For more options, see our website at www.selux.com/usa