



CDO

Ovalette

se'lux®

Construction

- Die-cast and extruded aluminum components
- Stainless steel fasteners
- Borosilicate glass lamp enclosure
- Completely sealed optic chamber

Lamping/Optics

- H.I.D. lamping to 100w; 32 or 42 watt compact fluorescent
- Patented MTR refractors reduce glare at critical angles for visual comfort

Design Options


- Custom heights available
- Handsome wall mount option

Finish



- High quality polyester powder coat finish (CLICK HERE FOR DETAILS)

Certifications

- UL and ULC listed
- IP 54
- ASTM and PCI for finish

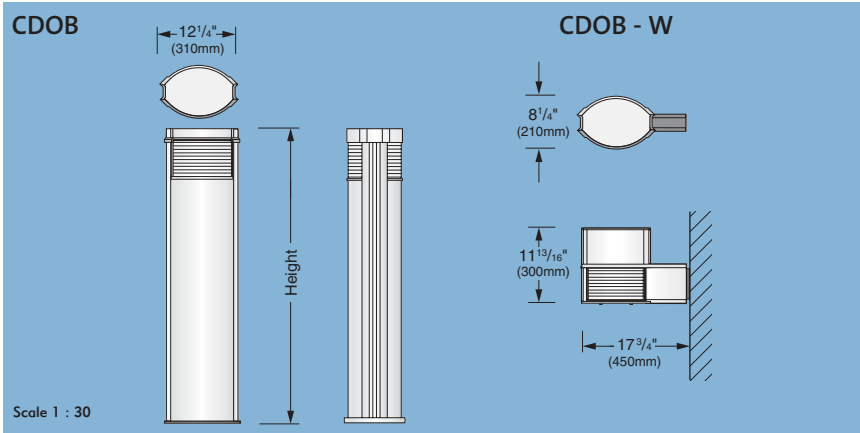

Scale: 1/8 inch = 1 foot

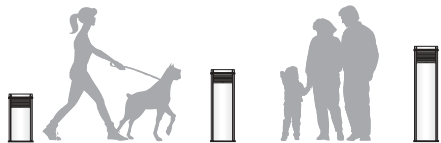

Ordering Matrix

For details and specifications, see current spec sheet (CLICK HERE)

Series | CDOB CDO Ovallette

Mounting Height | **2** Two Feet | **3** Three Feet | **4** Four Feet | **W** Wall Mount | or Specify Custom Height

Lamping MH | **H050*** 50w | **H070** 70w | **H100** 100w

Lamping HPS | **S050*** 50w | **S070** 70w | **S100** 100w

Lamping Compact Fluorescent | **F32**** 32w | **F42**** 42w

Finish | **BK** Black | **WH** White | **BZ** Bronze | **SV** Silver | **SP** Specify RAL#

Voltage | **120** | **208** | **240** | **277** | **347**

* Only available in 120v and 277v

**Not available in 208v or 240v

CLICK HERE FOR LAMP INFO.

Photometry

CDOB-3-H050 (Type V Semi-Cutoff/mounting ht. = 3')

