

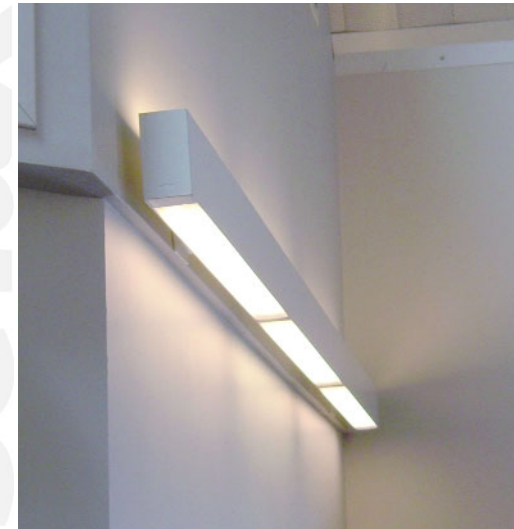





Wall M60



For specifications, see appropriate spec sheet:

([CLICK HERE](#) for M60 Direct)

([CLICK HERE](#) for M60 Direct - Staggered Lamps)

([CLICK HERE](#) for M60 Direct/Indirect)

([CLICK HERE](#) for M60 Indirect)

Ordering Matrix

M60 Linear Fluorescent Direct Wall Mount

Series | **M60** M60 Direct | **M60S** M60 Direct Staggered Lamps | **M6DI** M60 Direct/Indirect | **M6S** M60 Indirect

Lamping | **1T5** F28T5 | **1T5HO** F54T5HO | **2T5** (2x)F28T5¹ | **2T5HO** (2x)F54T5HO²

Shielding | **MP** Silky Specular Parabolic | **SD** Satine Lens | **OD** Extra Diffuse Lens

Mounting | **W** Wall

Lengths (nominal)² | **004** 4 foot | **008** 8 foot | **012** 12 foot

Finish | **WH** White | **BK** Black | **SV** Silver | **SP** Specify RAL#

Voltage | **120** | **277** | **347**






Options³ | **EM** Stand-by Battery Pack | **DMA** Digital Addressable Dimming (consult factory) | **DM** Dimming (specify desired system) | **FS** Single Fusing | **SI** Satine Acrylic Inlay (For MP Louver only) | **FW** Flex Whip (standard) | **FW1** Flex Whip (dimming) | **TRACK** (Eutrac 2-C Standard - consult factory) | **MR11** MR11 Downlight

¹ Direct/Indirect only.

² For other lengths/configurations or continuous runs, indicate nominal length rounded to the next highest foot using three digits. Factory will supply layout drawings. Individual fixtures cannot be field joined.

³ Not all options available with all systems, see website spec sheet for more details.

Surface Mount M60/M100

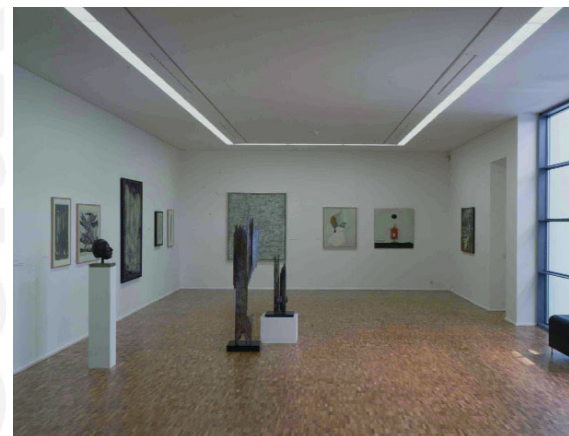

For specifications, see appropriate spec sheet:

([CLICK HERE](#) for M100 Direct)

([CLICK HERE](#) for M100 Indirect)

([CLICK HERE](#) for M60 Direct)

([CLICK HERE](#) for M60 Indirect)

Ordering Matrix

M60/M100 Linear Fluorescent Surface Mount

Series | **M10** M100 Direct | **M10S** M100 Direct Staggered Lamps | **M60** M60 Direct | **M60S** M60 Direct Staggered Lamps

Lamping¹ | **1T5** F28T5 | **2T5** (2x)F28/T5 | **1T5HO** F54T5HO | **1T8** F032/T8

Shielding¹ | **SA** Specular Parabolic | **MA** Matte Parabolic | **MP** Silky Specular Parabolic | **PL** Matte Perforated Parabolic | **SD** Satine Lens | **OD** Extra Diffuse Lens²

Mounting | **F** Surface Mount

Lengths (nominal)³ | **004** 4 foot | **008** 8 foot | **012** 12 foot


Finish | **WH** White | **BK** Black | **SV** Silver | **SP** Specify RAL#

Voltage | **120** | **277** | **347**

Options⁴ | **EM** Stand-by Battery Pack | **DM** Dimming (specify desired system) | **FS** Single Fusing | **SI** Satine Acrylic Inlay (M100 - SA, MA, MP, & PL Louvers only; M60 - for MP Louver only) | **FW** Flex Whip (standard) | **FW1** Flex Whip (dimming) | **TRACK** (Eutrac 2-C Standard - consult factory) | **DOWNLIGHTS** (see spec sheets for details)

Staggered Lamps

Add an "S" to a Series number to designate it to be a "staggered lamps" configuration for complete elimination of socket shadows (use shielding OD - Extra Diffuse Lens).
Examples: **M10S** & **M60S**



¹ M60 available with 1T5 and 1T5HO lampings only. M60 available with MP, SD and OD shieldings only




² OD - Extra Diffuse Lens is recommended for staggered lamps versions.

³ For other lengths/configurations or continuous runs, indicate nominal length rounded to the next highest foot using three digits. Factory will supply layout drawings. Individual fixtures cannot be field joined.

⁴ Not all options available with all systems, see spec sheets for more details.



Suspended M60



For specifications, see appropriate spec sheet:

([CLICK HERE for M60 Direct](#))

([CLICK HERE for M60 Direct/Indirect](#))

([CLICK HERE for M60 Indirect](#))

Ordering Matrix

M60 Linear Fluorescent Direct, Direct/Indirect, and Indirect Suspended

Series | **M60** M60 Direct | **M60S** M60 Direct w/Staggered Lamps | **M6DI** Direct/Indirect | **M6S** Indirect

Lamping | **1T5** F28T5 | **1T5HO** F54T5HO

Shielding | **MP** Silky Specular Parabolic | **SD** Satine Lens | **OD** Extra Diffuse Lens¹

Mounting | **C** Cable | **S** Stem | **RS** Rigid Stem

Lengths (nominal)² | **004** 4 foot | **008** 8 foot | **012** 12 foot

Finish | **WH** White | **BK** Black | **SV** Silver | **SP** Specify RAL#

Voltage | **120** | **277** | **347**

Options³ | **EM** Stand-by Battery Pack | **DM** Dimming (specify desired system) | **FS** Single Fusing | **SI** Satine Acrylic Inlay (for MP Louver only) | **FW** Flex Whip (standard) | **FW1** Flex Whip (dimming) | **TRACK** (Eutrac 2-C Standard - consult factory) | **MR11** MR11 Downlight

¹ OD - Extra Diffuse Lens recommended with staggered lamps

² For other lengths/configurations or continuous runs, indicate nominal length rounded to the next highest foot using three digits. Factory will supply layout drawings. Individual fixtures cannot be field joined.

³ Not all options available with all systems, see website spec sheet for more details.

