


# Saturn Magnum

se'lux®



## Construction

- Die-cast aluminum components
- Spun aluminum elliptical top shade
- Stainless steel fasteners
- Clear U.V. stabilized acrylic diffuser
- Sealed optic chamber

## Lamping/Optics

- H.I.D. lamping 50w to 175w
- Type V distribution
- Patented MTR refractors reduce glare at critical angles for visual comfort

## Design Features

- Double shade creates self-illuminating glow and unique night time appearance
- Stately, transparent and unexpectedly light in form
- Single/double pole mount, wall mount

## Finish


- Multi-step cleaning and sealing process
- High quality polyester powder coat finish (CLICK HERE FOR DETAILS)

## Certifications

- UL and ULC listed
- IP 65
- ASTM and PCI for finish



## SAMG-xx-1

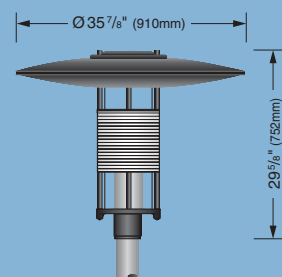

Scale 1 : 30



## Ordering Matrix

For details and specifications, see current spec sheet (CLICK HERE)

**Series** | SAMG Saturn Magnum

**Shielding** | MR Type V MTR 261 Refractor

**Mounting** | 1 Single | 2 Double | W Wall Mount

**Lamping MH** | H050\* 50w | H070 70w | H100 100w | H150 150w | H175 175w

**Lamping HPS** | S050\* 50w | S070 70w | S100 100w | S150 150w

**Voltage** | 120 | 208 | 240 | 277 | 347

**Finish** | BK Black | WH White | BZ Bronze | SV Silver | SP Specify RAL#

\* Only available in 120v and 277v

[CLICK HERE FOR POLE INFO.](#)


[CLICK HERE FOR MOUNTING ARM INFO.](#)

[CLICK HERE FOR LAMP INFO.](#)


## Photometry

## Shielding

SAMG-MR-1-H100 (Type V Semi-Cutoff/mounting ht. = 16')

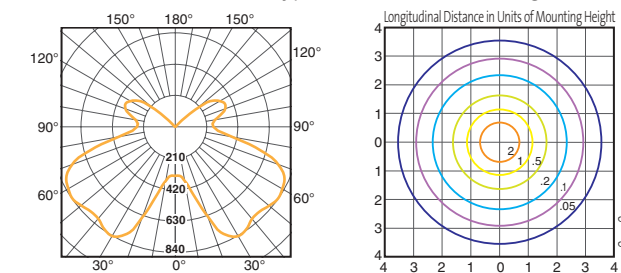

SAMG-MR-1-H175 (Type V Semi-Cutoff/mounting ht. = 16')

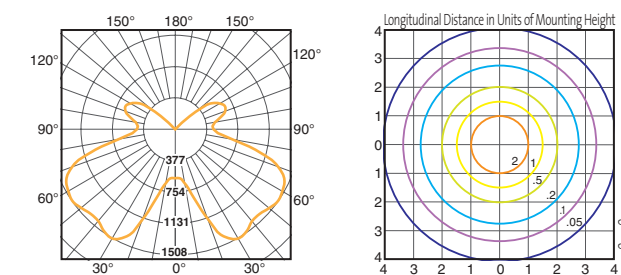

## MTR 261 (MR) - Type V Semi-Cutoff

- Directs light precisely with minimum intensity at critical viewing angles
- H100 Max. Candela = 840 at 30° from vertical
- H175 Max. Candela = 1508 at 30° from vertical