



Ritorno^{fi} RA

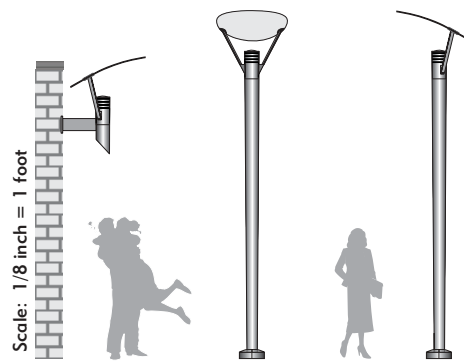

se'lux®

Construction

- Die-cast aluminum components
- Stainless steel fasteners
- High purity aluminum reflector
- Completely sealed optic chamber

Lamping/Optics

- H.I.D. lamping to 175w; T6 lamping; 85w and 165w QL induction lamping
- Uniform, virtually shadow-less illumination with extremely low glare

Design Features


- Reverse tapered pole perfectly complements fixture head design
- Handsome wall mount option

Finish

- High quality polyester powder coat finish (CLICK HERE FOR DETAILS)

Certifications

- UL and ULC listed
- IP 65
- ASTM and PCI for finish

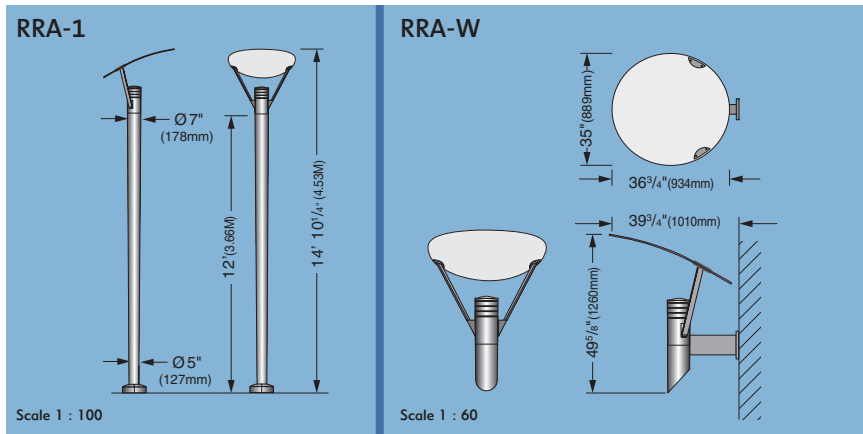

Ordering Matrix

For details and specifications, see current spec sheet (CLICK HERE)

Series | RRA Ritorno Round Asymmetrical

Mounting | 1 Single | W Wall Mount

Lamping MH | H050* 50w | H070 70w | H100 100w | H150 150w | H175 175w

Lamping HPS | S050* 50w | S070 70w | S100 100w | S150 150w

Lamping T6 MH | H070T6 70w | H150T6 150w ||| **Lamping QL Induction** | QL85* 85w | QL165** 165w

Voltage | 120 | 208 | 240 | 277 | 347

Finish | BK Black | WH White | BZ Bronze | SV Silver | SP Specify RAL#

Height | RP12 12 feet (or specify custom) ||| **Options** | REC GFCI Receptacle (pole mount only)


* Only available in 120v and 277v

** Only available in 277v

CLICK HERE FOR LAMP INFO.

Photometry

RRA-1-H175 (Type IV Non-Cutoff/mounting ht. = 16')

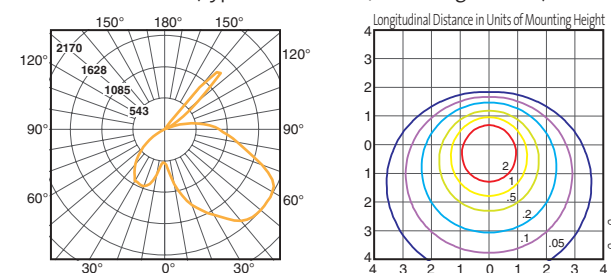

RRA-1-H150T6 (Type IV Non-Cutoff/mounting ht. = 16')

