


# Urbi Bollard

se'lux®

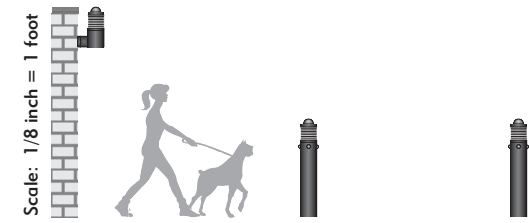

### Construction

- Die-cast and extruded aluminum components
- Completely sealed optic chamber

### Lamping/Optics

- H.I.D. and compact fluorescent lamping
- MTR Refractor for superior visual comfort


### Finish

- Multi-step, high quality polyester powder coat finish

### Certifications


- UL and ULC listed
- IP 54
- ASTM and PCI for finish

### URBB

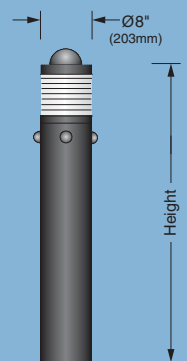

Scale 1 : 30

### URBB - W

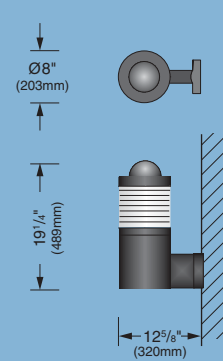

## Ordering Matrix

For details and specifications, see current spec sheet ([CLICK HERE](#))

**Series** | URBB Urbi Bollard

**Mounting Height** | 2 Two Feet | 3 Three Feet | 4 Four Feet | W Wall Mount | or Specify Custom Height

**Lamping MH** | H050\* 50w | H070 70w | H100 100w

**Lamping HPS** | S050\* 50w | S070 70w | S100 100w

**Lamping Compact Fluorescent** | F32\*\* 32w | F42\*\* 42w

**Finish** | BK Black | WH White | BZ Bronze | SV Silver | SP Specify RAL#

**Voltage** | 120 | 208 | 240 | 277 | 347

\* Only available in 120v and 277v

\*\* Not available in 208v or 240v

## Photometry

URBB-3-H100 (Type V Semi-Cutoff/mounting ht. = 3')

