


# DL32DGZ



## SQUARE ADJUSTABLE DOWNLIGHT



## PRODUCT SPECIFICATION

Cat. No. Finish

DL32DGZ-W	Matte White
DL32DGZ-B	Matte Black
DL32DGZ-SS	Brushed Stainless
DL32DGZ-IG	Industrial Gray

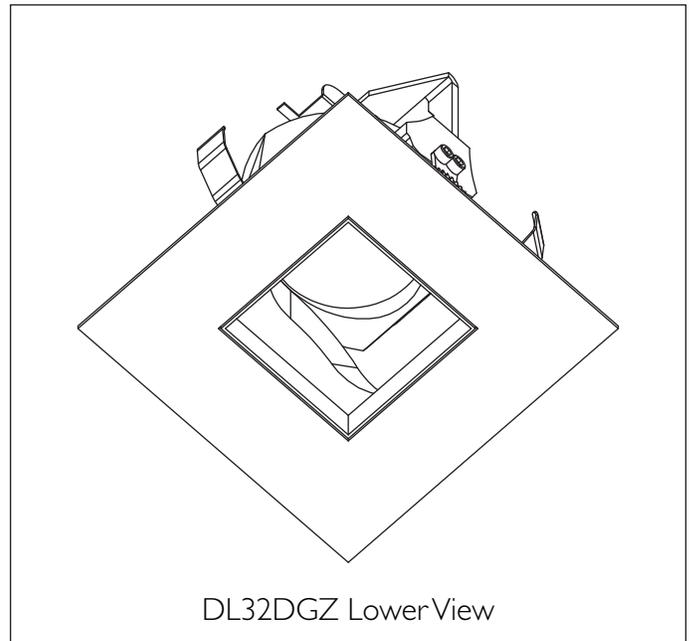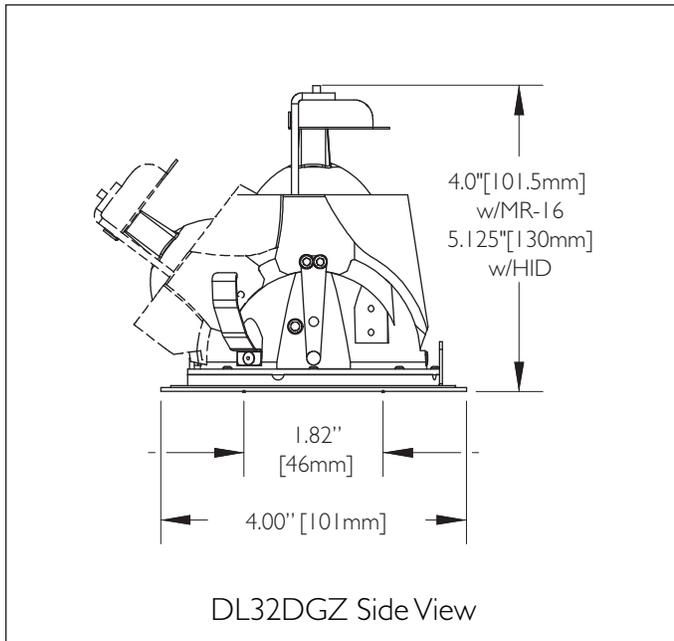

### GENERAL DESCRIPTION

Square, recessed, adjustable trim with regressed, square, black, knife edged aperture. Die cast interior baffle eliminates aperture flash and glare. Unique die cast gear driven features two axis self-locking adjustment of fixture rotation and tilt to 45° up to 5/8" ceiling, 30° with 1" ceiling. The trim is available for use with low voltage halogen, 20w MR-16 HID, or 39w MR-16 HID style lamps. Optional ceiling mounted appliqué is available for zero sightline applications. Patent pending.

### HOUSING

DHZF-MR16-50-120E recommended for MR-16, flange overlay applications in non-IC ceilings. DHZO-MR16-50-120E recommended for MR-16, zero sightline applications in non-IC ceilings. DHI/ZF will accommodate MR-16 halogen trims in IC and/or airtight installations.

DHZF-MH-ES16-39-120E (for use with 39w HID lamp) and DHZF-MH-ES16-20-120E (for use with 20w HID lamp), suitable for non-IC, flange overlay metal halide applications. DHZO-MH-ES16-39-120E, DHZO-MH-ES16-20-120E for non-IC, zero sightline, metal halide applications.

### MATERIAL

Trim is constructed of steel, aluminum, and Ryton composite resin. Painted finishes are granulated black powdercoat.

### ACCESSORIES

Trim may be accessorized with Soft Focus Lens (SFL-2), Linear Spread Lens (LSL-2), Honeycomb Louvre (HCL-2), Spread Glass Lens (SGL-2), Ultra Violet Glass (UVL-2), and Warm Tone Lens (WTL-2). NOTE: Dimensions shown above are based on one lens accessory.

### LABEL

U.L. Listed.

### LAMP

12v MR-16 halogen lamp, 50w maximum, also available with MR-16 IR energy saving lamp by Osram with 37w equivalent to 50w and 50w equivalent to 65w output, in standard beam options. Fixture also accepts new MR-16 style 39w metal halide lamp in 24° spot, 38° narrow flood or 60° flood. 20w HID available in 12° and 24° spot. Order lamp separately and specify lamp beam spread.

### WARRANTY

Manufacturer's one year warranty of product is conditioned on use of manufacturer supplied transformers or ballast.

**LUCIFER**  
LIGHTING COMPANY

3750 IH35 North  
San Antonio, TX 78219  
Phone: 800 879-9797  
Fax: 210 227-4967  
luciferlighting.com

©2007 Lucifer Lighting Company

As part of its policy of continuous research and product development, the Company reserves the right to change or withdraw specifications without prior notice.

0000-0407