





## Water Closet

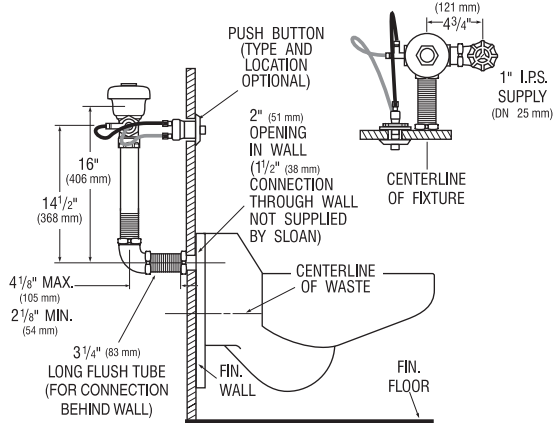

## Combination Fixture

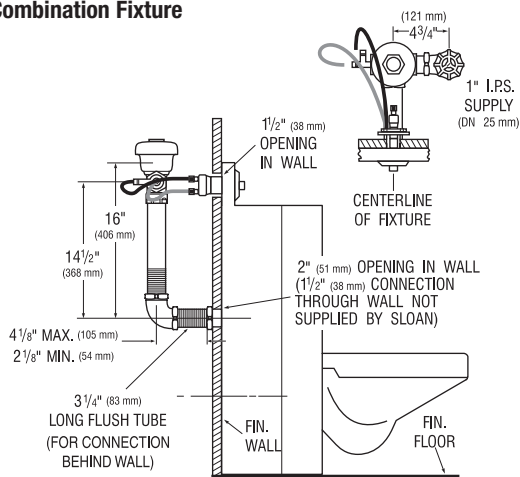

# Hydraulic Sloan® 9603 Prison Model Flushometer

## Description

Concealed Hydraulically Activated Water Closet Flushometer, for Stainless Steel back spud water closets and Combination Fixtures. For use with: Acorn® • Bradley® • Metcraft® • Willoughby® and similar fixtures.

## Flush Cycle

- ☐ Model 9603 Water Saver (3.5 gpf/13.2 Lpf)
- ☐ Model 9603-1.6 Low Consumption (1.6 gpf/6.0 Lpf)

## Specifications

Quiet, Concealed, Diaphragm Type, Rough Brass Closet Flushometer for either left or right hand supply with the following features:

- High Chloramine Resistant PERMEX™ Synthetic Rubber Diaphragm with Linear Filtered Bypass and Vortex Cleansing Action™
- ADA Compliant Non-Hold-Open feature type Actuator (specify Actuator type listed below)
- 1" I.P.S. Wheel Handle Bak-Chek® Angle Stop
- Adjustable Tailpiece
- Sweat Solder Adapter
- High Back Pressure Vacuum Breaker
- Elbow Flush Connection and Coupling for 1-1/2" NPT Back Inlet (for connection in the pipe chase — flush connection through the wall not provided by Sloan)
- Exposed parts Chrome Plated
- High Copper, Low Zinc Brass Castings for Dezincification Resistance
- Non-Hold-Open Push Button, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Low Consumption Flush Accuracy
- Handle Packing, Stop Seat and Vacuum Breaker molded from PERMEX™ Rubber Compound for Chloramine Resistance
- 100% of the energy used in manufacturing is offset with Renewable Energy Sources — Wind Energy

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037.

## Actuator Types: (please check one)

- ☐ **MBFW** Metal Button Fixture Wall Actuator (HY-100-A) (rear access)
- ☐ **MBPM** Metal Button Panel Mount (HY-108-A) for use only with Wall Box or when Access Panel is provided in combination fixture

## Variations

- ☐ **AFD** Shorter Vacuum Breaker - for use with Anti-Flood Device (Anti-Flood Device NOT provided by Sloan)
- ☐ **DFB** Dual Filtered Fixed Bypass Diaphragm
- ☐ **YB** Sweat Solder Adapter

Made In The  
**USA**



This space for Architect/Engineer approval

Job Name _____	Date _____
Model Specified _____	Quantity _____
Variations Specified _____	
Customer/Wholesaler _____	
Contractor _____	
Architect _____	

The information contained in this document is subject to change without notice.

**SLOAN®**

Made in the U.S.A.

SLOAN VALVE COMPANY • 10500 SEYMOUR AVE. • FRANKLIN PARK, IL. 60131

Ph: 1-800-9-VALVE-9 or 1-847-671-4300 • Fax: 1-800-447-8329 or 1-847-671-4380

www.sloanvalve.com

