

AC-460-2.0

Act-O-Matic® Shower Head

Description

Act-O-Matic®, chrome plated, self-cleaning, institutional security style shower head. Access behind the wall required for installation.

Flow Rate


2.0 gpm (7.5 Lpm) Maximum

Specifications

Act-O-Matic, chrome plated shower head with the following features:

- Spring loaded, self-cleaning spray disc to prevent particle clogging
- “Cone-within-a-cone” spray pattern for total body coverage
- Saves up to 20% or more water depending on length of shower
- Fast drain feature to prevent residual slow dripping
- Adjustable spray angle with pressure compensating 2.0 gpm (7.5 Lpm) flow control
- All brass construction
- Mounting studs for behind the wall installation
- 1/2" IPS inlet

Shower Head shall be in conformance to all requirements of ANSI/ASME Standard A112.18.1M, CSA B-125 and the United States Federal Energy Policy Act.

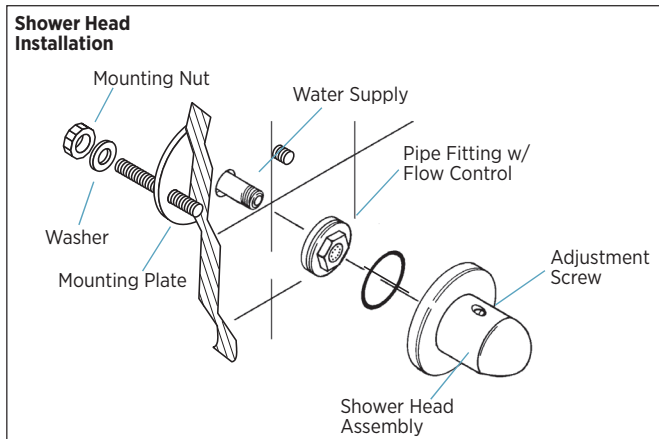


See Accessories Section of the Sloan catalog for details on these and other Shower Head variations.



Water Connects Us™

Headquarters • 10500 Seymour Avenue • Franklin Park, IL 60131
P: 847-671-4300 / 800-9-VALVE-9 • F: 847-671-4380 / 800-447-8329

The information contained in this document is subject to change without notice.

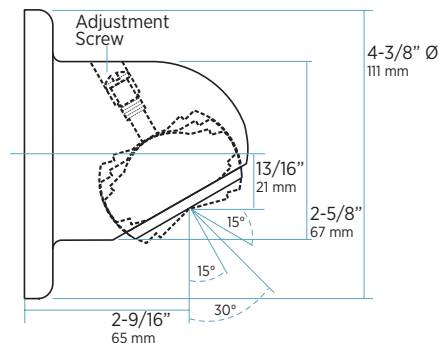

Access behind the wall
REQUIRED for installation

