


## ECO-TERR® SLABS

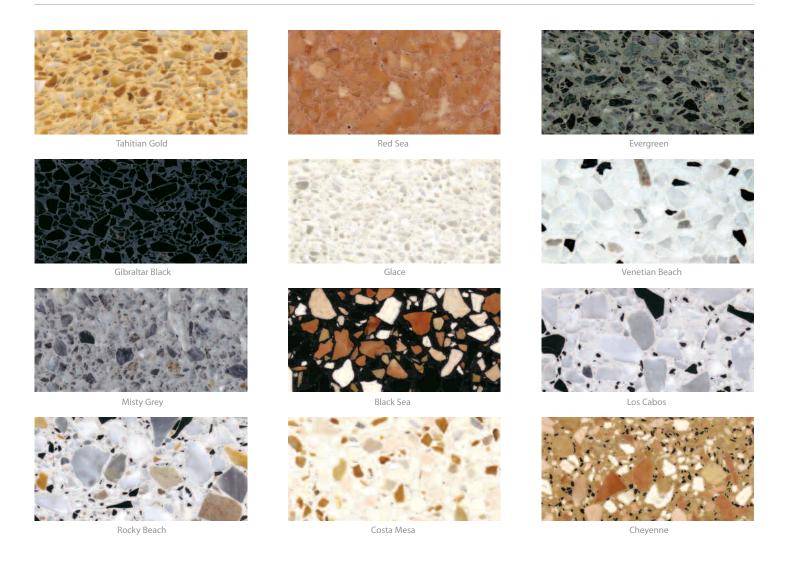

CONTENTS

80% pre-consumer recycled material. (Quarry by-product). 20% Portland cement Class 1 containing 5% Fly ash. FEATURES

Eco Friendly
Easy Maintenance
Smooth polished Finish
Non-toxic
Contributes to LEED
MR 4.1 and 4.2

**APPLICATIONS** 

Residential and Commercial Interior and Exterior Counter and Worktops FINISHES

Polished Honed (special order) SIZES

100" x 56" x 1 1/4"

Special Order:

100" x 56" x 3/4" 100" x 56" x 2"

TEST PERFORMED	ASTM	RESULTS	
Friction Coefficient	C-1028	Polished	Dry:0.64; Wet:0.61
Resistance to Fire		Class 0	
Freeze-thaw	C-666	None (300 cycles)	
Compressive strength	C-170	8,000 -12,000 psi	
Modulus of rupture	C-99	1,250 psi	
Flexural strength	C-880	1,572 psi	
Water absorption	C-97	5.2%	





