


# FPL Series Lightstones

## FIBER PAVER LIGHTS



# PRODUCT SPECIFICATION



Cat. No.	Description
FPL-05-**-**	Flush mount miniature diameter paver
FPL-10-**-**	Flush mount miniature diameter paver
FPL-15-**-**	Raised mount miniature diameter paver
FPL-20-**-**	Flush mount small diameter paver
FPL-25-**-**	Raised mount small diameter paver
FPL-30-GR-**-**	Flush mount small diameter gravel paver

\* Specify finish: **GR** (gray polymer), **A** (aluminum), **W** (white), **B** (black), **BR** (bronze), **C** (chrome), **G** (brass)

\*\* Specify acceptance core diameter

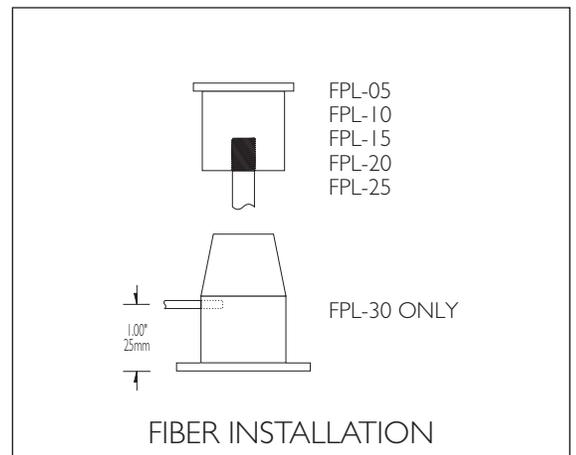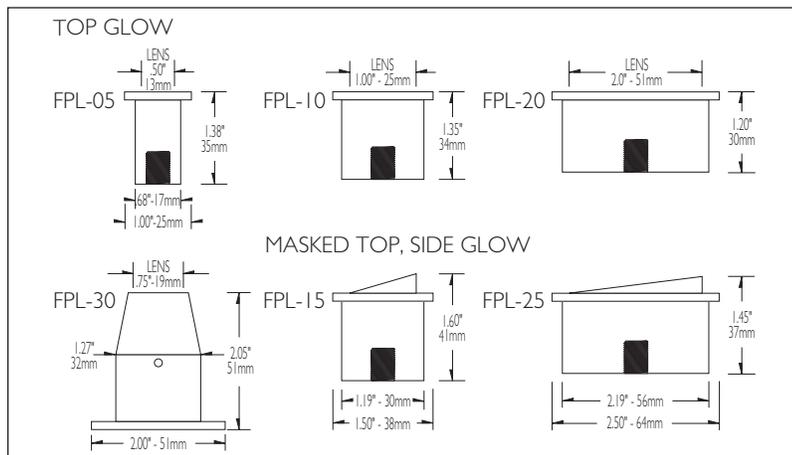

### GENERAL DESCRIPTION

Round recessed fixture series for in ground illumination. Each fixture has machined outer case with interior frosted acrylic lens. Overall fixture diameter as small as 1 1/2 inches. Top acrylic face illumination (Models FPL-10, FPL-20 and FPL-30); Masked top and side acrylic illumination only (Models FPL-15 and FPL-25). Model FPL-30 designed for recessed use in gravel beds. All fixtures are for operation with fiber optic cable and remote illuminator source which can be fitted with a color filter or wheel. Fixtures are suitable for wet locations and wash-down areas.

### APPLICATIONS

Delineation of corridors, walkways, and driveways. Adaptable for use as decorative recessed fixtures in steps, walls, ceilings, displays and casework. When recessed in ground, Top Glow models glow brightly, but do not illuminate laterally. Masked Top, Side Glow models illuminate laterally when recessed in ground or in wall. Illumination intensity is dictated by fiber diameter, length and lamp source being utilized.

### MATERIAL

Outer case material is aluminum, brass, bronze or polymer. Model FPL-30 is polymer only. Consult factory as to outer case availability in stainless steel. Inner core material is frosted acrylic.

### LAMP

There is no lamp, electrical parts or wiring in the fixture other than provision for fiber optic cable (order separately). Lamp illumination provided from remote mounted illuminator source (order separately).

### FINISH

Available finishes are: **GR** (gray polymer), **A** (aluminum), **W** (white), **B** (black), **BR** (bronze), **C** (chrome), and **G** (brass). Custom finishes available upon request.

### FIBER COMPATIBILITY

Lightstone models FPL-10 thru FPL-25 are machined to receive fiber of a designated diameter on fixture underside. Specify the acceptance (core) diameter of the fiber as follows:

Core Diameter	S.75	S1.5	S3	S8
	1/32"	3/64"	1/16"	1/8"
FBGE (Glass)	●	●	●	●
FBPE (Solid Core Plastic)				●
FBSE (Stranded Plastic)				

Core Diameter	S14	S24	S36
	5/32"	3/16"	1/4"
FBGE (Glass)	●	●	●
FBPE (Solid Core Plastic)		●	●
FBSE (Stranded Plastic)			●

Acceptance (core) diameters for the FPL-30 are restricted to S-3 fiber maximum diameter.

### COMPANION LITERATURE

Consult factory to request Fiber Optic Catalog and Specifications Order Guide.

# LUCIFER

## LIGHTING COMPANY

414 Live Oak Street  
 San Antonio, Texas 78202  
 Phone 210 227-7329  
 FAX 210 227-4967  
 www.luciferlighting.com

©2002 Lucifer Lighting Company

As part of its policy of continuous research and product development, the Company reserves the right to change or withdraw specifications without prior notice.

0989-0502