

The right light

**LUXO**



IRIS

Design Olle Anderson




IRIS





# IRIS

TECHNICAL INFORMATION: Luminaire finished in white steel plate. Diffuser in matte opal glass, lower rings in white steel. Supplied with HF ballast as standard.

4193-224 IRIS is a pendant luminaire for rooms with high ceilings, such as entrance areas, auditoriums, etc.

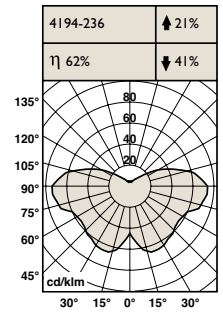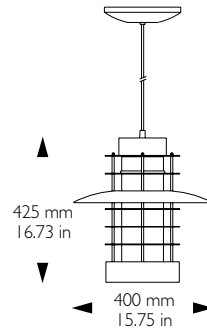

4194-236 IRIS is a pendant luminaire for rooms with high ceilings, such as entrance areas, auditoriums, etc.

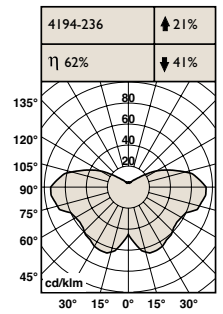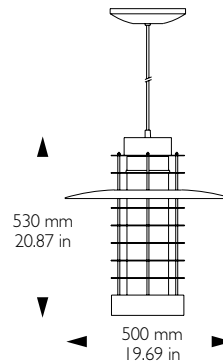

SERIES

IRIS

CONFIGURATION I

4193: 2 m / 78.74 in. Suspension cable Length H= 425 mm / 16.73 in, DIA= 400 mm / 15.75 in

4194: 2 m / 78.74 in. Suspension cable Length H=530mm / 20.87 in, DIA= 500 mm / 19.69 in

LAMPING

224: 2 X 24W CFL \*ONLY 4193\*

236: 2 X 36W PLC \*ONLY 4194\*

BALLAST

EB: Electronic HPF <10% THD

EB

VOLTAGE

UNV: Universal Voltage 120V to 277V

FINISH

STD: White

STD

SPECIFICATION SUBMITTAL

Job Name: \_\_\_\_\_ Job Number: \_\_\_\_\_

SPECIFIER (ENGINEER/ARCHITECT)

Name: \_\_\_\_\_