

The right light

LUXO



URANIA

Design Ljuskonsult Lars Bylund & Jens Ebbe Norum Siv. Ark Mnal.

URANIA



URANIA



TECHNICAL INFORMATION: The luminaire is made of white finished steel. All models are also available with acrylic disc for direct lighting. Urania 650 and 850 are supplied with fixed pendant tubes which are available in various lengths. Supplied with HF ballast as standard.

URANIA is a series of pendant luminaires for indirect light. The luminaire has a wide light distribution which means that it can be used for various environments, such as offices, schools and reception areas. It has an optional pagoda for increased light diffusion.

3515-336 URANIA





Alternative lengths (optional)
450/525/600/850/1000 mm
17.72/20.67/23.62/33.46/
39.37 in

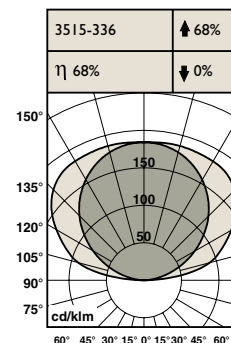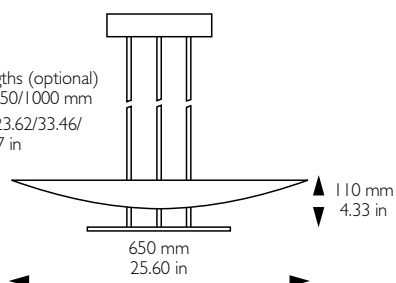

3518-455 URANIA




Alternative lengths (optional)
670/920/1070 mm
26.38/36.22/42.13 in

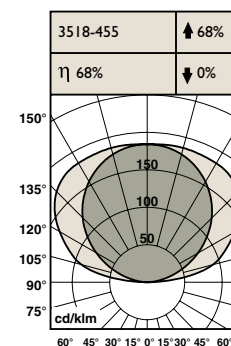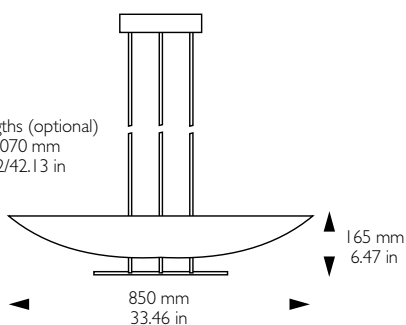



3518-655 URANIA



Alternative lengths (optional)
670/920/1070 mm
26.38/36.22/42.13 in

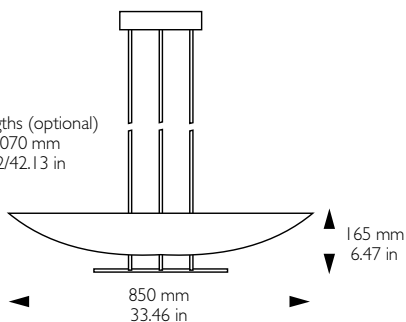

OPTIONAL TOP REFLECTORS

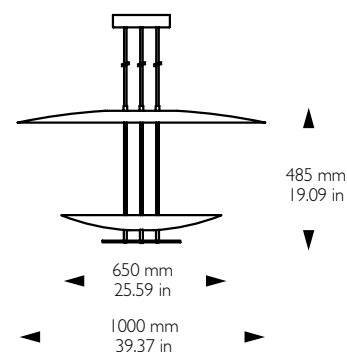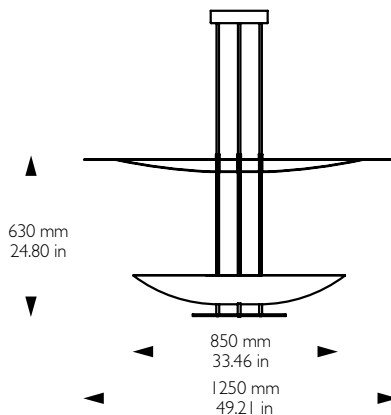

SERIES

URANIA

CONFIGURATION I

3515: Pendant, Dia = 650 mm / 25.60 in

3518: Pendant, Dia = 850 mm / 33.46 in

LAMPING

336: 3 X 36W PLL *ONLY 3515*

455: 4 X 55W PLL *ONLY 3518*

655: 6 X 55W PLL *ONLY 3518*

CIRCUIT

SG: Single

DL: Dual *ONLY 4X55W AND 6X55W*

BALLAST

EB: Electronic HPF <10% THD

EB

VOLTAGE

UNV: Universal Voltage 120V to 277V

347: 347 Volts

FINISH

STD: White

STD

FACTORY OPTIONS

I088663: Top Reflector for 3515 Dia=1000mm

I088664: Top Reflector for 3518 Dia=1250mm

I089550: Protective Glass for Light Sources for 3515

I089590: Protective Glass for Light Sources for 3518

9: Acrylic Disc

I088510: Suspension for Hook Mounting

SPECIFICATION SUBMITTAL

Job Name: _____ Job Number: _____

SPECIFIER (ENGINEER/ARCHITECT)

Name: _____