

1112AI/1121AI/1141AI

PROJECT PROJÉT

SPEC TYPE

NOTES

1112AI



1121AI



1141AI




BAFFLE OPTIONS



SAA

WH

BLK

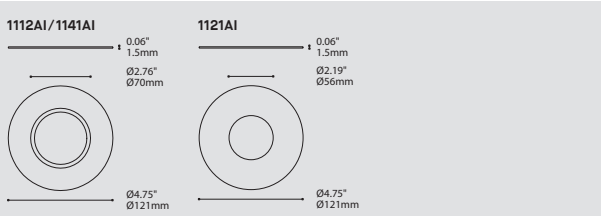

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDECODE

A complete unit consists of a trim (A) and a housing (B) selected according to light source, using the matrix below. Accessories (C) are additional options.

(A) TRIM ORDERING COMMANDE ENCASTRÉ		
MODEL	MODÈLE	
1112AI	FIXED FLAT TRIM WITH CONICAL BAFFLE	
1121AI	FIXED FLAT TRIM	
1141AI	DIRECTIONAL FLAT TRIM	

STRUCTURE FINISH FINI STRUCTURE		
BLK	BLACK	
CHR	CHROME	
S C	SATIN CHROME	
WH	WHITE	

BAFFLE FINISH FINI DÉFLECTEUR(A)		
BLK	BLACK	
WH	WHITE	
SAA	SATIN ALUMINUM ANODIZED	
(A) FOR 1112AI ONLY		

(B) HOUSING ORDERING COMMANDE BOÎTIER		
HOUSINGS	BOÎTIERS	
Select housing code in matrix below based on light source, voltage options and housing type		

(C) ACCESSORY ORDERING COMMANDE ACCESSOIRE		
ACCESSORIES	ACCESSOIRES	
1911A	FLUSH™ MOUNTING ACCESSORY	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



ø 3.50" (89mm) 35° (1121AI, 1141AI)

DESIGN:	Family of fixed and directional trim designed for an easy installation.
INSTALLATION:	Functions with remodeling, new construction or air-tight insulated ceiling housings (sold separately).
LIGHT SOURCE:	Dimmable incandescent medium base socket for PAR20 lamps.
STRUCTURE:	Die-stamped and welded 16 GA steel construction with temperature resistant plating or polyester powder coat finish.
BAFFLE:	Stamped conical aluminum baffle (for 1112AI only).
CERTIFIED:	c-UL-us
CONCEPTION:	Famille d'encastres fixes et directionnels conçue pour s'installer facilement.
INSTALLATION:	Conçu pour utilisation avec boîtier de type rénovation, nouvelle construction ou plafond hermétique isolé (boîtier vendu séparément).
SOURCE LUMINEUSE:	Incandescent à intensité variable avec douille moyenne pour lampe PAR20.
STRUCTURE:	Acier 16 GA embouti et soudé avec placage ou peinture électrostatique résistant à la température.
DÉFLECTEUR:	Défecteur conique d'aluminium estampé (pour 1112AI seulement).
CERTIFIÉ:	c-UL-us

HOUSING SELECTION MATRIX MATRICE DE SÉLECTION DU BOÎTIER

LIGHT SOURCE SOURCE LUMINEUSE	VOLTAGE VOLTAGE	REMODELING RÉNOVATION	NEW INSTALLATION NOUVELLE INSTALLATION	NEW INSTALLATION (AIR RETURN PLENUM) NOUVELLE INSTALLATION (ESPACE A RETOUR D'AIR)	NEW INSTALLATION (INSULATED CEILING + AIR TIGHT) NOUVELLE INSTALLATION (HERMÉTIQUE + PLAFOND ISOLÉ)
(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)					
1112AI					
50W, INC, PAR20, Medium Base	120V	1501C-5G.35	1601C-5G.35	1711C3-5G.35	1811C-5G.35
1121AI / 1141AI					
50W, INC, PAR20, Medium Base	120V	1501C-5.35	1601C-5.35	1711C3-5.35	1811C-5.35